
POPULAIR SCHUNGE

DECEMBER - 35 Monthly



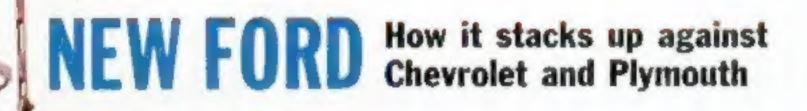

Booklet: Math Short Cuts

for the Home Owne



... there's real gift excitement in

Watch a man's eyes sparkle when he sees these attractively gift packaged Weller Power Tools. Bet he'll want to use 'em right away. And he'd never guess they cost so little.



Weller **Power Sander**

Model \$1495

Sands wood smooth in a liffy. Easy to use. Gets into corners and under low places. Fingertip "on-off" control, Assorted sandpaper and polishing cloth included.

Waller Electric Power Sanding Kit with Metal Case Madel 700K \$1695



Model \$1995

Makes every kind of cut... through wood up to 1 inch thick, plastics, composition board, aluminum, etc. And it's portable . . . use it anywhere. Three blades included.

All Weller Power Took and Suldering Gom my Gumunteed for I Year



Soldering Kit


Model \$795 8100#

Everything that's needed for quick, accurate soldering, Famous Weller Instant Heat Soldering Gun plus wire bristle cleaning brush, soldering tool and solder.

Waller Hagyy Duty Soldering Kit in Metal Care Model 8250AK \$1495

CHAIRM HINNE

WELLER ELECTRIC CORPORATION . EASTON, PA.

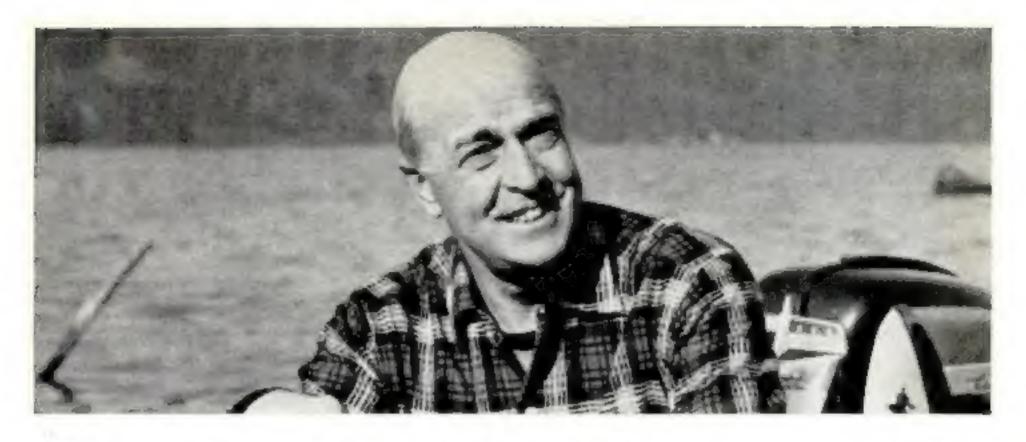

How I retired in 15 years with \$300 a month

"Here's one Yankee who's fallen in love with the South! When I retired, I moved to the Florida West Coast, I go fishing in the inlets. It's a tropical paradise, yet it's near enough to drive into Tampa often. I'm beginning a new life—all because of the check for \$300 I get each month.

"My retiring came out of a business trip to Tampa in 1942. I was dining at a restaurant and happened to notice Don Nelson, a friend of mine from New York. I went over to wish him a wonderful vacation.

"'Vacation? Why, didn't you know we moved down here when I retired?'

"I was amazed, 'But you're too young to be retired!'

"'Nonsense!' he smiled. 'It's what I'd been planning for fifteen years.' "Don invited me out to his home the next day. 'I sure envy you, I said. 'I know I never could save enough money.' Then Don explained that he never could have retired on what investments or savings he had. But he had a good salary and he had found a way to make part of his salary buy a retirement income. It was called the Phoenix Mutual Retirement Income Plan.

"Flying home, I noticed a Phoenix Mutual ad in a magazine. Sure enough, I could get a retirement income guaranteed for life if I started young enough. When I got home, I cut out the coupon and sent for the booklet telling all about Phoenix Mutual Plans. In a few days it came by mail, And there was exactly the plan for me. If I started right then—at

40—I'd be able to retire in only fifteen years with \$300 a month.

"I felt more and more pleased and secure as those fifteen years went by. I decided on the West Coast of Florida because I had old friends in that area. And as soon as my first check for \$300 arrived, I was off. Now that I'm settled, the real fun's just beginning."

Send for Free Booklet

This story is typical. Assuming you start at a young enough age, you can plan to have an income of \$20 a month to \$3,600 a year or more—beginning at age 55, 60, 65 or older. Send the coupon and receive, by mail and without charge, a booklet which tells about the Phoenix Mutual Plans. Similar plans are available for women. Don't delay. Send for your copy now,

ESTABLISHED 1851

PHOENIX MUTUAL

Retirement Income Plan

GUARANTEES YOUR FUTURE

OVER 100 YEARS OF LIFE INSURANCE PROTECTION FOR BUSINESS AND PANILIES

COPTRIGHT 1827, BY PRODUCE MUTUAL LIFE INSURANCE COMPANY

PHOENIX MUTUAL LIFE INSURANCE CO. 237 Elm Street, Hartford 15, Conn.

Please send me, without obligation, your free 28-page book showing new retirement income plans.

D Plan for Men

Home Address

D Plan for Women

Name


Date of Birth_____

Business Address

DECEMBER 1957

Popular Science Monthly

December, 1957

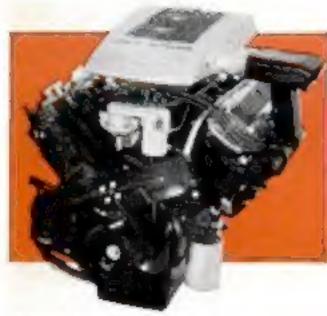

Formula: drape three two-barrel pots over the biggest engine in the business. Stir in a hot cam, Result: whoosh!



Made by man or beast? Scientists search high in the Himalayas for the Abominable Snowman

AUTOMOBILE NEWS

Comparing '58 Ford, Chevy, Plymouth '73
Olds Lowers M.P.H. to Lift M.P.G. '80
Pontiac Is Longer Than Ever '83
Why They Stretched the Caddy Hood '86
Where Mercury Got Those 400 Horses '88
\$150,000 Car Shows Way to Safer Design '92

PS SHOPPING REPORTS

How to Buy an Electric Shaver • 132 Buying a Musical Instrument • 137 What's New

- For Your Home . 142
- For the Handyman · 143
- For Your Car · 144
- ▶ For Your Leisure Hours 144
- ▶ For the Home Shop · 145

WORLD OF SCIENCE AND INDUSTRY

Science Closes In on the "Wild Man" · 96

The Dangerous Job of Moving Oil · 100

THE NEWS IN PICTURES

Aircraft Turboprops Power a Ship · 116 Satellite with Crew by 1965? · 124 Circular House Has Wedge Rooms · 126

Editor: HOWARD ALLAWAY

Frank Rowsome Ja.

Assistant Managing Editors Charles M. Garvey Kendall W. Goodwyn Robert P. Stevenson

Senior Editors
Devon Francia
Martin Mann
Everott H. Ortser
Harry Walton

Technical Editor
Habert Luckett

West Con-t Editor Wesley S. Griswold

7 POPULAR SCIENCE

Associate Editors

Erik H. Arctander
Aldes P. Armagnee
Henry B. Cometeck
Frank Dorr
Sheldon M. Gellager
Herbert O. Johannen
Herbert R. Pfister
Maryann Smith
Ruth Westphal
Richard A. Yahram

Editorial Assistants

Rosa Lee Beeland (Chief) Annette Krauss (Research) Anna Dallas, Bebe Lipson, Roberta Marks, Georgette Sparks Art Director Howard C. Jensen

Art Editors

Herbert Anthony Reginald A. Hawley Harry Samuels

Art Associates

Al Heighlagton Eric A. Kazminski Jr. Henry W. Kazmirowski Richard J. Meyer Dana B. Rasmussen

Photography

W. W. Morris (Chief) Robert D. Borst Orlando Guetta

America's Leading New-Idea Magazine for 85 Years

SPECIAL FEATURES

The Shocking Facts on Car Theft * 108
How Good Are Your School's Shops? * 112
New Record Tests Hi-Fi with Music * 182
Gus Bails Out a Teen-Ager * 192

Highs? Lows? A
new PS Test
Record checks out
your hi-fi system to
help you capture
the live sound of
live instruments



FOR HOME AND SHOP

Router Adjusts by Rack-and-Pinion · 146
Two-Speed Drill Does Double Duty · 148
New Mount Gives One-Motor Shop · 149
Bandsaw or Jigsaw? · 150
Twisting Plywood for a Screen · 156
How to Quiet Noisy Plumbing · 162

Bonus Booklet:

Math Short Cuts for the Home Owner · 169

6 Tricks with Drawer Knobs · 181

PS Fix-It File: Chair Frames • 167

Lubing Spots the Grease Man Misses · 187



No Univac needed! PS shows you easy ways to figure, measure and buy

EVERY MONTH ...

PS Readers Talk Back • 4
Keeping the Home Shipshape • 14
Prize Projects by PS Readers • 16
I'd Like to See Them Make • 18
You Ought to Know • 21

New Ideas from the Inventors • 105
PS Shop Notebook • 159
Wordless Workshop • 160
Hints from the Model Garage • 196
Short Cuts and Tips • 198

Publisher RALPH H. FLYNN

Advertising Manager Lee P. Adams

Circulation Director EUGENE WATSON EDITORIAL OFFICES: 353 Fourth Ave., New York 10, N.Y.

ADVERTISING OFFICES:

NEW YORK -353 Fourth Ave.
CHICAGO-360 North Michigan Ave.
DETROIT-820 Book Bldg.
NIN PRANCESCO-114 Sansome St.
CLEVERAND-636 B. F. Keith Bldg.
LOO ANGELED-1127 Withkire Blvd.
POUTLAND, ORE.-520 S.W. Sixth Ave.

SUBSCRIPTION SERVICE:

Address all subscriptions and correspondence concerning them to: Subscription Department, 353 Fourth Ave., New York 10, N. Y. Allow four weeks' notice for change of address. Please give both old and new addresses, including more numbers.

Published monthly at 353 Fourth Avenue, New York 10, N. Y., by Popular Science Publishing Co., Inc., Godfrey Hammond, Chairman of the Board; Ralph H. Flynn, President and Treasurer: Franklin E. Parker Jr., Secretary; Eugene Watson, Vice-President. Second-class mail privileges authorized at New York, N. Y., and Dayton, Ohio. Entered as second-class matter at the Post Office Department, Canada. Printed in U.S.A. Copyright, 1957, by Popular Science Publishing Co., Inc. All rights reserved in the United States, Great Beitain, and in all the countries participating in the International Copyright Convention and Pan-American Copyright Convention. Single copy 35c. Subscriptions to United States, its possessions, and Canada, 1 year \$3,40 (2 years \$6,00, 3 years \$8.00). Elsewhere, I year \$6.00 (2 years \$11.00. 3 years \$16.00).


PS Readers

TALK BACK

Expectant Owner Is Ready

When it comes to "being prepared" the editors of Popular Science could give lessons to the Boy Scouts. I got a kick out of reading your article "How to Take Care of an Edsel" [Sept.]—before the car had even been unveiled to the public. Reminded me of those classes they have for expectant fathers on how to feed and diaper baby.

Is there an Edsel in my future? With that grille and finless rear, here's one car

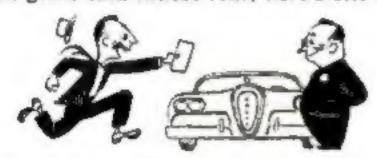

—thank heavens!—that looks a little different from the rest. I'm going to save that data on how to adjust the idle mixture and the accelerator pump—just in case my sweepstakes ticket pays off.

G. K. WORTH, Freeport, N.Y.

Warning on Meter Cabinets

Your article on living in a basement [Sept.] shows a gas meter enclosed in knotty pine. Many utility companies discourage enclosures for these reasons:

 Inaccessibility: Meters are tested for accuracy and safety about twice yearly;

replaced about every fifth year.

 Safety hazard: Any leak could cause gas to build up in the small enclosure. Chances are a homeowner wouldn't detect it until seepage from the cabinet was sufficient to cause an explosion.

I suggest that your readers consult their utility company before building an

enclosure.

A. R. Massena, Inspector, Northern Indiana Public Service Co., Gary, Ind.

Truck Wheels into Wrong Town

Even here on Thule Air Base, Greenland, I can spot a minor error in a caption in your article, "Your New Car's First Trip," September. The city you call Syracuse on page 133 is none other than my old home town—Rochester, N.Y. The street is Monroe Avenue, looking west, to be exact.

A/2C G. W. WALL, APO, NY

. . . In your story about the driver of a car "haulaway," a caption under a picture says delivery is being made in Syracuse. If this is the case, how come I got my Archer Ford in Rochester? Was this just a misprint or does the driver need to read his routing sheet more closely?

Alan Lipides, Rochester, N.Y.

That skid mark on the geography book was made by a red-faced PS editor.

Straight Talks Praised

I am writing to tell you that I can not remember ever reading a series of articles anywhere, in any magazine, that gave me more pleasure and food for thought than your series "Straight Talk to Parents."

> Dr. Coen Oosthuysen Vereeniging, Transvaal

... The August Straight Talk to Parents article ("You Can Afford to Send Your Child to College") was highly informative, but hardly does justice to the small liberal-arts colleges. These number about 750 out of the nearly 1,900 colleges and universities in America.

Parents scared away by expenses at the large universities you list might pick up



courage if they were aware that for half the cost they could send their children to thoroughly reputable institutions like Allegheny, Dickinson, Davidson, Southwestern-at-Memphia, Augustana of Illi-

4 POPULAR SCIENCE

YOUNG FAMILY MAN LOOKING AHEAD



That's an I.C.S. textbook in his hip pocket. Good to have handy. On the way to and from work, during lunch, after supper, whenever there are a few free moments, a man can train himself-in engineering, modern business, any one of 257 technical and academic courses. You learn fast because you set your own pace. You really master your subject because you can apply what you learn directly to your job. It's a method that works! I. C. S. trained men go on to become foremen, supervisors, managers, leaders in business and industry. It's smart to look ahead. Start now by looking over the list of subjects in the coupon below.

For Real Job Security-Get an I. C. S. Diploma!

L. C. S., Scranton 15, Penna.

ERNATIONAL CORRESPONDENCE SCHOOLS



Reading Arch. Cheprists Sale ART Man Commercial Art Traf Magazine & Book Illes. CH Show Card and Ana Sign Lettering Che	chasing Agunt	Drafting Machine Design	Gas-Elec. Welding Industrial Engineering	STEAM and DIESEL POWER
AUTOMOTIVE Elem Automobiles Gen Auto Body Rehalding Ret and Refinishing Pet	remanding and segment file Management file Management file Management file Management file Management file file file file file file file file	Electrical Drafting Mechanical Drafting Sheet Metal Drafting Structural Orafting ELECTRICAL Electrical Engineering Elec. Engr. Technicism Elec. Light end Procession Practical Electricism Professional Engineer (Elec.)	Industrial Instrumentation Industrial Metallurgy Industrial Metallurgy Industrial Safety Machine Design Machine Shop Practice Machine Shop Practice Professional Engineering Professional Engineer (Mach) Quarty Control Reading Shop Bleeprints Refregeration and Air Conditioning Total Making	Power Plant Engineer Stationary Diesel Engr. Bitationary Fireman TEXTILE Carding and Spinning Cotton Manufacture Cotton Warping and Wasving Learn Fizing Technician Textile Designing Textile Positions Textile Fisinghing & Dyeing Tisowing
	fessional Engineer (Cham) p and Paper Making	HIGH SCHOOL High School Diploms	General Electronics Tech.	Warping and Weaving Worsted Manufacturing
Harne		AgeBlome Addre	m	
GRy	Zone State		- Working Hours	A.M. to P.M

Preprinted reviews.

HOW TO FIX ANY PART OF A

QUICKLY--EASILY--RIGHT!



Whereke you're a beginner now you can "breeze through" any "fix-it" lob from simple carburetor adjustment to complete overhaul. Just look up job in index of MOTOR'S Brand-New Auto Repair Manual Fol-low simple step-by-step directions, clear pictures. Presto—the job is done!

No guesswork! MOTOR'S MANUAL takes you from "scratch" — shows WHERE to start, WHAT tools to use, Covers EVERY job on EVERY car built from 1949 thru 1857!

Everything Yes Need to Know "Solled Down" from 160 Official Shop Manuals

BIG NEW, REVISED, ENLARGED, Edition contains the "ment" from over 100 oppilical, shap moranis—simplified for YOU, 23,430 essential repair sacrifications, Over 1,000 bur pages. More than 2,000 "this-is-how" pirtures, 223,000 mervice and repair facts, Leads beginners every step of the way. Time-saving factory repair procedures for experts instructions and pictures as clear you CAN'T go wrong, Used by U. B. Army and Navy.

Try Book FREE 7 Days

Just that coupon. (Attach it to posteard, if you wish.) Make Manual show you what it's got. Unless you agree this is the greatest time and work saver you've ever seen — return book in 7 days and pay nothing. Mall coupon today tot Mo-TOR — Book Dept., Desk 212, 250 W. 53th St., Now York 10. N.Y.

Same FREE Offer On MOTOR's **New Truck Repair Manual**

Buick

Cadillac

Cheyrolet

Chrysler

Copper

De Soto

Dodge

Hedson

Imperiat.

Ford

Covera EVERY Job on EVERY popular make gasoline and Diesel truck made from 1940 thru 1957. For FREE 7-Day Trial check proper but in caupen below.



MOTOR'S

Brand New — Covers

All These Makes

Jees

Nash

Continental Packard

William

Lincoln

Mercury

Otdomobile

Plymouth

Fortiac

Rambler

Studebaker

Thunderbord

MAIL COUPON NOW FOR 7-DAY FREE TRIAL (Attach to Postcard if More Convenient)

MOTOR BOOK DEPT.

Desk 212, 250 W. 55th St., New York 19, N. Y. Rush to me at once (check bux expecte book you want):

- moton's New Auto atpain Manual. If O.K., I will result (plus Sic delivery charges) one month after that. Otherwise I will return the book postpoid in 7 days. (Foreign prior, send at will will still after.)
- moron's New TRUCK REPAIR MANUAL If O.K., I will result \$5 to 7 days, and \$2 months for 3 months, plus the delivery charges with final payment. Otherwise I will return book postpuid to 7 days, (Feesign price, result \$10 meh with order,)

Print Name
Address

Stabe

Check box and save 3Sc delivery thargs by corlosing W1731 tested in cites of print payment of 56 95 or Auto Manual for 24 for Tenes 225 and 1 Same to the control of the the Contr nois, and dozens of others. Numerous recent studies have indicated that a large percentage of our leading scientists had their origins in such colleges.

> JAMES W. HAMPTON, Editor The Small College Annual Maryville, Tenn.

For more information on small liberalarts schools, write to The Small College Annual, P.O. Box 663, Maryville, Tenn.

PS Radio Is Family Favorite

"Tomorrow's All-Purpose Radio" [July] so intrigued me that I built it. Volume, tone and selectivity are so good



that it is the favorite set in our house. It even plays in the car. And it is a first-rate phono amplifier. Two questions:

1. Is the battery passing any current when it is turned on but the condenser is between stations? The speaker is silent

and no filaments are heating.

2. Can I get parts and circuits for a transistor FM radio? The antenna requirement might keep it from being portable, but portability is only one of the good things about the "radio of tomorrow."

J. A. Stafford, Tucson

The current draw from the batteries when there is no signal present is 12 milliamperes; at maximum signal it may go as high as 110 milliamps . . . Transistors and circuit components for FM are quite expensive and not readily available.

Schoolboy Weapon Repairs Tires

Maybe some of your readers remember using the old rubber-band shooter to repair solid bike tires. I have successfully used this schoolboy trick to plug nail punctures in my car's tubeless tires.

The shooter is just a piece of heavygauge wire, forked at one end and hooked at the other. When loaded with rubber bands, the wire is poked into the punc-

WHAT HAPPENS WHEN A MAN DECIDES TO DO SOMETHING ABOUT HIS FUTURE.

The proven rule of "learn more to earn more" took M.E.F. (name on request) from a position of truck driver to that of an accounting executive in sixteen months. Listen to what M.E.F. says:

"I was driving a truck—working long hours and not making much money. I had a burning desire to better myself in life, and decided to enroll with LaSalle. I went along driving my truck days and studying nights and got my first break after completing 35 assignments. I took a cost accounting position. Within one month after starting full-time, I received my first raise, thereafter followed more. One of the greatest thrills of my life came just nineteen months after I started with LaSalle. When our firm opened up a branch office, I was assigned to take charge of the Accounting Department and my salary has doubled."

M.E.F. took a proved road to success-and his letter is typical of the thousands we have in our files from men and women in all walks of life.

YOU DESERVE SUCCESS

There is no reason why you can't win success through LaSalle's Accounting Training. Today the demand for good accountants far exceeds the supply. This spells real opportunity to the man who is prepared.

You need no special talents to become a success in Accounting. You do not even need a preliminary knowledge of bookkeeping. All you need is the will to work-to achieve success perhaps years sooner.

Under the LaSalle Problem Method you can acquire a thorough knowledge of Accounting you can master its fundamental principles-become expert in the practical application of those principles. You learn by doing-without losing any time from your present work. You train directly under the supervision of a competent staff of Certified Public Accountants and accounting experts.



TWO FREE BOOKS

We offer you a FREE SAMPLE LESSON so that you can prove to yourself that you can master Accounting-quickly, thoroughly-in spare time at home. You'll see exactly how LaSalle's famous "problem method" works . . . how you are led step-by-step through actual accounting work-learning by doing and not by study of theory alone. Along with the sample lesson you will receive FREE the valuable book, "Opportunities in Accounting." It explains how we train you from the ground up-or from where you are now-according to your individual needs.

Send the coupon RIGHT NOW. Don't lay it aside and say you'll do it later. It can be the means of your SUCCESS-perhaps larger auccess than you have ever dreamed. At least it's worth considering.

ACCREDITED MEMBER, NATIONAL HOME STUDY COUNCIL

SEND	FOR FREE BOOK	
	LaSalle Extension U —A Correspondence Inst Dept. 1283-it 417 S. Deerbern St., Please send me, free of all coet sample lesson in Accountings illustrated book, "Opportunities in Address	Chicogo 5, III. or obligation, a liso, your latest in Accounting."

Crearpited reviewd



AUTO MECHANICS

A better job with more pay will mean better living for you. It can mean a fine home, a new car, nice vacations, and good educations for the kids. If you would like to earn up to \$125 a week and more—and be able to afford better living, train yourself in Auto Mechanics. You can do it with CTI showing you how—and you can learn at home in spare time!

GOOD JOSS ARE WAITING EVERYWHERE because there are over 60 million cars and trucks on the road—7 million new ones each year. One-third are in the heavy-repair classification. Skilled mechanics are needed to keep these cars operating. You can be one of them—make big money, enjoy lifetime security—even open a shop!

farn AS YOU LEARN just as many CTI students do. They make up to \$15 a week and more in spare time. Some start their own shops by graduation time. CTI Shop-Method Home training, based on resident school practice, makes every step easy.

DIESEL MECHANICS OR BODY-FENDER TRAINING is also yours at no extra cost. A wonderful chance to give yourself a well-rounded education, Only CTI gives you this extra choice! Get the facts: Mail coupon.



YOU PRACTICE WITH THIS TUNE-UP KIT

Kit includes a Compression Tester, a Vacuum Gauge and Fuel Pump Tester, an Ignition Timing Light, and a portable steel case. These professional instruments help you locate engine troubles, let you get useful practice. You keep this kit!

MECHANIC'S TOOLS TOO

You'll use these tools to get real experience. They'll increase your interest, atamp you as a "pro." You'll earn spare time cash with them. No extra cost for tools—you keep them.



MAIL COUPON TODAY!

MAIL TODAY FOR 2 FREE BOOKS

	TRADES INSTITUTE Ave., Chicago 26	[con con]
Send your new Sample Lassen,	Auto Mechanics book en BOTH FREE,	No. of Concession, Name of Street, or other party of the Concession, Name of Street, or other pa
Name	Aşe	
Address.		
City	Zone State	


ture, the rubber bands are cut free at the top, and the wire is withdrawn.

I apply tube-patching cement generously to the hole before packing it with rubber bands. This not only lubricates the hole, but acts as a sealant.

J. J. BENEDICT, N. Evans, N.Y.

Cadets Get Ready to Roll

RECENTLY I read a pamphlet from the PS Reference Library entitled "How to Buy a New Car," and was impressed with the information in it. Each year at the Military Academy the graduating class

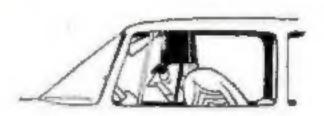

is confronted with the problem of buying cars. The automobile committee, after reading your booklet, is certain that it will greatly aid each graduating cadet when he purchases his car.

CADET JAMES H. JONES, USMA West Point, N.Y.

He Wants Jumbo Treads

THE article "How to Buy Good Retreads" [Sept.] set me to thinking.

Why not double or triple the thickness of the tread? It would not only last longer, but blowouts would be fewer. With occasional inspection of the tread, you could extract nails before they penetrated the tube.

ANDREW VENA, Philadelphia

Heat is one factor that limits tread thickness. The heavier the tread, the more heat it builds up under flexing. Inflate hard enough to reduce flexing and the ride becomes hard. A thick tread would slowly change the wheel-to-road ratio, too. You'd be in "high gear" when the tire is new, come down as it wears.

A Safer Plug for TV Sets?


IN THE October "You Ought to Know" column, you suggest using a neon tester to make sure your TV set is plugged in safely. Since a hazard exists only when the plug of an AC-DC appliance is incorrectly inserted in a wall outlet, why don't set manufacturers put a simple built-in indicator on the line cord? Why not a neon tube in the plug itself, wired so that

Copyrighted mission

FOR GOOD PAY JOBS IN TELEVISION-RADIO

America's Fast Growing Industry Offers You Good Pay—Bright Future—Security

NRI TRAINED THESE MEN



Have my own Radje. The about Average about 1100 in work we are indiverting the SR training my best investment. LARLY P. Morr, Mainly, Fla.



"Am doing Radio and Television Revening by I line. Now have my own these town my merces in NRI"— Curris frage.

"Am with WCGC, NR!
course can't be best. No
trouble passing lat rises."

Radio-phone increes case."

James W Panana, Mortdia, Musicipi.



"By the time I graduated I had said for my counts, a car and tening equipment, Can service trughest john.

E. J. STERRITTENBERGER, Willey-Bruton, Chio.

"Before Intaking the NR! wourse I was employed as fitudio Engineer at RMMJ. I am now amounting."

— Ditt. Detaitt, Grand Island, Naturalia.



People look up to and depend on the Technic on more than ever before His opportunities are great and are mercasing liecome a Technician. At home and in your source time, you can cannot do this interesting, sat stying work—quality for important pair, develop confidence and sky syou need to get jobs in this vast moustry.

Start Soon to Make 10, 15 a Week Extra Fixing Sets

Nill students I nd it easy to start fixing sets for Iriends a few months after enrolling. Use the Tester built with parts NRI furnishes, to locate TV-Radio receiver troubles. Many who start in spare time, soon build full time TV-Radio businesses. Invest in training yourself—it pays big profits soon.

KRI Training Is Up-to-Date


NRI is America's oldest and largest home study Television-Radio school. More than 40 years' experience training men for success benefits you many ways. NRI methods are tested, proved. Successful graduates are everywhere, in small towns, big cities.

You Learn by Practicing with Parts NRI Sends

Clearly written, well libstrated NRI lemons teach Television-Radio-Electronic principles. Also, without extra charge, you get NRI kits developed especially to give actual practice with TV-Radio equipment. You build, test, experiment with actual Television-Radio receiver or broadcasting circuits, build, tast, testing equipment. All equipment is yours to keep. No experience ascessary, many successful NRI gradu-

ates did not finash high school. NRI has developed simplified, practical transing methods. Ambitious non can get shead fast. Mail toupon for Actual Lancon and 64-page Catalog PREE See how contrained to get about.

The Tested Way

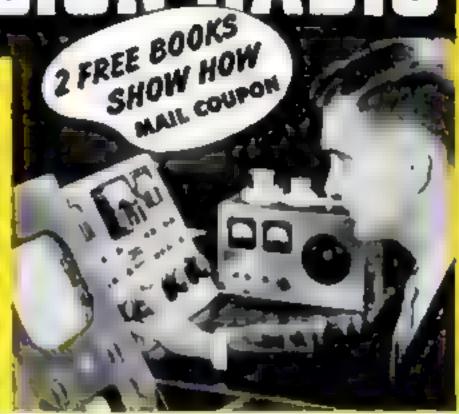

Technical Know-New Brings Better Pwy-A structs of new electronic products is increasing job and promotion opportunities for Tetramo-Radio Technicisms. Transistor Radios, Coor TV, Hi-Fl were unknown a few years ago. Guided missiles, automation, etc. would not be possible without this miracle science—Electronics.







A solid, proven field of opportunity is servicing the millions of Television and Radio sets now in one.

TV-Radio Needs Men of Action—Mail Coupon

You don't have to know anything about electricity or Radio to understand and succeed with NRI courses. You train in your own home—keep your present job white learning. Making the coupon can be one of the most important acts of your life. Do it now Resideable tuition, on low monthly payments available. Let us send you an actual leason. Judge for yourself how easy it is to learn. A 64-page catalog gives details of opportunities and training. Address MATROMAL RADIO MESUFFUE, Dept. 7708, Washington 16, D. G.


NATIONAL BA	NO HISTITUTE, DI		The ABC of SERVICINO
(yo sujerman a	t Lewen and 64-part all call #Sense write	ge Book, FREE, 1 e plantly.)	Dabatinating
Address.	7 · · · ·	Gioto.	TELEPHACINES IL
City	Zonę	State	

The car that uses more aircraft principles than any other land-bound vehicle yet built

When you look at that Dynastar Grille - those dual Vista-Vision Headlights-you know you're observing a completely restyled Buick.

And when you drive it, you very soon understand why it was named the B-58 Buick, after the most advanced airplane yet designed.

For this car uses more principles straight from the world of aviation than any automobile in history.

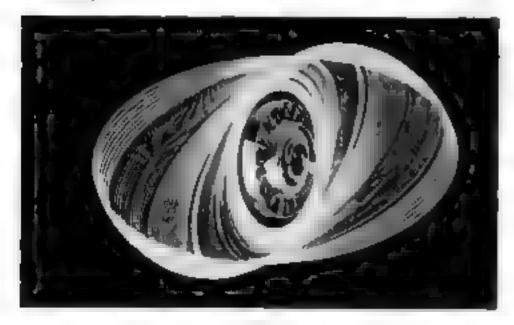

It happened that many engineering ideas that were years in development all came together in one year. And they're all here in this 1958 Buick.


Read about some of these features in this brief article. Then see your Buick dealer for a very convincing demonstration of what these features do for your driving.

1. Flight Pitch Dynaflow* Has First True, Infinitely Variable Stator — As you raise or lower your foot on the gas pedal, you automatically change the angle of the blades in this stator. You literally switch the pitch a million ways, just like today's airplane propeller. Oil, pouring through these vanes against the pump

at 180 m.p.h., is redirected to suit every driving situation. You can have maximum power ratio for starting, hills, emergencies. You can have maximum economy ratio for effortless cruising. You're always in perfect pitch.


2. B-12000 Engine Develops Thrust of 12,000 Pounds Behind Each Piston Stroke --

This is the most modern, the most efficient engine it is possible to build for today's fuels. Vertical-valved for compactness, this great power plant exerts a 10 to 1 compression—releases a thrust of 6 tons at each piston's power stroke. Combined with Flight Pitch Dynaflow, that results in superbly smooth and instantaneous

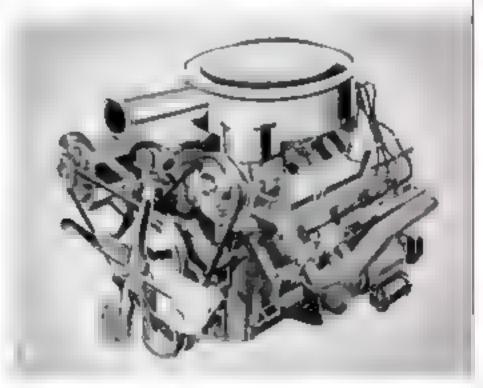

response – a sense of control utterly different from any other car of similar size and weight. Here is the first big car that's light on its feet.

3. Air-Cooled Aluminum Brakes* Run Cooler, Make More Quick Stops Without "Fade"—Aluminum absorbs and dissipates heat quickly — so Buck engineers built the front

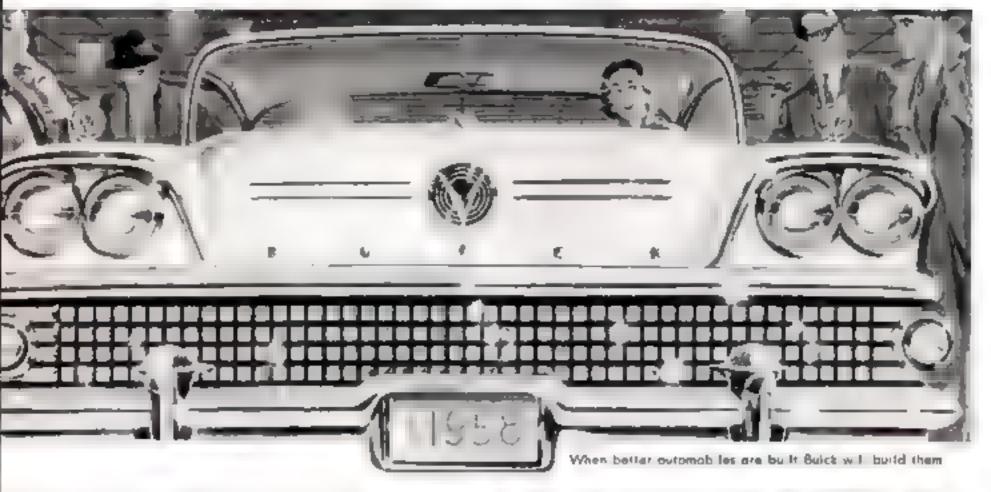

rake drums of aluminum. On each drum, they using a 45 fins, which hurl cooling air inside he brake. Still not content, they made all brake nings wider and thicker. The result: Straighter, urer, smoother braking — especially on down-racles. Longer lining-life, even in worst traffic reas.



Miracle Ride plus Buick Air-Poise Susension* is Automatically Self-Levelizing unck's new ride begins with these traditional asses: X-member frame; full-length torque abe, soft coil springs at all four wheels. These, ogether with new ride improvements such as onger stabilizers and outrigger shock absorbers, roduce a thrilling new experience that well



deserves the name, "The Miracle Ride." This same basic Buick ride engineering was made to order for air suspension — makes Buick's new Air-Poise Suspension the world's finest. Four columns of compressed air (in place of the four coil springs) give you an infinitely variable spring rate — same smoothness, same "comeback," same ideal height regardless of road or passenger weight or placement. No other ride approaches it.

BUICK Dictrion of GENERAL MOTORS

*Flight Pitch Dynaflow standard on Limited and Roadmaster 75, optional at extra cost on other Series. Aluminum Brakes standard on all Series except Special. Air-Poise Suspension optional at extra cost on all Series.

It Looks and Feels Like

The Air Born

Flight on Wheels

B-58 Buick

See TALES OF WELLS FARGO, Monday Nights, NBC-TV and THE PATRICE MUNSEL SHOW, Friday Nights, ABC-TV

the tube will glow if the plug is inserted incorrectly?

GERALD J. THOMAS, Detroit

Antennas Only Look Easy

Some time back you ran an article on buying TV antennas ["New Antennas Boost TV Pictures," Mar. J. Why not go a step further and give us detailed drawings and instructions to build our own?

To keep down cost in experimental work, 1/4" wood dowels might be used instead of aluminum tubing. I'm sure an efficient antenna could be built that would cut out interference, snow in the picture. and so on, yet be ornemental also.

A. H. SMITH, San Clemente, Calif.

Design and construction of a highperformance TV antenna is extremely complex. And the parts could cost more than a commercial antenna.

That Tape-Recording Bug

Your article on tape recorders [Sept.] certainly gave me a great deal of information on these clever machines. I am in charge of audio-visual education at Northside High School, and I've been trying to convert our English teachers from less durable records to tapes. You mention over 1,100 available selections—from bebop to dramatic readings. Can you refer me to sources?

My wife and I have been debating the merits of buying a new record player After reading the article, I think she is weakening in the direction of a tape recorder.

H. M. WILLIAMSON, Corning, N.Y.

A catalogue of pre-recorded tapes is published by M & N Harrison, Inc., 274 Madison Ave., NYC 16. The price is 25 cents.

USE AUDELS HOME APPLIANCES NEW MACHINISTS

CARPENTERS AND BUILDERS GUIDES



PRACTICAL SCORENOUSE OF MODITIVE CON-BYRUCFICH PHYORMATION 14 vol say for care-curing and all vectors have flagtenes in past-language and by prefuse flagtenes in past-language and by prefuse flagtenes principles, at heard on the NEWEST intervention. The Principles for, fundamental vol 2 Burders' magne-matics, desiring plant, specifical-only, part-matics, desiring plant, specifical-only, part-matics, etc. vol 3 Neuros and specifical-only, drying not, homologisms, size Vol 4 — Soorts, writings, size harding, military's principle, are 4 vols 1000 Pages, 2700 illustrature, while set part 100 Pages, 2700 illustrature, principles set part 100 Pages, 2700 illustrature, principles set part 100 Pages, 2700 illustrature, principles set part 100 Pages, 2700 illustrature,

7-DAY FREE EXAMINATION

SAME NO MOVEY Pay the postures nothing! We did glad to send you any of the dude! Guides for misofulately ERTE examination in your trivial horse. We take all the tisks and brave all the sheckstone up to YOU? Leve is no no belignities if you become up to YOU? Leve is no not obligation! If you become in any nor to be supply to be supply and the sheet pay the sheet winder our method of the pay pay the sheet winder our method of the same plant of only ER a month

HERE IS ALL YOU DO The EASY to CHORN in the Me-Resh Mail Order Common at the right just store a circle around the number of Austin Surday you won't as in some pieces for FARS EXAMINATION for mall send them to you at once to here you bould a belighter future by rectaining your Sales. If for any remain at an you are not constantly your factor and remain at any you are not constantly well antident, return the books to see, and that well antident, return the books to see, and that well the explines



PRACTICAL ELECTRICITY feterance Complete futrar on any Betterner Transformers of 3 -- 1 Bridge of 15 County of the County of the County of the County of the Stand 1570 Pages 1619 -- 1 Bridge of 15 County of the County of the

Chours forch r Day praigroup, Thermal, Unconnect were on for about metal, upon and from welds pressure events and monthing, commer brans became and other metals, air plane more surface turbelong hard facing, building bracing one ode Pages July Inch-build Day 17 CHECK No. 10 IF COMPAN

Bryuny Iranges Birgis Many other GAS and BUTCHER APPLIANCES many Approach for Electric E. Gay.
Servicemen Machanics, Dopping
and Homosomers, Excepting cyclety
and samply from to locate trustee,
has to lital, responde and colomost strong discreme DOS facts
four to road Antenna four page
conclusion on a manufact

REFRIGERATION & AIR CONDITIONING St. St. In .

V M C Paper Suite Money



A COMPLITE World STUDY COUNTY - Starting uses the first printiples of arithmetic mirrors, singular by along the various plages of mathematics, including the various plages of mathematics, including the various plane and color-laters for methers as and electrical problems. Here EAST correct methods includes plane and test of planestry ingressions includes plane and test of planestry ingressions in problems, calculated the etc. In a substantial time to up a substantial Table Pages, 558 Historican Priced at each 13 data New to upo trule rule ? Higgstriony Priced at only \$3

CHROLE Die ff de courbe



OF STREET BY THE PROPERTY OF STREET BY THE S



New, complete austaining in detail both domestic and its dustries all bullers includes pterirical head upe and strong diagrams fully counting the theory construction, whitelet tent, operation, taying servicing and receip of all equip-ment federal for taking ment federed for 1905 reference Dref & Pages, 380 Riost attact only \$2 Chical fin. In the course

ELECTRIC MOTORS



This Duild powers the section of the

CHICLE No. IT IN COUPON

IMPORTANT TITLES

Counters are the best to their fields, executes to clear semple. Invisity illustrated. Certic oursborn washed to the MAIL. COUPON at right. All uses for FREE EXAMPRATION.

MAIL THIS NO-RISK COUPON	T	OĽ	A	ΥÜ	fac fac
THEO. Allog, & CO — felf Improvement Publishers Since 1879 9.2.2 40 W 23rd Street, New York 56, N. Y		1		•	No.
Please mail me for T days. PREE EXAMINATION the banks I have etrebal at right. Lagrey to heat 12 in T days on such book or set ordered, and to further east in	8	•	7	•	H ₁
month on such book or set ordered until I have paid the purchase prior, plus adapping most. If I go not received orderly accorded with my Andre Gorden I may extend them.		10	11	12	N. N.
HAMP	83	34	1,5	20	10 10 10
ADDRISA.	36	W	70	29	7.2.6.3
OCCUPATION	30	31	22	20	12.2
WESTER IT	34	25	86	20	H
SAVE SHIPPING COSTS! Chark have if you underse complete populated with order. We just pushings charges. You have some return privilege.	34	39	49	45	No.

Prime II	ANTOMORIAL INTORANICE GUIDE, 1472 Pages	84-86
No 3	TRUCK & TRACTOR GUIDE 1376 Pages	5 00
No. 6	PLUMBERS & STEAMFTTTEES DUIDES & Book Set	4 00
No 7	the parties of the contract of the late of	
	PAINTING & DECOGATING MANUAL 464 Pages	2.00
Max. IF	DIESEL ENGINE MANUAL A40 Pages	3.00
Pég. 13	WIRING DIAGRAMS 304 Peace	2.00
Nu S	E-ECTRIC LIBRARY 7000 Pages. 18 Book Sut	
No. 23	BUVE PRINT BEADING AND PRINT	1.00
No 34	MASONS & BUT DERS QUIDES & Soul let	300 8.00
Php 28	OIL BUINER GUIDE 414 Pages	- 20
	O'L BUTTLE GUIDE 414 Proppi	2.00
No. 29	SHEET META: PATTERN LAYOUTE 1122 Pages	7.30
No. 38	SHEFT METAL WORKERS HANDY SOOK 44F Pages	. J. E.
No. 37	MECHANICAL DRAWING GUIDE 92 Poper	2 94
No. 32	MECHANICAL DRAWING & DESIGN. 480 Pages	2 DE
P4s 33	ELECTRONIC DEVICES 304 Pages	3.00
Ma. 36	ELECTRICIANS (XAMINATIONS 272 Pages	3 00
No. 25	FLEETER POWER CA CULATIONS 480 Fages	1.00
Ma. 34	8 ECTRIC DICTIONARY FORD THEMS	
No. 27		3.00
	POWER PLANT ENGINEERS GUIDE 1968 Pages	.4 DC
No 38	EMB NEERS AND HIEMANS EXAMS S44 Pages	Z.00
Mp. 39	OPERATING INCINEERS LIBEARY 3 Book Set	17.00
No. at	PUMPS, HYDRAU ICS & AIR COMPRESSORS, 1740 PM	mes 6 00
244 41	PUMPS, HYDRAU ICS & ARE COMPRESSORS, 1740 PumPS, HYDRAU ICS & ARE COMPRESSORS, 1740 PumPS HEATING GUIDE 1888 Pages	5.00

THESE MEN ARE GETTING PRACTICAL TRAINING

ELECTRICITY

-ELECTRONICS

On Real:

A.C. and D.C. MOTORS
GENERATORS
SWITCHBOARDS
CONTROLLERS
WIRING JOBS
APPLIANCES
ELECTRONIC UNITS


Observable to the three maining observable in and to the did dreet White technique

AND TELEVISION RADIO

On Real:

TELEVISION
RECEIVING SETS
Including Color TV
AM and FM RADIO
RECEIVERS Including
AUTO RADIOS
TELEVISION TEST
EQUIPMENT

tResht - Instructor he my the ents then he the woring and trace coronits of television receivers,

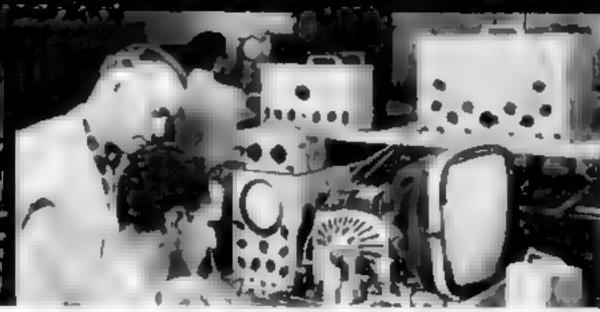

Train in the great SHOPS of COYNE

Largest, Oldest, Best Equipped School Of Its Kind In The U.S.

Whether 17 or up to 45 years of age, prepare for your future now. Don't be satisfied with a 'No Future' par Train the Coyne way for a better job in a field that offers a world of opportunities in the years ahead

FINANCE PLAN Enroll now, pay most of tuition later Part time employment help for students WE TRAIN YOU IN CHICAGO on real equip-

WE TRAIN YOU IN CHICAGO on real equipment. Trained instructors show you how, then you do practical jobs yourself. No previous experience or advanced education needed.

CLIP COUPON NOW for hig new illustrated Coyne book "Guide to Careers in ELECTRIC-ITY and TELEVISION RADIO" No obligation no salesman will call Get vital facts now! Training in Refrigeration and Electric Appliances can be included.



A,W. COOKE, dr., Proc. COYNEE 1999

A TECHNICAL TRADE INSTITUTE OPERATED NOT FOR PROFIT BOOK, PAULINA STREET CHICAGO, Dept. 97-73R ELECTRONICS

Mail Coupon for Big Free Book

Fraining Offered to VETERANG and NON-VETERANS Allky

B. W. COOKE, Jr., President COYNE ELECTRICAL SCHOOL

500 S. Paulina St., Chiengo 12, 10. Dopt. 97-73H Send FREE book and details of all the troining you offer. This does not obligate me and no salesman will call I am especially offerested in

D FLECTRICITY ELECTRONICS

☐ TELEVISION-RADIO

NAME	
ADDRESS	 ,

STATE

Keeping the Home Shipshape



guide visitors to your House at night by putting a lamp in the window with your street number on it. Colored tape on a parchment shade can easily be stripped off later.



PROTECT TABLE TOPS with scraps of linoleum. Cut into circles and oblongs, they make handy coasters when coffee is served in the living room. Put them under flowerpots, too.



TO KEEP A CHRISTMAS TREE GREEN, give it a wick so it can drink more water. Bore upward into the trunk as deeply as possible and then pack the hole with absorbent cotton.



UKE FRESH AIR AT NIGHT? You'll have lower fuel bills and a warmer house mornings if the bedroom door has a weatherstripping arrangement that drops a felt seal as the door is closed.



A HEATING PAD IN YOUR KITCHEN can come in handy. Folded, it makes a miniature warming oven for such jobs as taking the chill off dinner plates, crisping cereals or heating rolls.



ELECTRONICS TECHNICIAN



NO PREVIOUS TECHNICAL EXPERIENCE OR ADVANCED EDUCATION NEEDED!

Laborers and bookkeepers, store clerks, shop men, formers, salesmen - men of nearly every calling - have taken the DeVry Tech program and today have good jobs or service shops of their own in Electronics. You don't have to guit your present job. If you are 17 to 55, see how you may get yourself ready for a future in the fast-growing Electronics field.

Whether you prepare at home or in our well-equipped Chicago or Toronto Laboratories, you get sound, basic training In both principles and practice. At home, you use educational movies. You build actual circuits and test equipment, You read simple directions, follow clear illustrations. When you finish, you are prepared to step into a good job in an excitingly different field. You may even start a service shop of your own. Mail coupon for free facts today.

Live-Wire Employment Service



Puts you in touch with job apportunities—or heigh you toward a batter position in the plant where you are

Droft Age?

We have valuable inform for every man of shall make the if you are subject to militure service, he sure to thech the soupen.

SAMPLE LESSON

See for yourself how DeVry Tack trains you for real appartunities in flactronics. Wo'll also give you a free copy of an Interesting booklet, "Bestranics and FOU."











AN INDEX BETTER JOB. BRIGHTER



Electronics

Guided Missilas

Tolevision

Micro-Waves

Communications

Radio

Industrial Electronics

Computers

Automation Electronics

Remote Control Systems

Broodcasting

Your Own Service Shop

DeVry Technical Institute

4141 Relevant Ava., Chicago 41, III., Dept. PS-T2-N

Please give one a PREE Sample Leaven and your bestset, "Bectronics and YOU."

Plages pred 11 . . .

DOME ____ STATE

526 Repolyme Arment, Turnels 12, Ontaria

Check here if subject to military training. Du'Vry Testr's Canadian Proteing Center is load


"One of North America's Foremost Electronics Training Centers"




biforest's training, inc.



Prize Projects BY PS READERS

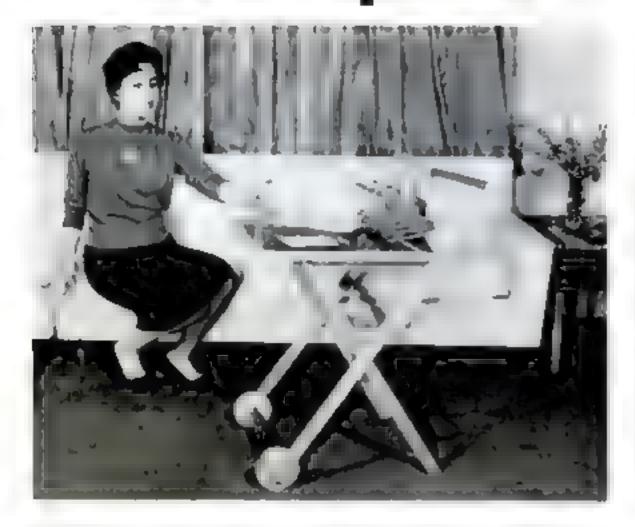

Refreshment Wagon. plywood bin and a shelf with circle cutouts keep bottles and glasses from sliding on this lightweight, twowheeled serving cart built of birch by Ralph Treves of Jamaica Estates, N.Y. The flat tray is big enough to hold a water jug, ice bucket and canape plates. The legs and crossties (supporting the tray) pivot on dowels so that the cart can be folded up for easy storage when not in use. Although he could have used 5"-diameter stock wheels, Treves cut his own on a jigsaw. Dowels serve as the axle pins.

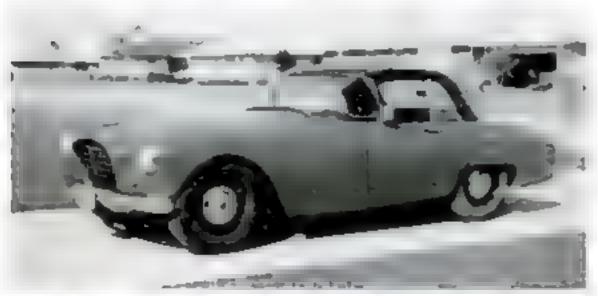

'51 Ford Fancied Up, A Thunderbird windshield accents this sports car put together during 21/2 years of spare time by Carl Roehl in his Appleton, Wis., "frameand-front" shop. The 1951 V-8 engine, moved back 22", has high-compression heads. four-barrel carburetor. dual exhaust pipes Magspark ignition.



Pipe Dream Come True. The huff-and-puff smoker often is also a collector of pipes. But keeping his smoking gear neat was a problem for Joe Fletcher of Chicago until he built this giant rack of 1/4" plywood and installed it in his den. It is 36" wide, 24" high, and has 56 compartments arranged in four tiers. The pipe pockets increase in height from top to bottom, and each pocket is lined with pool-table felt.

Flare you recently completed a workshop project of which you are particularly promo " Send a good photograph of your work along with the negative and a brief description.

to the Mechanics and Handieraft Editor, Portlan Straven, 353 Fourth Act. New York 10, N. Y. We wall pay \$15 for each item that is accepted for publication,

Make your break NOW for a BETTER job, MORE money



TRAIN AT HOME FOR EASY SUCCESS IN REFRIGERATION & AIR CONDITIONING

The time is ripe for you to get into the big, fast-growing Refrigeration and Air Conditioning field. The industry needs 20,000 newly-trained mechanics each year! Over 150 million units are in use today—and over 6 million new installations are being made annually Plenty of work at top pay! Fine opportunities to open a business! Mail coupon for facts on how to bessk in—but fast

You learn fast because you practice a with real equipment—Get experience!

No need to attend a distant resident school—to leave your family or quit your present job! Learn quickly at home in spare time by practicing with 23 kits that CTI sends. You build a refrigerator, freezer, air conditioner or milk cooler. You do 10 trouble-shooting projects—get field-type experience.

CTI trains you in months—not years—climinates a long period of low-pay apprenticeship. Training the CTI way is fun—not a chore. It's fascinating to prepare yourself for a fine income and security—in an uncrowded field where trained men are desperately in demand—where opportunities are great!

A terrific apportunity to be your own boss



Thousands of CTI graduates have gone in him and at conditioning industry in idea, for this purpose. You can open an appliance store the Coupon will bring full data at



You build a heavy-duty, commercial-type, is h.p. compressor (above). You assemble this unit in easy stages with buts that CTI sends At left are photos of set two of the 33 kets. One shows mechanics tools, the other depicts a motor fan pulley, other service tools. CTI practical training kets develop skill, provide experience, speed training!

CTI students are making good

"I have been very busy. Had an offer to work for an appliance dealer but it looks like I'll be in business for myself before long."—Frank Fuller Wells, N. Y..., "Am now working in the field. Earn \$40 more per month than before."—Frank Krotzer, Houston, Team.
"I not only got a job, but today am foreman, carning \$60 a week more than before I enrolled."—E. E. Hughes, Chicago, "Have my own business. Only problem in: Too much business."—Conrad King, Cynthia, Ky, You can do as well as these men!



"TRAINING YOU CAN TRUST"

This is the home of CTI, one of the world's great home study schools.

Over 40,000 graduates.

COMMERCIAL TRADES INSTITUTE
1400 Greenleef Avenue * Chicogo 24, Idinals



MANY STUDENTS EARN MONEY DURING TRAINING

Soon after enrolling, many students do repair work in space time. Some get part-time jobs, others make calls "on their own. Advanced students have even opened shops. With their earnings, many students pay tustion, buy additional equipment, have enough left to bank. Mail coupun for details on how to earn as you learn. No cost nor obligation.

MAIL TODAY FOR FREE BOOK AND SAMPLE LESSON

COMMERCIAL TRADES INSTITUTE

1400 GREENLEAF AVENUE CHICAGO 26, RLINOIS

Tell me from I can morelly for a botter job or a hustness of my num Send booklet Sucress in Air Conditioning & Refrigoration, and Jessen Somple, Both FREE

Mane . ____Apr

City______ Zone State



C. AMBERSON Procident CTI

BIG KITS

to build

AIR CONDITIONER REFRIGERATOR

FREEZER OF MILK COOLER

"I'd like to see them make..."




CHRISTMAS-SCENE STENCILS to make stainedglass picture windows. The black outlines of the stick-on steneil would be filled in with colored cellophane or plastic wrap.—J. Moon, NYC.



A REVOLVING ELECTRIC FRYER to eliminate standing by and turning food to prevent burning. It should lift off the motorized stand for washing.


—Raymond A. Thomas, Burbank, Calif.

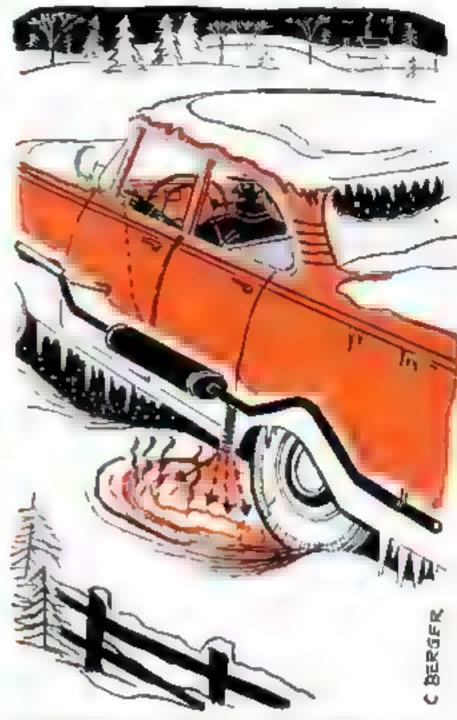

WE MELTERS for stuck cars. Short flexible pipes on a dual-tailpipe system would expel heat when the driver opened butterfly valves from the dash.—F. J. Morgan Jr., East Liverpool, Ohio.



lengthen the neck of the tube and put the hole at the side? A few twists of a threaded collar would open the tube.—Bernard Gold, NYC.

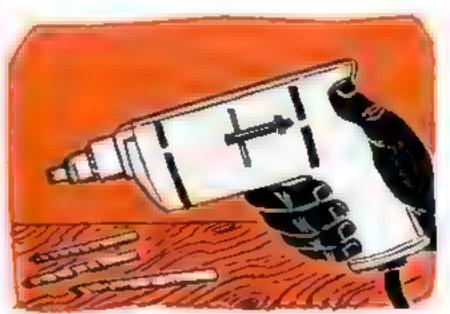


KEY-KEEPERS ON ELECTRIC DRILLS. A magnetized pocket in the housing would eliminate the search for the chuck key every time you put it down.—A. R. Peery, Harlingen, Tex.

Everyone has his own pet idea of a gadget that he would like to see in general use. The five ideas illustrated above were suggested by Port Lan Schaet readers. What is

years? We will pay \$5 for each one published, Please use Government postrards soly. Write name and address clearly. Contributions cannot be acknowledged or returned

Now available...direct to you from the Publisher

BRAND NEW EDITION OF THE WORLD FAMOUS

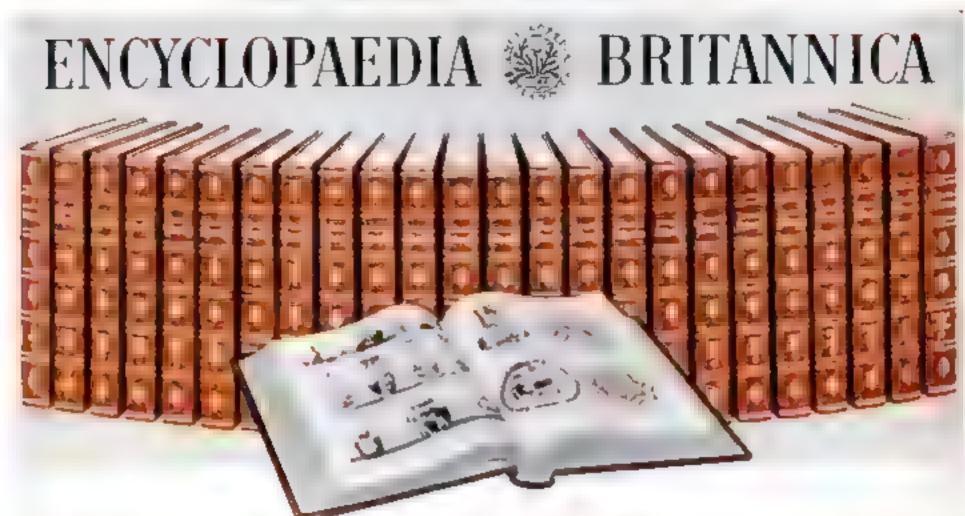

On Easy...Book a Month Payment Plan

Wee, the latest edition of Britannica—the grostest treasure of knowledge ever published—in now being offered on a remarkable, direct-from-the-publisher plan that puts this world-renowned reference tibrary within reach of sevry family All 24 volumes will be placed to your home NOW... you pay for it later on convenient budget terms. It's as easy—and as convenient—as buying a book a month.

You may wonder how we're shie to make this truly amazing offer. First, because of the great demand for this magnificent set, we have ordered a tremendous printing. Also, by offering this set Direct from the Publisher, we have seved many distribution costs. These savings are passed on to you

Thousands of Subjects of Practical Value

In the brand-new edition of Britannica you will find thousands of subjects that you and your family will refer to in the course of your normal day-to-day affairs. For example, you'll find special articles on household budgets, interior decorating, medicine and beaith, home remodeling, child care, adolescent problems, rules and regulations for all sports, every kind of hobby . . . plus a treasure house of knowledge on all subjects. Usuable information that can save you many dollars.

New Edition is Professly Hiestoled

The new Britannics almost "televises" the information to you by means of 23,494 magnificent illustrations. But it does not merely show "attractive" pictures—it is the work of 5,565 of the world's greatest authorities on all information agnificant to mankind.

Britannica Often Called Key to Success
The brand-new Britannica — the biggest

Preview Booklet Offered FREE!

Simply fill in and mail the coupon today, and we will send you. . without coat or obligation... a copy of our beautiful, new booklet which contains an exciting preview of the latest edition of Encyclopeedia Britannica. Send no money—not even for poetage, It's yours, shootately free!

In its pages, you will see the most significant scenery on the North American Continent. You'll go on a cruise to France—to the mysterious Orient—to a Pacific Island—or by rocket to the moon!

In color so beautifully eiched it gives the illusion of a third dimension, you will see art treasures of

famous museums, world landmarks...and scientific wonders.

Just as soon as we receive your coupon, we will send your illustrated free booklet. No obligation, of course. However, since this offer in necessarily limited, please mail the coupon today before it slaps your mind

and greatest edition in our almost 200year publishing history—is expressly designed to help you enjoy a richer and fuller family life, aid you in achieving greater financial rewards and success in your business or trade, help your children in school, and enable you to speak factually and intelligently on the widest range of subjects.

FREE Research Service

As a Britannica owner, you would be entitled to free research reports un subjects of your choice. These comprehensive and authoritative reports are prepared for you by members of the world-famous Britannica Research Staff, and cover subjects of important interest to you and your family.

Mail	ENCYCLOPAEDIA BRITANDICA, Dept. 36G 425 N. Michigan Avenue, Chicago I., Illinois Please serul che, free and with bit obera aim groot colorful Preview Buoklet which protests a mindress and the larest cost on of
Coupon	1 > A CLOPAFOIA BRITANNICA in esciong full detail Also
Now for	e met, direct from the publisher, on the Book a Month Payment
Free	A dme (please print)
Booklet	Addres
	In a ser to, we cit B Ltd., Terminal Bidg., Toronto, Out.



NEVER NEEDS NEW BATTERIES!


NEW REMINGTON CHARGE-A-LITE

The secret of Charge-A-Lite's revolutionary new storage battery is the newly invented Nickel Cadmium storage cell. Unlike any other battery, it's non-corrosive... holds a charge indefinitely when not in use. Charge-A-Lite is simple, rugged. It's hermetically sealed, can't leak, recharges overnight.

To recharge, just plug into any AC socket. The compact, ivory plastic case is 41/2" x 2", weighs 3.5 ounces.

Charge-A-Lite comes with spare bulb and unbreakable lens. One year warranty on sealed unit. At better stores and Remington Shaver Service Centers, or write for name of dealer.

Bright Idea for Christmas!

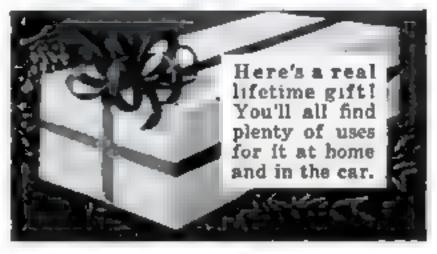

Distributed by

Resident Rand Electric Shower

Ohision of Sperry Rand Corporation, 60 Mola St., Bridgeport 2, Coan.

You ought to know...

Will Plymouth's face-lift-only hurt its popularity? Maybe Chrysler cars have sold best the year a major change was made.

With Ford and GM, the opposite is true Each has increased its share of the new-car market the year after a major change (the face-lift year), as the chart shows. If the Ford-GM pattern holds, Buick won't stand a chance of taking back the Number 3



spot in sales from Plymouth until 1959. And by then there'll be an all-new Plymouth to beat

The cake-frosting lure of extra options is the rule for '58 on all cars. Some recently reported items:

- The Auto Pilot for Chrysler and Imperial, to hold speed steady up and down hill on turnpikes.
- FM radio on one luxury car now; on many by 1960.
- Air suspension (rear wheels only) on Ambassador and Rambler, which

thus join the "pressurized-bag" parade. Will such tidbits sell cars? Automobile manufacturers are betting heavy money that they will.

The furor over radioactive fallout is boiling up again. Scientists and statesmen are worried. Said the U.S. Congress Joint Committee on Atomic Energy, hardly an alarmist group:

"Further testing [of atomic weapons] over the next several generations at the level of testing of the past five years could constitute a hazard to the world's population."

What to do about it? Hoping to cut down on atomic explosions, we'll continue to try for international agreements, no matter how tough the Russians are to deal with.

Here at home, meanwhile, look for new-and lower-limits on "permissible radiation," the amount of radioactivity that scientists figure you can safely take For example, expect these changes:


Physicians and dentists will become much more guarded in their use of X rays. Your doctor will avoid them for diagnosis (particularly if you are under 30), unless no other method will do Doctors will get new equipment—higher voltage, better shielding—and will check it frequently for leaks. You'll wear

You ought to know...

a lead-and-rubber apron for practically all X rays, even when the dentist X-rays your teeth.

Some new and disquieting measurements of atomic radiation and its effects are behind the fuss. Two factors:

- 1. Human cells seem more easily hurt by radiation than had been thought. They may be so sensitive that natural background radiation alone (from cosmic rays and radioactive materials) could emerge as a chief cause of the hereditary defects that handicap mankind. This means that a slight increase in radiation—from any source—could cause serious harm.
- 2. Exposure to medical radiation is higher than had been thought-probably, on the average, by a good half. If the first

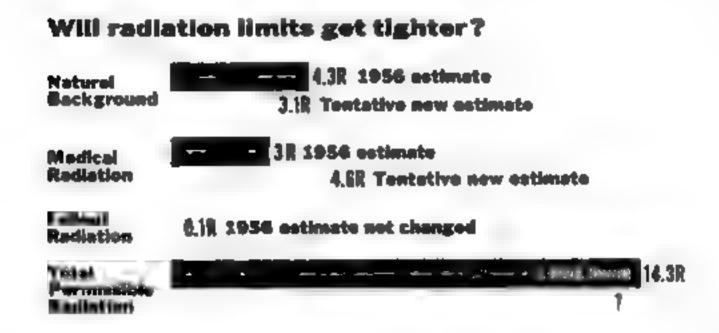

point above is substantiated, it will mean that medical radiation may already be increasing the number of defectives. No one is sure. We're trying to find out—fast.

This looks like a good time for building or remodeling, as PS predicted it would be earlier this year. But not unless you have socked the cash away (you'll find it hard to borrow).

The tight-money policy has sharply cut regular home-building. The first half of '57 was well below '56

Prices of some building materials have dropped, as one result. Lumber, millwork, plywood, plumbing equipment are all cheaper. Wallboard is about the same. But concrete, roofing, glass and paints are higher. Labor costs are up, too, although you should have no trouble finding people to do your work Best way to save, of course: Do it yourself.

Kids plaguing you with questions about satellites? They can get the answers themselves from a sprightly and informative new book, Space Satellite, written by Lee Beeland, of the Popular Science staff, and Robert Wells (\$2.95, Prentice-Hall)

Title registered, contents copyrighted

INVENTORS

Learn how to protect your invention. The U. S. Patent Laws provide that any new and useful art, machine, article of manufacture, or composition of matter, or any new and useful improvement thereof, may be patented if the act of invention is involved. Therefore, every inventor with a valuable invention should take advantage of the Patent Laws and proceed for patent protection in order to safeguard his rights.

A patent gives the inventor the exclusive right to prevent others from making, using, or selling the invention claimed in the patent for a period of seventeen years.

The Patent Laws were enacted for the benefit of the inventor to give him protection for the features of his invention which are patentable. These features must be properly and concisely set forth and claimed in a formal application for patent, in order to comply with the requirements of the Patent Laws. For that reason, unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and are prepared to serve you in the handling of your patent matters.

A specially prepared booklet entitled "Patent Guide for the Inventor", containing detailed information with respect to patent protection and procedure, together with a "Record of Invention" form will be promptly forwarded to you without obligation upon request.

CLARENCE A. O'BRIEN & HARVEY JACOBSON

Registered Patent Attorneys

72-M DISTRICT NATIONAL BUILDING WASHINGTON 5, D.C.

OWN a Nationally **Advertised Business**



\$8,750 clear PROFIT the first year on just 2 jobs a day ... personally train you, furnish all

- NO SHOP NEEDED
- START IN SPARETIME IF NOW EMPLOYED

Even if employed, enjoy the prestice and financial inde-pendence of your OWN business. We offer a lifetime op-portunity to reliable men. You will be trained to your town by a Duraclean dealer who will reveal the Duraclean System and plans for building business. He helps you get quickly established Just 2 average tobals day carns \$2,759 NIT profit the first year. Employ others. MULTIPLY profile Business grows from recommendations, repeat orders. Under our su dance you become an expert in the care of rugs and upholstery. Easy to learn. We furnish every-

YOU CAN START FROM YOUR HOME

These are full-time dealerships, but you can start partitime from home. All work done with portable equipment in homes offices, hotels, institutions. We work with you 13 months of the year, provide 25 regular services to help you build business Matienal Advertising in McCalle, House & Garden, dozen others, insurance, Complete Local Ad Kit. Publicity Program gets from newspaper stories. Monthly Magazine. Conventions. Many others.

TMREE ways to make money

A Duractean Dealership qualifies you to offer a different services. 1. OURACLEAN: Famous ABSORPTION process for cleaning rugs, curputs, upholstery Recommended by leading stores and manufacturers. NO acrubbing, soaking, shrinking Acrated foam safely removes dirt, grease. Dries so fast customers use furnishings in tew hours!

2. DURASHIELD: Soil retard of treatment that KEEPS furnishings clean MONTHS longer So new you may be first in town to offer this type service. 3. DURAPROOF: Projects against damage by moths, carpet beetles. Only such treatment backed by an International 6-year Warranty !

Send for FREE Booklet!

A moderate payment establishes your business—pay bal-ance from sales. We furnish electric machines, complete sales material enough supplies to return TOTAL investment. Our FREE booklet explains urgently needed servlarge profit, easy terms, PROTECTED territory. Bend coupon today,

DURACLEAN CO., 7-150 Duracione Sidg., Decrioid. M.

"DWN	a Busines	ss"Coupon
Place rush truy OWN s	., 7-160 Burneleen Bidg. Free booklet and letter gt growing, lifetime busines	ving full details of how E
Home		
Address	***********	*************
City		Pinio

BE AN AUTO-DIESEL **MECHANIC...EARN** WHILE YOU LEARN

Many of our graduates earn \$100 a week and up. You learn fast in our school and shops because you learn with tools on real equipment Experienced instructors expiain WHY and show you HOW then you DO IT YOURSELF One of the best equipped technical schools in the United States. Thirtyblue years experience training men Successful graduates in 48 states and many foreign countries. Approved for veterans Day and evening classes. Pres bullotin-write today

NASHVILLE AUTO-DIESEL COLLEGE 224 7th Ave. N., Dept. 42 Noshville, Tenn.

STOP THE COLD! DUCK-IT (1)4



Real comfort in cold \$7.95 climates for aportsmen. Exections computings for stolking durks, deer, etc. Keeps face, neck, and ears worm during long exposure. Worn over tare or under chin. Heavy, durable yet soft and flexible. Fits all head sizes. 100% wool. Send \$1.98 to WOOLWEAR COMPANY Bee 12 C Son Gobriel, Colff.

Get this big valuable on lection of triangle stamps. , brought to you from the wilds of Africa. Europe, exolle fatta America, etc. All genwine, all-different scarre armune, com-memoratives gight & mulget stamps. ENTRA! Bargain Catalog 'Callectors Manual' and other exciting offers. Send 10c for maring costs, Supplied

Jamestown Stamp Co., Dept. H12PS, Jamestown, N. Y.



unlimited opportunity for graduate engineers

Demand for our engineering graduates exceeds supply. Important firms rish campus requires to nerview sensors. Industria growth automation a technical apagrees create career opportunit es for engineers accompanie management experts. Share reverus awaiting colors men higher name rapid advancement Grap governments. college men higher neure rapid advancement Drays since chance for a better life now Start any quarter in this world-famed college. Approved for relevans

Bucheier of Science degree in

In Mechanical 1981 Exercical Themical Aeronaut cal Radio (TV-Electron on Entineering In 20 months 4 ft.5 in Stateurs Administration (Letteral Business Aeronating Motor Transport Management material Superior singlents may accelerate 30 weeks course in Drafting Information appears techt on furnismental supersection comprehensive courses with more professional case hours 3mail risease, personal and instruct on Enter Immited to 1888). Proparatory courses described courses Welletz, mind how and modern sed by ldings and laboratories Enter Jan Mar June Application of the students whose time and budget require accelerated courses and modern toward to the analysis of the Arian McCorthy. Research of Administration (or calsing and back Your Career in Employering and Campating

5127 College Avenue Angola, Indiano

INVENTORS

If you believe that you have an invention, you should find out how to protect it. The first step is to have a search made of the prior pertinent U. S. patents. If a report on this search indicates that the invention appears patentable you can apply for a patent, and the specifications and claims should be prepared.

The firm of McMorrow, Berman & Davidson, with offices in Washington, D. C., is qualified to take the necessary steps for you. We can make a preliminary search on your invention, advise you whether we think it can be patented, and prepare your application for patent.

Unless you are fully familiar with the U. S. Patent Laws, we recommend that you engage the services of a Registered Patent Attorney to protect your interests. The patent laws are your laws. A patent gives you the right to prevent others from making, using or selling the invention claimed in your patent for a period of 17 years.

Use these patent laws for your protection. Investigate whether your invention can be patented. If you have what you believe to be an invention, we suggest that you have this firm make a search for you.

Send for a copy of our Patent Booklet entitled "How To Protect Your Invention," containing information about patent protection and patent procedure. Along with this we will also send you an "Invention Record" form, for your use in writing down and sketching details of your invention. We will mail them promptly. No obligation. They are yours for the asking.

McMORROW, BERMAN & DAVIDSON

Registered Patent Attorneys

PATENTS • COPYRIGHTS • PATENTS
142-F VICTOR BUILDING, WASHINGTON 1, D. C.



Learn and Earn with Tester You Build

Our training includes the parts to build a sturdy, portable approance tester following our illustrated, easy-to-understand instructions. This multi-use tester helps you locate electrical defects quickly and easily equips you to do professional trouble-shooting. You use it to learn electrical appliance repair techniques. Gives you the peace-

appliance repair techniques. Gives you the practical training of actually building the tester and a valuable piece of equipment for future use.

Earn \$3,\$4,\$5 an Hour Spare Time

Start soon to repair electric tonsters, fans, trons of ners vacation, enters etc for your neighbors and friends. Spare time work done at your convenience in your basement garage of spare room can earn you from \$3 to \$5 an hour. See how easy it is to increase your earning power, how you can pay for this training many times over with the money you'll earn in your spare time. Mad coupon.

Train Now for Greater Security Low Price—Easy Terms

Today's automatic electric appliances need expert servicing. The man who knows this good trade has a secure lature Put your spare time to good use Entell now for \$2.50 down and \$5.00 a month. A

small threstment can assure a better future Address National Radio Institute Dept BN7 Washington 16. D C



FREE Lessen and Book

NATIONAL RADIO INSTITUTE

DEPT, BN7, WASHINGTON 16, D. C.

Places and me lessen and book from (No salesman will call.)

Name

Age.

Address

Zune Stote

Accredited Member National Home Study Council

Gift packaged for Christmas! MCKINNEY MAILBOXES

Complete line of handsome, fine quality mailboxes for every type of home. The only makboxes ready wrapped for Christmas giving





See your Hardware or Building Supply Dealer teday!

YOUR BEST RESOLUTION FOR 1958:

Never To Make A Wrong Turn Or Lose Directions Oriving You'll Make It, Too, With A

HULL AUTO COMPASS

For 25 Years, America's Favorite
Motoring and Boating Guide
\$6.95 and Al your dealer's or
\$5.50 write for literature

NULL MEG. CO., P. O. BOX 246-E-12, WARREN, ONIO

TO THE OWNER

Buried gold-silver-metal objects

HIDDEN THEASURE

GOLDAK CO., (544-)2 Grenoaks Blvd. Glandale, Calif.

LEARN PLASTICS



COMPLETE LOW COST SHOP METHOD HOME TRAINING NOW AVAILABLE

Oct in on Big Money opportunities in Plastic molding casting, forming, carving, etc. Earn as you learn with interstate's professionally prepared course. All plastic materials formshed,

WRITE FOR PREE BOOKLET INTERSTATE TRAINING SERVICE
DEPT. C-2, PORTLAND 13, OREGON

TELEPHONES

and ALL SUPPLIES

Room to room, house to garage, private telephone service


HANTSET CRADLE TELE-PHONES (2, Lampiete ou 6, web light with 113 cells instructions 114 93

WORM HARVESTER— Dan May Magneto davisors 6-th warms by a critically Complete with a true tons \$6.50

TELEPHONE REPAIR & SUPPLY CO.


REPAIR & SUPPLY CO, 1700 Lant Ave., Chicago 26, III






Medel 70 Ut ity Tester

Termo: \$3.65 after 18 day iris then 34 00 per month for 3 months.

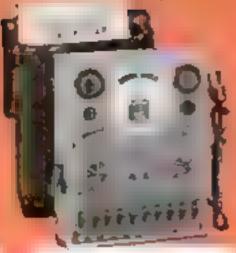

Madel TO 55 Tube Tester

Terms: \$6,83 after 16 day trini then \$5 00 per month fac 4 months.

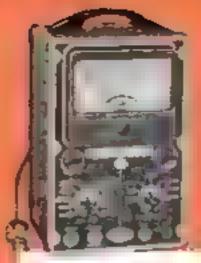

Madel 670-A Super-Mater

Terms. 27 48 after 18 day trial then \$3.50 per month for 5 menths.



Model 75

Terma: \$6.55 after 10 day trial then 55 00 per month for 4 months.

SHIPPED ON APPROVAL NO MONEY WITH ORDER - NO C. O. D.

AS AN ELECTRICAL TROUBLE SHOOTER . W Irona, Brothers Heat to Part Chick has He gerat es, Lange & Server to Sweet Ter a ser a Will test all TV tubes for open finaments, it shorts, burned out tubes, etc. (Will not test TV tube of quality An emission type lesier such as the Mostel TD-55 to required to test tubes for quality). Measure AC and DC Voltagen, Amperen, Resistancen, Lenkoge, etc. + A 55 / current communication while the appliance under test is in operation e Incorporates a sensitive direct relat-Who were the the thicks told and the for the state of the

AS AN ATTOMOTIVE TESTER a Tests both 6 Yets and 12 Volt go use Rule as 6 to a fit a fit ters a fit both for Early a fit a fit ters a fit as a fit a fit for a fit for a fit a fit for a fi H ters . Al Lamps and Darks . Furt . Heat is any cars . Hor or

Model 16 comes complete with 64 page book written in plain carrefeenaderstand language.

Quickly and Efficiently Tests Radio and TV Tubes including floren. Fig. Miniatures, Eight Pin Subminars, Octals and Lucials; Nine Ple Nevals.

Speedy, yet efficient operation is accomplished by 1 5 implification of all switching and controls 3 Exemination of old style sockets used for testing obsolute tubes (30, 21 57, 59, etc.) and providing sockets and circuits for efficiently testing the new Noval and Sub-Minut Lypes.

You can't import a take in wrong socket—It is impossible to insert the tube in the wrong socket when using the new Model TD 55 Separate sockets are used, one for each type of tube base. If the tube fits in the socket it can be tested

"Free-point" signatil switching system-The Model TD-58 incorporates a newly designed element selector switch system which reduces the possibility of obsessemence to an absolute minimum

Checks for shorts and leakages between all elements.—The Model, TD-55 provides a super sens tive method of checking for shorts and leakages up to 5 Megohine between any and all of the terminals

Elemental switches are numbered in either accordance with \$ M.A. Specifications. The 4 position fast schon anap switches are all numbered in exact accordance with the standard R.M. A numberngaystem Thus If theelement letmin-Complete ating in pin No 7 of a tube is under test button No 7 is used for that lest

with carry. ing case

695



A Combination

VOLT-OHM MILLIAMMETER

Plus Capacity, Reactance, Inductance and Decibel Measurements

D.C. VOLTS: 0 to 7.5/15, 75 | 150 | 780/1,500/7,500 Volts = A.C. VOLTS: 0 to 15/30/150/300 1,500 3,000 Volta # D.C. CURRENT: 0 to 1.5/ 15/150 Me. 6 to 1.5/15 Amperes + RESISTANCE: 0 to 1.600/100.000 Ohms 0 to 10 Megohma . CAPACITY: .001 to 1 Mid. 1 to 50 Mid. (Good-Bad heale for checking quality of electrolytic condensers.) REACTANCE: 50 to 2,500 Ohms, 2,500 Ohms to 2.5

Merches a INDUCTANCE. 15 to 7 Henries, 7 to 7,000

Benries • DECIMELS: -- \$ (q + 18, +14 to +38, +34 to +58.

Camplete with test leads .

State of the last 200 Made

CONDENSER BRIDGE

TE RESISTANCE BRIDGE

SIGNAL TESTER

√ CAPACITY BRIDGE BECTION — 4 Ranges; .00001 Mixtofared to .008 Microfarad, 000 Microfarad to .5 Microfarad, 1 Microfarad to 50 Microfereds, 20 Microfereds to 1000 Miccrotarade Will also measure the power factor of all sondensers from I to 1000 Microfarada.

✓ RESISTANCE BRIDGE SECTION —2 Ranges 100 ohms to 50,000 ohms, TY ANTENNA TESTER 10,000 ohms to 5 megohms.

✓ SIGNAL TRACER SECTION—With the use of the R P and A P Probes included with the Model 76, you can make stage gain mean-firements, locate signal loss in R P and Abdio stages, locates faulty stages, locate distortion and hum, etc.

VIV ANTENNA TRETER SECTION-Loss of sync., snow and instability are only a few of the faults which may be due to a break in the antenna, so why not check the TV antenna first? Locates a break in any TV antenna and measures the location of the break in fact from the act terminals.

Complete with MF, and A.F. probes and fast leads

stactory pay in easy, interest free monthly payments. See coupon below.

Try any of the instrutnents on this page for 10 days before you buy. If completely satisfied then send down payment and pay balance as indicated on coupon. No Interest or Finance Charges Added! If not completely satisfied return unit to us, no explanation nec-453527

MOSS ELECTRONIC DISTRIBUTING CO., INC. Dept. D-106, 2849 Tenth Ave., New York 14, N Y.

Picase send me the units checked I agree to pay down payment within 10 days and to pay the monthly balance as shown. It is understood there will be no finance or Interest charges added It is further understood that should I fall to make payment when due, the full un-Immediately due and pay-

Address

All prices net, F.O.B., WY C.

Model 14 ... Total Price \$26 95 \$6 95 within 10 days. Balance \$5.00 monthly for 6 months.

Model TD-85. Total Price \$26.95 \$6.95 within 10 days, Bajance \$5.00 monthly for 4 months,

Model 70 Total Price \$15 65 \$3 65 within 10 days, Balance \$4.00 monthly for 2 munths.

Model \$76-A. Total Price \$28.40 a7 40 within 10 days. Balance \$3.50 monthly for 5 months.





Complete set of pinter tenner loose and Air-Moral for Got Same top qualify equipment used by aspect machanges profrahere use them drap by them



Moint Analyzing Set contains Standard He Vacoum furt Fuma Te ter Remote Station Switch Madein Timing Se tah Light Standard Compres son fester Plus comgant carrying case & IN Tructions



quatify Suches W such with Fiftings Beat professional facts pon it mus during your sifetime carner in repair ing all types of engines. Nam foreign gars to bid diese votes

"I've worked alongside National Schools-trained mechanics," reports Sam Hanks, "They're tops, because they get all-around training, and they know how to repair fast and right the first time. No wonder National Schools graduates command top pay "

Earn as you learn men! We'll show you how, Streamlined lessons, diagrams, manuals, latest equipment, practical methods prepare you for hundreds of jobs in acores of industries. Free Placement Assistance.



Resident Training at Los Angeles If you wish to take your Auto-Diesel training in our famous Resident School at Los Angeles, theck special box in coupon for full information

NATIONAL SCHOOLS

Les Angeles 37, California

4	SECHNICAL TRACE TRAINING SINCE 1905 100 ANGELES 27, CALIFORNIA	0
1	NATIONAL SCHOOLS, Dept DC-127 MAIL NOW TO	7
-	OS ANGELES 37, CALIF and for FRIE Auto Overall Opportunity Book and Sample Lessen	A
ADDR	ESS AGE	1
	ZONESTATE_ eth if interested BNLY is Resident School Training of Las Angeles WS Give date of discharge	6



FREE BOOK You PREE, hauntiful atrange withhile Book, telling all about Tanjulerny Contains over 100 heaviful game pictures. And It's recur FREE, if you rush your request for the record to the record 2812 Elwood Bidg., Omaka 2, Nob. H. W. SCHOOL OF TAXIDERMY.

REFLECTING TELESCOPE

FAMOUS MT. PALOMAR TYPE

40 A 120 Power-An Unreual Buy!

Assembled—ready to usel You I see the Rings of Saigra functions (. and Mars hage cravers on Moun Star I "users Mouns of Jupiter A am of seet and over atred 3" diameter high-rised I to more Out on Finder legisled Signify, hardwood purished from Order by Sinch No — Sent thech up M.O.—Money back guarantee? PRAS Start hardware Einch No. \$29.501.0.6.

Write for FREE Catalog N Burrington, N. J. EDMUND SCIENTIFIC CO., Borrington, N. J., U. S. A.

MONEY IN PHOTOGRAPHY

mak to the rare hab to the bill to cannot see that you in obstocraphy, high mak to the career job to any high method trains you of the rare wife Till to bill to career see that the training the total to the training to the

Don't S. 10 West 31 Street, New York I, New York - 48th YEAR

"I Made 514,839 in 1 Year SERVICING RADIATORS!


Are you care no under the tent a year? Hundreds more making the note that time is 5 time a year in the note of the latent of the

INLAND MES. CO., Dapt. PS-12, 1100 Jackson St., Omehe 2, Nobr.

PATS UIDI SEND FOR FREE, BIG, BLUS-TRATED CATALOG MOW! anadquies report this a sufferior of theorem Start and rule your own business unitarity Man wanter of a agre-mant to by Charle cubers Spen Property Management Land and to Mowe, or a class Porms in lead on a set Inhitial awarded n class TODAY for free book No of do on-Approved for World War II and Rorean Veterana.



WEAVER SCHOOL OF REAL ESTATE EN 1038) 20206 Grand Avn. Marrant City, Me.

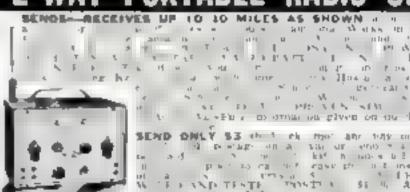

ESTERN PAGES

TRAIN FOR GOOD PAY IN A FIELD THAT ISN'T CROWDED!



Don't drift into a rust from t train for consenting that everyboxy and life brocker are acted to a terminal bears and the training that the east of circuit motors like the east of circuit motors like the east of circuit motors in photographs recorders of attender refrigurators are against fair rische, tolvers closuett are contributed for the east from trioners are the east from the east trioners are the east trioners are the east trioners are the east trioners are the east trioners and the east trioners are the east trioners.

FREE STUDY GUIDE

A unique Study Ouide booklet of 800 practical motor study questions—priced and sold separately at 25c—is yours FREE with your request to examine ELECTRIO MOTOR REPAIR book. Makes learning easier—apseds up the work!

LEARN FAST . . . no lessons to woit for! EARN WHILE YOU LEARN

Practice by repairing motors for friends, neighbors or nearby business houses. Earn while you learn this profitable, fast-growing business.

If sold as a course and sent to you in lesson form, you d regard ELECTRIC MOTOR REPAIR as a bargain at 10 times the price' instead you get it all at once-for only \$6.95. You learn fast and right. Here are just a few of the motor types that are fully covered.



Split-Phase Motors
Capacitor Maters
Repulsion type Motors
Palyphase Motors
Alternating-Current Motor Controls
Direct-Current Armature Winding
Direct-Current Motors
Direct-Current Motor Controls
Universal, Shaded-pole, and fan Motors
O-C Generators, Synchronous
Motors and Generators
Electronic Motor Controls, etc.

COVERS EVERY MOTOR TYPE IN COMMON USE

Every day, more and more electric motors and motor control systems are being used BOTH in industry and in home appliances. The expert who can keep them working property of a valuable man in this Electrical Age. The pay is good. The field is tremendous--and growing rapidly. Trained men find opportunities everywhere for full or part time work. ELECTRIC MOTOR REPAIR, the big 560-page training course book teathes you step by ship-quickly and easily—at home in spare time. There is no other book like it. Idea, for beginners or for actual bench use in busy shops. OVER 100,000 COPIES already in use in leading vocational schools, shops, and for home study.

SHOWS YOU HOW . . . Every Step of the Way!

ed on what you can learn quickly Duo-Spiral Burding divid-

Based on what you can learn quickly at home from ELECTRIC MOTOR RE-PAIR you can train for prompt, profitable installation, servicing repairing and complete rewinding of practically any motor in vie today

Any motor in use today
You learn fast' You learn right'
Every subject is clearly explained by
text AND ALSO by more than 900 (Lustrations and diagrams You not only
read what to do you SEE how it is
done Quick reference guides tell you
how to handle specific jobs When a certain motor comes in for repairs just
look it so REECTRIC MOTOR

look it up ELECTRIC MOTOR
REPAIR tells you what to do
- and excit how to do it
ELECTRIC MOTOR REPAIR is designed for use right
at the service beach. Unique

Duo-Spiral Burding divides the book into two sections so that both test and related disgrams can be viewed together An instructor standing by your side could hardly do better.

I Lt. Tick MUTTIL HEIVIE covers the

Fig. This MOTHE HEPAIR covers the cover the cover their from a term tog and dares outer to the period of the charges and resell from electronic control resistant is glat lown the line if expanse than it amounts the lambatic transfer is another than the lambatic transfer.



0.00	BC 100	managers and dellar	A CONTRACTOR STATE	1004
UEFF	P3-137.	MAILURE LIVER I	& COMPANY,	178%
222 B		Ava., Maw	Yark 18, 8, 1	Y -

Send 560 page RLECTRH MOTOR REPAIR book for 10 day FREE ENAMINATION I will then either return book promptly or send \$6 % (p us makings) in full payment I telled \$12 K Study finish which is turne to keep whether (u) book or pot (Send making) with order and we pay puttings. Same 10-day return previlege with manay releaded.)

Same -	
Address	
City. Zone State	

(Outside U.S.A. 37 43 cosh only-come 10-day rature printlega)

Inventors

If you consider your invention valuable, take these necessary preliminary steps promptly to protect it by applying for a United States patent.

Sketch and describe your invention. (For convenience in starting action on your invention, use "Evidence of Invention" form offered below.)

Sign, date and have this invention disclosure witnessed by two people capable of understanding your invention.

Have us make a preliminary search among U. S. patents already granted for similar types of invention. We then prepare a report for you on the probable patentability of your invention and recommend your further course of action.

This firm is registered to practice before the U. S. Patent Office. We are available to assist you in the preparation and prosecution of your application for patent.

We shall be glad to send you premptly and without obligation, an instructive booklet—"Petent Protection for Inventors"—and our convenient "Evidence of Invention" form.

EVANS & Co. Malin M. Evans

STOISTERED PATENT ATTORNEY
340-P MERLIN BUILDING, WASHINGTON &, B. C.

INVENTORS

PROTECT YOUR INVENTION BY A U. S. PATENT. SEND FOR FREE "INVENTION RECORD" FORM AND "PATENT INFORMATION EVERY INVENTOR SHOULD HAVE".

REGISTERED PATENT ATTORNEY

WOOLWORTH BLDG., 34th FLOOR, 1270 NEW YORK CITY



NVENTORS

U. 5. Potents protect your inventions. Our free book of "Instructions on Potent Procedure for Inventors," also "Certificate of Invention" form sent without obligation.

C. A. SNOW & CO.

REGISTERED PATENT ATTORNEYS
426 SNOW BUILDING WASHINGTON 1, D. C.

IIN.V.E: N.T.O:R:S

PATENT INFORMATION

GUSTAVE MILLER
127 ME WARNER BUILDING
WASHINGTON 4, D.C.

ATTORNEY
ASSOCIATE EXAMINER
U.S. PAT. OFF. 1922-1929

Patent Attender & Advisor S. S. NAVY DEPT. 1930-1847 PATENT LAWYER

INVENTORS

Whether an invention is patentable can be substantially determined by a search of the U. S. Patent records. Without obligation, write for information explaining the steps you should take to secure a patent.

JOHN N. RANDOLPH

Registered Patent Attorney

205 Columbian Building

Washington 1, D. C.

ENGINEERING

DEGREE IN 27 MONTHS

B.S. DEGREE IN

AERONAUTICAL, CHEMICAL, CIVIL, ELECTRICAL, MECHAN-ICAL and ELECTRONIC ENGINEERING (Inc. Endip and TV)

Also D S DECREE, in 16 mm. In Ma hematics, Chemistry Physics discussions, Nuclear Physics. Engineering Science preparatory courses Thorough practical program Individualized instruction emphasisted, Sovernment approved for U. I. a.

Keeping pece with progress in science and engineering

Spartous campus 20 but along derectories, gymnasium Playing field Modern well equipped laboratories including new physics lab and whol tunned how to lost New terms start quarterly Ester December March Janu. September Big demand for graduates. Studenta from 48 stares and 40 foreign countries. Many corn a major part of their colorge expenses in this large industrial center. Some coupon for free catalog and full information. Entered now!

4445 A 4 A 4	TECHNICAL	
	TECHNICAL	POSTLEPE
	1 4 F L. M MIII. A.I	
	, iranindalr	VVLLLUL

6127 E. Washington Boulevan	, Fort Wayne 2, Indiana
Precise send me free Information of Aeronautical (Chemical (# 27 Ma. B.S. DEGREES Inc.
Mechanical on 36 MONTH \$.S. DEGREES in:	Civil Electrical
Mathematics Chemistry	☐ Physica ☐

Nome

30 POPULAR SCIENCE

RCA offers you the

finest training

at home in

Radio-TV

electronics,

TV servicing,

Color TV





SEND FOR THIS FREE

BOOK NOW!



RCA INSTITUTES, INC.

A SERVICE OF RADIO CORPORATION of AMERICA 350 WEST POURTH STREET, NEW YORK M, M.Y.

In Canada—RCA Victor Company, Ltd. 5001 Cate de Liesse Rd , Montreal 9, Que. Pay-as-you-learn. You need pay for only one study group at a time. Practical work with very first lesson. All text material and equipment is yours to keep. Courses for the beginner and advanced student.

RCA Institutes, Inc., Home Study Dept. PS: 127 350 West Fourth Street, New York 14, N. Y. Without obligation, send me FREE 52 page CATALOG on Home Study Courses in Rod o, Television and Color TV. No Salesman with call.			
None	Please Fr nt		
Address			
City	Zone. St; to.		
KOREAN VETSI Enter discharge date.			
To save time, paste coupon on postcard			

DRAFTSMI



CASH BIG PAY CHECKS!

Train Now for more success, greater security

LEARN AT HOME IN SPARE TIME (or at college in Chicago)

Check the want ads in any newspaper—SEE the bigpay opportunities open to you as a draftsman. What's more, you can learn this well-paid, prestige profession at home—quickly east v. No special talent needed. Get complete, step-by-step Chicago Tech lessons in the mail, spend a few pleasant hours studying each week. In a short time you'll be a well-trained draftsman, ready to take your pick of many good jobs. Act now!



FREE INFORMATION MAIL COUPON TOBAT!
Get FREE TRIAL LESSON plus information about C T C, practical training. Learn what successful Chicago Tech graduates my about high pay and oppor-tunities in drafting. No charge, or obli-

CHICAGO TECHNICAL COLLEGE

5 225 Tech Bldg., 2000 Se. Michigan Ave. Chicago 16, Illimois Mail me Park I sam with information about his opportunition in DPAPT G

Address

NEW! CLIPPER SHIP MODEL KIT!

Flying Cloud, queen of clipper fleet. 21 contoured sails, rigging, long boats Precision plas-tic parts, cement, plans 1434". For catalog send 10c to Dept DS 4223 Glencoe, Venice, Casif.

> wherever hobby kits





GOOD YEAR GOODS I PROBLEM A OTHERS. WORN SURPRISE I PERSONS A OTHERS. WORN SURPRISE I PERSONS FAST BOY defective tire frt. EKCL.

School Busses. Mesotials & Charches use our EXTRA MILE-AGE TOP GRADE TIMES, Written Golden Rule Quarantee sent.

may deduct 20% every Park T.h.

ALSO ALL SIZE NEW A USED TRACTOR FARM TIRES

If you buy 2 or more Passenger 4 Ply tires, we give GNE tire FREE on each order Does not in-clude Truck Snow or White Wall tires,

WALLS SI DO EXTRA-12 MONTH GUARANTEE 600 16 \$5 65)640 15 \$5 42 700 15 . \$8 6. 750 20 600 16 6 5 670 15 5 42 700 17 10 70 N25 20 650 16 5 87 7.0 15 5 42 50 17 11 07 970 20 650 16 7 1 760 15 5 72 750 16 9 52 1000 20 700 16 6 42 600 15 6 2 (50 20 10 52 1500 20 750 14 10 5 8.0 .5 6 7 00 20 11 12 900 16M). 19 22 विदेशित विश्वती विभूगाउँका 9 65 any car

GENU NE STANDARD BRAND FACTORY ADJUSTED TIRES


Suburbanite and

GHAR, 8.80 ANY SIZE Blatt Name 18 Mm Guer Tires 42 yrs.

W W SI, ca.

MARVIN BLATT
Pleta I personally be a st only butter depended on it



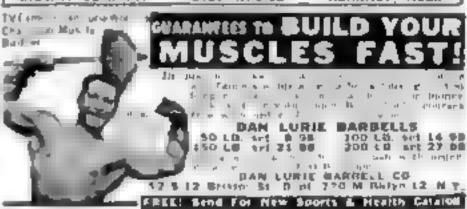



make your own Gem4 The Gem Maker comes complete with all the security equipment in luding a super charged diamond blade for sawing and all the wheels for gradus chapter and pulse by also amplete instruction. The complete equipment as shown, less motor and best for only \$14 to, fob. Burtlagies, Wiscoham Write to-

day for information and illera-


BEL MANWACTURING CO., Dept. S. Burtington, Wis. &

with a Foley Saw Filer

Here is the true story of Leslie Patrick—as told by his wife. "I can truthfully say Mr. Patrick made a wonderful investment FOLEY MFG. CO. with his Foley Saw Filer, In 1946, we had only a Model A Menneapolis 18, Mice. Pickup and all our belongings were in it. Since then, my Send Free Book hysband has done so well with his Foley Saw Filing Muchine and repair shop that we bought a house and pard for it, - MONEY bought a new car and built an addition to our house. MAKING and he has got a lot of new machines in the shop. FACTS * Nicest of all, it is all paid for."

Make up to \$3 or \$5 an hour

With the Foley Automatic Saw Filer you can sharpen hand, band, and circular saws just like new. Start in spare time, in your garage or base-ment. No experience needed Build up a steady, repeat CASH business which will buy YOU a home or new car. Send coupon for FREE BOOK, No salesman will call.

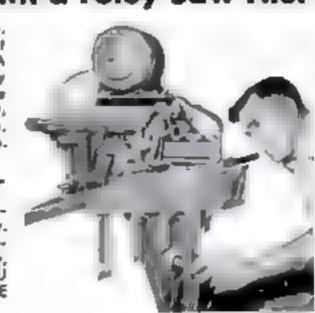

Name



Beautifying buildings by Colorcrate is a business apportunity awaiting mon of modest capital averywhere. Owners of homes, theres, motols, schools - simest eay type of construction-ere fanking for means to give lifetime eye-appeal to drab or dirty concrete, stucco and similar mosonry surfaces. Coforcrators can do such jobs, in little time and at little cost, and packet generous profile Colorcrate is a comentitious material, opplied by air pressure. Taugh, tenacious, andering, 30 colors. Investigate this law-investment enforprise by writing for the Opportunity Book

COLORCRETE INDUSTRIES, INC. 572 Ottowa Ave., Holland, Mich.

your bust can scure how to make the modes of cust my think and he prefer plantes took and a light near metals. NO EXPERIENCE YERY LITTLE CAPITAL NEEDED

Everv Mason

Masonic books for Blue Lodge Chapter, Commandery, Scottish Rite and Shrine. Our Alfants Are Used the World Over Send for free catalog for Masons, Odd Fellows, Knights of Pythus, Knights of Columbus, etc.

EZRA A. COOK PUBLICATIONS, INC.

P. O. Box 796


36D

Chicago 90, III.



WRITE FOR FREE BOOKLET, "FUN IN THE DARKROOM."

CHARLES SEBELER CO. 114 South 18th Street, East Orange, N. J. Please send me PHEE booklet. Fun in the Darkroom." Address. City Zone State

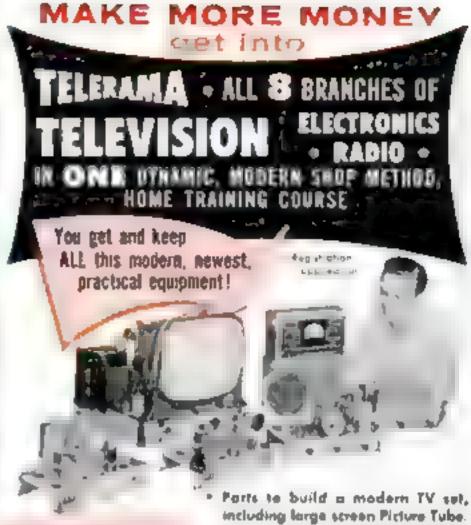

YOU COVER ALL R BRANCHES IN ONE MASTEN COURSE, ONE LOW TUITION


- Tuloristaninclesing optor TT
- 2 Rody Pin & Ado
- 3 trabustment alluctramies
- 4. Sound recurring and 16. Bully bity
- Proportion for FCC Unonce
- & Automotion
- 7 Redor & Series
- Communications

- Parts to build a powerful Superhet Receiver standard broadcast and short wave
- · Parts to conduct many experiments and build - . Continuity Checker * RF Oscillator * TV Circuits * Audin Oscillator * TRF Receiver * Signal Generater
- Professional Multitester
- A MUST for all technicions

FOR MEN WHO WANT TO CARN MORE MONEY! Amother great advance in Home Study Training Les National Schools, of Los Angeles, a practical Technical Resident

Trade School for over 50 years, train you at home by Shop-Method, for today's unlimited opportunities in ALL # BRANCHES of the Television, Electronics, Radio industry

YOU DO MANY PRACTICAL JOBS - including servicing, circuit analyeas. Build a modern TV art from ground up, with equipment lets we send you, including a new large-screen picture tube and professional Multitester, at no additional charge. You receive an experiment lesson with each kit. EARN AS YOU LEARN. Graduate Employment Service.

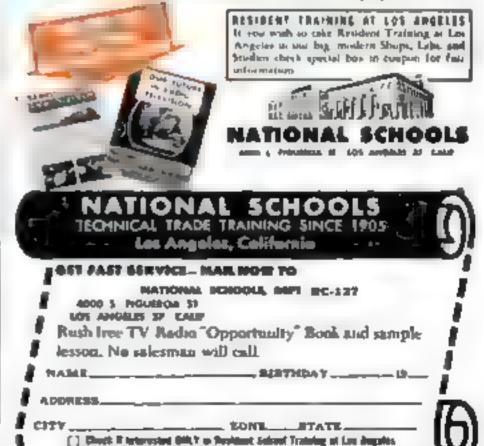

TETERANS Give date of descharge.

MEN PAST 40

Afflicted With Getting Up Nights, Pains in Back, Hips, Legs, Nervousness, Tiredness.

If you are a victim of the above symptoms, the trouble may be due to Glandular Dysfunction. A constitutional Disease for which it is futile for sufferers to try to treat themselves at home. Medicines that give temporary relief

will not remove the cause of your trouble.

Most men, if treatment is taken before malignancy has developed, can be successfully NON-SURGICALLY treated for Glandular Dysfunction. If the condition is aggravated by lack of treatment, surgery may be the only chance.

· NON-SURGICAL TREATMENTS

The NON-SURGICAL treatments afforded at the Excelsior Institute are the result of 20 years research by scientific Technologists and Competent Doctors.

The War brought many new techniques and drugs. These added to the research already accomplished has produced a new type of treatment that is proving of great benefit to man as he advances in years

The Excelsion Institute is devoted particularly to the treatment of diseases of men of advancing years. Men from all walks of life and from over 3,000 cities and towns have been successfully treated. They found soothing and comforting relief and a new health in life.

EXAMINATION AT LOW COST

big saving in expense.

On your arrival here, our Doctors who are experienced specialists, make a com-plete examination Your condition is frankly explained to you with the cost of treatment you need. Your decision is then made. Treatments are so mild that hospitalization is not necessary-a

RECTAL COLON

Are often estooluled with Ginneuler Dystunction. We can treat these for you at the same

The Excelsion Institute has published a New FREE Book that deals with Diseases prove of utmost importance to your future life.

Write today, No obligation.

Excelsior Institute Dept. B575 Excelsior Springs, Mo.

Gentlemen: Kindly send me at once your New FREE Book on Diseases peculiar to men. I

am....years oid.

Name....

Address.....

ANYONE WHO UNDERSTANDS SIMPLE 7TH GRADI ABITHMETIC CAN USE THIS STANDARD SLIDE RULE! Be modern—use this quick easy way of figuring. For business man students carpenters machinals salesmen printers and angravers office workers farmers, metrhapia ()me kerpers plumbers electrievanse-everyone who does figuring the save time and tabor with this side rule


Utsetrated Instruction book shows you how to get correst aneserve instantly without pone i and paper (You get 191279) at de cute and the testing book for only the protoned Saturdaction guaranteed or refund

Methan-Mail Co., 210 S. Climton Dopt. SMT-1, Chicago S

World's debut thrilling bobby - successful

Tollers Groom Every Rumban

Marido med the state of Successful home grower successful home grower after computer to the successful home Tells how a start backs as senderative are and considily could grow the legal to start backs as senderative are and considily could grow the legal to start backs as a fine we be successful to the sender to start be sended to grow the legal to successful the sender to the

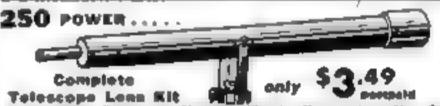

Conquer Space, Explore the Uniter the Planets, Moon craices. New States, etc. Complete Lennis, commissed to pet treat length ground and pet shed shorters as a representance for an receiver to the France to the Powers and Provers to the State of the Sta

BUSSE SALES CO., Hartford, Conn., Dept. PS-62



HYDRAULIC JACK REPAIRS

form While You Learn at Home

Milions of lacks in the A suto service stations, the kers body shops rivings, factories faring need agreeing we show you hiow easy step by step drives there are what tools to use MAI(N I'T TO 35 an lower to space time in your own hasement or warge fact your own business NOW Write for the No. C4 by A tree bonus offer

Institute of Hydraulic Jack Repair

P.G. Bex 50, Bloomfield, N. J.

Thriff he Bringing a Crock la Justica Through Scientific CRIME DETECTIONS

We have mucht thousands this exciting profitable, pleasant profession Let us taken you tee, in arms ours heree Learn Physics Printing, Pleasant Identification Police Photography and Criminal Invastigation thoroughly, quickly and at small cost.

DESTITUTE OF APPLIED SCIENCE

Y	TO Secure	de Arris, 1	March 130	(9 Chicago	40, IL
	mer and me	free "Bin	Book of 0	Cirlame**	
100	- treet				

34 POPULAR SCIENCE

OUR LOWEST PRICE EVER!



Automatic Pistol

Why Pay up to **\$12.95**3

Use this ,22 cal Berman 8-shot repeater for fun, sporth, profection against prewers. Fires barmines blanks but WMAM! What a go as Enough to frighten the daylights out of any character hundreds of feet away exact dimensions, finish & design of the real McCoy, Pracision-made in finest traditions of German guncraft Fully automatic. Lafety catch post-electing tips. Thousands the government of the real McCoy, Pracision-made guncraft Fully automatic. Lafety catch post-electing tips. Thousands the government of the real finish & design of the real McCoy, Pracision-made agreed the professional for ground free delivery (Sorry, no CDD's at this low price) fails of CDD's at this low price).

FIX OUTBOARD MO

POWERMOWERS, AND ALL SMALL 2 & 4-CYCLE GASOLINE

Repair your own equipment or MAKE EXTRA MONEY in this growing field Pully illustrated, easy-to-understand. Home Study Course, Write for PREE information.

LINCOLN TECHNICAL INSTITUTE SUITE 12-G, 472 MARKET STREET, NEWARK S, N. J.

PHOLSTER YOU RE IN BUSINESS RIGHT OFF-

complete uphobiterer's tools materials, frames, all you need to earn while you learn AT HOME. Expert N Y State approved training in upholstery, slip covers, etc. Big Opportunity Fie d Send for FREE litust. Catalog, FREE Sample Lesson. Write Today. Approved for Vets.

Upholstery Trades School, Dept. FX-1612, F21 Bengdway, New York 3, N.Y.



Be Popular Entertain Amaze

Learn to apply Hypnotiam and Autosuggestion in short time by training at home Write to America's ordest, most famous Hypnotic School for free information new today DON'T DELAY Satisfaction of proces refunded. Sent in plate wrapper.

SCHOOL OF APPLIED HYPHOLOGY Dopl. 212 120 Central Park South N. Y. 19, N. Y.

h School Muny Finish in 2 Years

If you did not or cannot finish high school, here is your opportunity Study in spare time at home. Go as rapidly as your time and abilities permit. Course equivalent to residential school—prepares for college exams. Standard texts supplied. Credit for subjects aiready completed. Single subjects if desired. Diploma awarded. Be a High School graduate. Start studies now, Free Bulletin. Write today.

AMERICAN SCHOOL, Dept. H946

Drexel at 58th, Chicago 37, Illinois

Your choice of school is highly important to your career in



INDUSTRIAL **ELECTRONICS**



RADIO-TELEVISION



ELECTRONICS COMMUNICATIONS

Become an ELECTRICAL ENGINEER or an ENGINEERING TECHNICIAN at

MSOE in Milwaukee

Choose from courses in:

ELECTRICAL ENGINEERING

Backelor of Science degree in 36 months. Communications or Electrical Power option.

ENGINEERING TECHNOLOGY

Assoc, in Applied Science degree — in 18 months.

Electronics Communications Electrical Power, or Computers.

MSOE — located in Milwaukes, one of America's largest industrial centers — is a national leader in electronics instruction - with complete facilities, including the latest laboratory equipment, visual aid theater, amateur radio transmitter offers 93 subjects in electrical engineering, electronics, radio, television, electrical power, and electricity.

Advisory committee of leading industrialists. Courses approved for veterans. Over 50,000 former students. Excellent placement record.

Previous educational, practical, and military experience evaluated for advanced credit.



City

TERMS OPEN SEPTEMBER, JANUARY, MARCH, JULY Write today! Choose sciecty—your future depends on tt.

SCHOOL OF ENGINEERING

Dept. PS-1257, 1025 N. Milwovkee St. Milwoukee 1, Wisconsin

Send FREE cureer booklets.

(Piease print)

_State

I am interested in...

(Name of course) Name

Address

Elizible for veterati's educational benefits? Yes

Zone ___

No





ACT NOW! FREE-

- · Music Stand
- Hame Study Course . Delgag Case
- e Lifetime Guarantee

MONEY BACK GUARAN

Buy direct from world's largest dealer, Save 50% or more. 20 newest models to choose from. Extra bonus gifts if you buy now. Saturaction guaranteed or money buck. Trade-ins accepted Low down payment; pay little as \$10 00 a month. Try before you buy on FIVE DAY TRIAL, Rush coupon now for FREE color catalog and wholesale price list, Write TODAY. Accordion Manufacturers and Wholesalers Outlet, Best. 7 177 2003 W. Chicago Ava., Chicago 22 M.

Accordion Manufacturers & Wholesalers Outlet 2003 W. Chicago Ave., Dopt. F (27 Chicago 32, III. Send FREE Color Catalog and price list.

ADDRESS...

STATE CONTRACTOR OF THE PROPERTY OF THE PROPER



IN ELECTRIC APPLIANCE REPAIR

Mechanicany Inclined men wanted. Earn white team no in apare time at home Start your own to I have time blanchess repetition refiniterators. Grantes Irons and becomes repetition refiniterators for scores factories etc. New shop method bonte tra hing system Exercions to your prespect FILES SOOK goves full facts. Hittery Transparent FILES SOOK goves full facts. Hittery Transparent FILES SOOK goves full facts.



Simplefied home study training program. Learn

every phase of Mackine Drofting and Tool Designap up to a better jab-big-pay. Use spare hours-no interference with present work. Diploma awarded, Low Tuition

American Technical Society Japt P5-1257, BSO E. 58th St Chicago 37, 111,

Please send me your FREE BROCHCRE and full details about Machine Braftsman and Too) Designer training program.

1 + 11 + ++

Address



IMPROVED LAWH MOWER SHARPENER KNIFE GRINDER -

Sparpen year momen in 10 to 20 minuies Hand- Power Part to Rivery Modern da Mar life will say their in one Practice Bed An e Jup ein and a fre dun Reel Conners Er a Red Bade Content of Abra of Prince essay Men hone 17560 makes from He in the part Tue & Led net a tiple t o Tee a 25 P. 11-17 lawn this ear. To be in or the market for less Company We elsa Marie Fir uside ley' in He we Burng and for Free Brochuse No. 11 S.N.




MODERN MANUFACTURING GO. 🗤 160 Busie Pair Outs Ave, Pasadone, California -

LEARN LOCKSMITHING

been festival of profitable trade from experim to apare time at nome! Age or physical handless on disable acting Year around, attention that I will be part time Practical II untrated treatms. Make money even white learning! All materials and special tools supplied From Booklet.

Lociumithing Institute, Bopt. P2-94 150 PARK AVENUE E. RUTHERFORD, M. J. Lie, by N J State Board of Ed. Approved for Veta



JSM PRODUCTS CO.

1 TE CASTILTON ID DOFT 71 CITYLIAND 7 OF O

12 yet

STUDY TO BE A DOCTOR of Psychology or Metaphysics

Obtain a Po.D. Ma D. or Ph D. Be g Tenrary, Lecturer or Accredited Practitioner Track others for to achieve Health Hanp new and Contentment Chartered by State. Correspondence contrain only Write for FILES. bank felling here.

THE NEOTARIAN FELLOWSHIP

Desk 3, Pickwick Building

Kables City & Missourt

YOUR OWN L RADIO TUBES for filoment breaks

all of them—even picture tube Note to hast of TV service on a new due to defect or financials. Tester chieve if financials are good laured table in tester. Light shows if table is burned out Easy safe. One service can saved pays for leader. Meint case. At or (M. Checha facts, appliances ele Doly S. M. prd net (M. D. plan charges, Deland Madel M. E., Instructions, Casembred, Griber Engineering Conp., 1718 West Lawrence Avenue.

Dept. SC-104 Chicago 25, 18,

ONE MILLION DOLLARS CASH

Yours only \$2.98


the a stern booth militoraire! Have money to both! We'll send you exacts one of item backs in bonest to goodness Confederate atoney—and all you pay to \$2.90! You can do everything with this money but spend it. Amore and attude your cutton-pickin trients, Win but both by the barrel! Light your cigars and cigarettes with \$10.00 bolls! Live it up' It's a militon dollars worth of laught and ham—all for only \$2.90.

The get one militon backs in \$10 s. \$20 s. \$30 s. \$100 s etc. decom. Latient—enough to keep your friends laughing and happy for mornis—This prior is limited. Only \$4 militon dollars to a cantoner. Our supply of this toot is limited—so rush your order. One Militon dollars only \$2.90. Four Militon beliars only \$10.00. If not delighted keep \$100.00 for your trouble and return the rest of the money for a full and prompt refund, find to —MEET VALUES CO., Dept. M-188, 403 Market St., Newark, N.A.



Never before a precision reflecting topescope sold with all these features for anywhere near this now price Processional observations guiranteed with his powerful astronomical te escope. Francisco with ture at Wills ANOIS. John for observing earliers where the person is to prove the better a rings July ter Mann a deal, other er estate observed with observatory clearness anost by the superculard on all objects. Will 'spitt' clearness anost by the superculard on all objects. Will 'spitt' clear double stars for a mind by an ports. Obtically a second for y correct for sections astronomical work (other completely assert had rightly to use that me give full range of passers at X 1.1 X 130X 160X 3 took fit 2 an over- a temporary and a start both but the burnels for use the latest and a climater. Special would also him to be to be the for use his literate a foot hardward folding triped E satural a turnath mount A quitour head compensates for earth a measure A permits automate racking of astronomical objects 36" Babelie phenolic lubus 4X finder sense sights targets fast immilies a permits sense instability removable from injust for easy storage & certain in remove 10. areas Asso in oded with this amazing percention narrament 270 page both Pandbuck of the Reavens. Magic Star Finder Salls fact on completely guaranteed or thopey refunded. Sent complete. nothing else to buy at the amazing law price of only \$24.95 Send cash check or maney order Shipped by express \$ 0.8 Bhipping weight 10 the

Dest. DPS 2, OFFIX INSTAUMENTS CO., MOFIMA Ave., MY 17, N.Y.

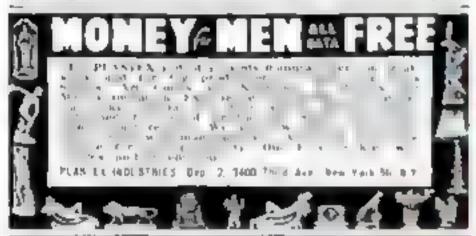



... Swiss or American

Unique Sweezey System eterts you making repairs right numy Develops your still stop-by step Teaches medican medicals prefessional short cuts. Laura by personal attendance or spare time home study. From Sample Lousen. He ships-tive Welle feday?

CHICAGO SCHOOL OF WATCHMAKING 2330 Mrtwauken, Dapt. 4127, Chrone 47, 111.

Famous SPEEDWRITING aborthand, 138 wards per minute. No symbols he marotnes: uses ABC's. English to learn, write and transcribe. Low cost. 350,000 graduates. For business and Civil Service. Typing available. 35th Year Schools in over 400 cit ed Write for FREE booklet to



NEED MONEY DO YOU

TO PAY FOR YOUR AERONAUTICAL ENGINEERING EDUCATION AND LIVING EXPENSES

while attending school in Colifornia?

NORTHROP INSTITUTE'S CO-OP Training Plan's the answer Write for complete details. No obligation. Also get free Horthrop Catalog describing TWO YEAR AERONAUTICAL ENGINEERING CURRICULUM Remember, there is a waiting list for Northrop Institute Graduates! Approved for Veterans. Send name address, age and veteran status.

MAIL TO: -----------

1157 W. Arbor Vitae Street, inglewood 1, Colif.

I WILL TRAIN YOU FOR ON MY EXCLUSIVE NO-OBLIGATION **NO-RISK TRAINING PLAN** Frank L Spraybulty.

Let me prove to you . . . without cost or obligation ... that I can propere you to be a Radio-Television Servicemen is 16 Months or Lass

Let the true facts speak for themselves! That's why I want you to have my big new cetalog and an actual Read, then make up your own mind! Train on my exclusive NO OBLIGATION PLAN . . . which means You pay for and accept your training as fast or as slowly as you wish. Prepare now for big paying jobs in Radio-TV or your own business. I will help you earn while you learn . . . in spare hours at home.



Get Practical Experience with 25 Kits of Radio-TV Parts

distail unail. OH PUBLISH

Practical experience counts most. In addition to modern lessons, you train with actual parts nad equipment Bulld the famous Sprayberry Training Television Set, Multi-Runge Tester, 2-Band Radio, other Test Equipment-all yours to

on Color TV, Transistors, Hi-Fi and UHF Conversions ... included to make your training more valuable.

You owe it to yourself to get all the facts ... Mail coupon for catalog and sample lesson - FREE

See for yourself . . . in actual pictures and descriptions . . . why Sprayberry Radio-Television Training offers more. Bucked by almost 25 years of training experience. Three training plans to suit your exact needs. Rush coupon today for hig new catalog and sample lesson. No obligation; no salesmen will call.

1517 Jarvic Ave., Dani, 55-W. Chicago, 20 III

	- Mail Coupon Today!
	SPRAYBERRY ACADEMY OF RADIO-TELEVISION 1512 Javis Ave., Bapt. 55-W. Choogs 26, III.
	Please rush catalog on your ALL-NEW Radio-Television Training Plans. I understand this does not obligate me and that no aglesman will call, include Sample Lesson FREE.
N	meAge
A C	dress
CI	yState

What Do 3 Out of 4 **Doctors Recommend** to Relieve Pain?

A survey shows 5 out of 4 doctors recommend the famous ingredients of Anacin Tablets to relieve pain of headache, neuritis and neuralgia. Here's why Anacin gives you better total effect in relieving pain than aspirin or any buffered aspirin:

- ACTS INSTANTLY: Anacin goes to work instantly. Brings fast rolled to source of your pain.
- MORE EFFECTIVEs Asserts to like a doctor's prescription. That is, Anacia contains not one but a combination of effective, medically proven in-
- SAFER: Assein simply out not upont your stomach.
- LESSENS TENSION: Anacles also reduces nervous tension, leaves you relaxed, feeling fine after pain goes, Buy Annels today.

Shrinks Hemorrhoids **New Way Without Surgery**

Science Finds Healing Substance That Relieves Pain—Shrinks Hemorrhoids

For the first time science has found a new healing substance with the astonishing ability to shrink hemorrhoids and to relieve pain-without surgery


In case after case, while gently relieving pain, actual reduction (shrinkage) took place.

Most amazing of all--results were so thorough that sufferers made autonishing statements like "Piles have ceased to be a problem!"

The secret is a new healing substance (Bio-Dyne*) -discovery of a world-famous research institute.

This substance is now available in suppository or ointment form under the name Preparation H. Ask for it at all drug counters -money back guarantee.

*Sec. U.S. Pat. Off.

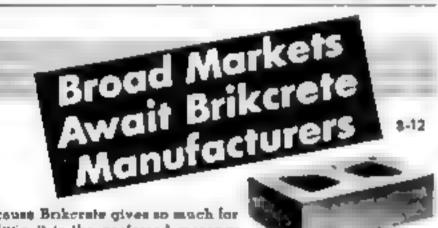

Because Bokernte gives so much for so lithe il is the preferred mesonry for homes, schools, motels-practi-

cally every kind of residential, commercial, and industrial construction. A lower-than-lumber selling price still permits 100% or more mark-up on basic production costs. And Brikerete hes quality appeal because it is outstanding in design, proportion and color. All the values that building owners and contractors are looking for. That's why market potentials are so broad.

More Local Plants Needed

As a local manufacturing opportunity, Brikerete has much to offer Local markets are supplied by local plants using local materials and labor. Savings in freight and distribution anable low selling priose, high income potentials. Plants operate in franchise-protected territories with exclusive privileges. And for men of modest capital, machinery is available on easy-topay lease arrangements. Write or wire for Brikgrete Book No. 2.

Brikerete Associates, Inc., 422 W. 25th, Helland, Mich.

\$1 BRINGS YOU \$

Discover Flok-Kruft and Earn \$\$\$\$\$ AT HOME

Earn up to \$15.00 per hour spars time, Amazing new Velvet. ther spray instantly makes any object (Lamps, Eadio & TV Cabinets Figurities, Signs, Auto dash boards, toys furniture drapeness—appeting) worth expens to \$6000 Prices the magic, you can spray anything with this beautiful new successing quick that fools like rich Velvet.

EARM UP TO \$300.00 PER WEEK SPARE TIME

Imagine materials cost only 3c per square foot, (Average TV or radio cabinet can be beautifully spraped with this startling new 3 dimensional Veryet finish in 15 minutes at a cost of only 3-te in materials. Your charge for this job is at least \$10.00 to

REPRESENTATIVES IN YOUR AREA URGENTLY MEEDED

Own your awa business. Work at home in your spare t ma Help it is the huge growing demand for this amazine new boast. full Velvet fluor finish. Orders come from stores offices homes, architects, auto designs evenwhere Possible \$20,000,000,000 worth of jobs to be done. Investigate today—be first in your

Actual samples in 16 Radiant Colors, Bookiet of 50 Home Business Opportunities and Contident of Retails all sent free! Write: Coast Industries, Les Augules 61, Calif., Dopt, A-12



covering kits, morine Offichate Crafter

Branghil Instituted. FPL₄ COLOR

TAFF MARINE WOODCRAFT Manhaupalis 21 Man Dept PS 1257 834 395 Avs N F



supplies.

Raild testing strongsh & health with Boutherp's fautous burbets -ets and instructions

130 LB. STANDARD SET \$18.25 FOR

Large selection of harholf sets, home trym equipment professions feely building the equipment dat type gym weights

SOUTHERN MARBELL MFG. CO. P.O. Bex 136 or Mapheshade Lane & Bounders Ave., Michmond, Vo.






aff the many uses for these prisms but we do know 1000's of Anding them useful & fun - how about you?



PRISMS \$1.50

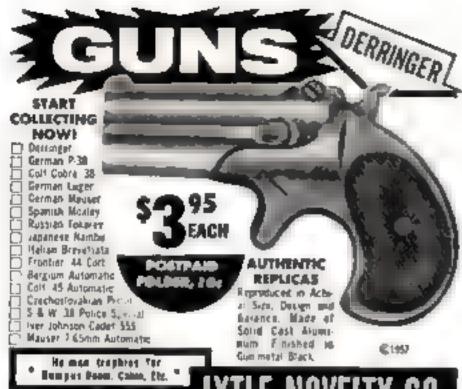

Sund Coth, Chech or M.O. No. C.O.B a. No Cassels Orders, Add 4% Sales Tex in California.

2656-5.2 Faction Avenue, Long Street 10, Cathern

MAKE BEGINNERS BIG PROFITS

Many men and women making hig money on imports by mail order from home. No incertment in merchandise or ads. We tell you where to get low cost products from shroad and supply list of magazines that run no-cost ads. Write for Free details MELLINGER CO. Dept. 0.24C, 1717 Westwood, Los Angeles 24, Calif.

STUDY AT HOME Legally trained men win higher postand public ofe. Greater opportunities now than ever before, More Ability: More Prestige: More Mency step by atep. Y of can train at home during spare time. Degree of Li. R. We furnish all test material including it ratures Law Library Law goal, may terms sie our testable haw Testaing for Leadership! and "Reidence backs Fift K Sand N W LABALLE EXTENSION UNIVERSITY 417 South Beatharn Street A Correspondence Institution Gopt 1283L Chicago 8 111.

SALE

20 x 50

##GDLARLT \$74 80

Shigh powered whaper weight 27 of the controlled between the transfer of the controlled by the controlled by the control of th

\$29 95 ST O BEN AD COLUMN CHF 4550 thi ago 2 ! DEALERS



FAMOUS MAKE RCA LICENSED FM-AM RADIO

Reg. Price \$130 to for Radio Alone Complete S59.95 BALE Price

Here is a complete H. Pidetate FA AM tradin made hy one of the rep majorate of a s. This set is fitted for custom data in thomas for suction data in thomas for suction of the set of the fitted by production. with crystal and magnetic phone inputs 1956 homing a 127 R A establish tange 2008L speaker See 12 57 32 a Amplifier Preside that and the control of the cont Provides Endless Hours of Static Free and Drift-Free FM Listening Pleasure



Repared

t. Tunes At 88 12 VT. 68 V6. 6AL, 174 V. 6At 6 5507

ADES 1884 A. SYN A 1981 Director 15 VT VF FOUR REPORTS

At 6 1884 A. SYN A 1981 Director 15 VT VF FOUR REPORTS

At 6 1884 A. SYN A 1981 Director 15 VT VF FOUR REPORTS

At 6 1884 A. Syn A 1981 Director 16 VT VT VE VT VT VE V

Phan carry

30 North Van Brunt St., Englawood, N.J., LO 8-1264—Heat to Plaza Thomby 👍

MECHANICS IN DEMAND



Lourn to even big pay in DIESE, in our large modern equipped Chicogo school and they. He previous experience er tipining necessory. We belp you find in ng quartois and part tema jab white in school. Camplete, pintfirel. courses taught in the fallowing trudes, under the super essent of experienced, expert technicions.

APPROVED FOR CIVILIANS OR GI'S -CHOOSE YOUR TRADE-WEEKS CHECK HERE 20 DIESEL MECHANICS **AUTO MECHANICS** 20 BODY & FENDER GAS-ARC WELDING

PETRIGERATION AIR CONDITIONING MACHINIST TRADE 30 ADVANCED MACHINIST

(Includes tool & die) 33

36 PIANO TUNING & REPAIR

FREE JOB PLACEMENT SERVICE DURING AND AFTER TRAINING

ENGINEERING

DIESEL AUTOMOTIVE ENGINEERING REFRIGERATION & AIR COND.

.. 27 marths

ENGINEEPING WELDING ENGINEERING EARTH MOVING EQUIPMENT

18 months 16 manths

OPERATORS TRAINING

war er eer a to Green by checking your interest. e d was compon for complete information as " ga 10%

NAME

STREET

IOWN.

ZONE STATE

Established 1902

SHOP TRAINING

Box L. 2238 S. Michigan Ave. Chicago 16, Illinois

Just Pick the Kind of Body YOU Want

CHECK THE COUPON BELOW

... Frava to Yourself How EASILY Yes Can Hove It ... Almost Overnighti

Just tell me, in coupon below the kind of body you want—and I'll give it to you SO FAST your friends will be amazed! "Dynamic Tension," my easy 15-min utes-a-day method, can make your chest and shoulders bulge . . . your arms and

legs surge with power. your whole

body feel 'alive'

FREE 32-page (livstrated Book

32 pages on both Protest C. Traceout changed for from 4 57 th weaking jobs. Wachi a Most Perfeetly Developed State and what is has done for others Stall coupen NOW Charles Atlas, Dapt. I M. 116 E. 23rd St., N. Y. City 10, N. Y.



CHARLES ATLAS, Dopt. 2-M. 116 East 23rd St., New York 16, N. Y

Dear Charles A las Dere - the Kind of Rody I Want (timerk as many as you dike

Bifmmer Water Stips Broader Chest, Shoulders More Weight Sould

" More Pewerful Arms, Grip Mora Pawerlut Lags Batter Energy Steep

Send me, abundancely FRSE, a roots of vote famous book show to be those of Phonomic Tension? For make me it new more of pages crapta e with past accepts, answers to say questions and variable advice. No of a gation,

Address	(Please Print or write plains)	100
Cltr	State	

I'll Send You This Handsome SAMPLE CASE-**FREE!**



Makeupto \$30[™] ina Day!

Your Own Tailored Suits

If you want to make more muney space time or full time, rough the nto the way a mark a epacked with 100 bean-

workers utners lake their chiers for the made to-measure cluthers and pocket B GCASH PROFITS in advance. No renerience no tailoring knowledge number and no money needed, even WESLPPLY EVERYTHING PRIE sample case sample sortings equipment, complete instruc-

Uso Sparo Evenings... Weekends... Make Meney... Get Suits!

It seasy to make money taking orders in just spare timelunch time evenings, weekends. When men see the fine fit, quality and value of our suits. TREY ORDER So we make It easy for you to get your own personal suits and overcoats without paying even one penny Don't wait' Rush coupon with your name address and age for FREE Sample Case

J. C. FIELD & SON, Dept.S 1720 Harrison & Throop Streets, Chicago 7, Rt.

J. C. FIELD	A SON,	Dept.	5-1720
Harrison & T	broop Sts.	. Chicag	o 7, ML

Please rush AHSOLUTELY FREE, the valuable Sample

tions money making plans and own sults without paying one of	details for getting my
Name	Ags
Address	
City	. State

THE MASONIC CASUALTY COMPANY



OFFERS

ACCIDENT-HEALTH-HOSPITALIZATION CHARTERED INSURANCE AT COST

No Medical Examination • No Paid Agents
• Coverage On or Off the Job With Committee or

FIRST 3 MONTHS PROTECTION FOR MEMBERSHIP FEE \$2.00

FOR MASONS ONLY under 56 yes, of ugo WRITE AT ONCE

THE MASONIC CASUALTY COMPANY DO BOYLSTON STREET Dopt. 5-127 BOSTON 16, MASS. NO AGENT WILL CALL

EN WANTED Week and was

Eurn \$100 Per AUTO DIESEL

PM-7-35 1 II tion on real positionent form white tes a Many of our disaducted porm per week and a

MECHANICS a cour core or esso y flow and make

NASHVILLÉ AUTO-DIESEL COLLEGE

226 7th Ave., N., Copt 41

Nucha Re 3, Tone.





ceaching mume FREE to graduates. Green trught by stall of C.P.A. instrument. G.I. APPROVED NATIONAL BUSINESS INSTITUTE

13th & "L" Str. Dugit, A. LINCOLN, NEBRASKA

FREE BOOK

Writing Advertisers When Please Mention Popular Science

New Isotronic Training Method LEARN TV REPAIR

IN ONE SHORT WE Now, after a year's research-a streamlined training system that obsoletes all others! In just 7 days you may earn \$150 weekly, without paying up to \$250 for training, studying long months! Developed by electronic acientists in cooperation with major TV mfr's., the new Isotronic method is the most practical ever devised' For conclusive proof, write for details and FREE SAMPLE LESSON. Use it on your own set or a friend's repair it - convince yourself you can make big money immediately in your own TV business!

Hurry - Free Lesson supply limited. Write: Electronic Engineering Co., Dopt. A 18C. 1038 So. La Bres. Los Angeles 19, Calif.

NOW IT'S

HERE'S YOUR CHANCE! No matter where you live . . . no matter what your present job is, you too can soon be cashing hig pay checks and enjoying an assured future in drafting' Never before has there been such a demand for trained draftsmen . . . the key men in all Industry. No profession has a brighter future! Draftsmen get top pay . . , are in line for promotion to executive positions.

NO EXPERIENCE NEEDED! Cleveland Engineering Institute Courses are the most modern, practical, thorough, drafting courses available. They are fully illustrated prepared especially for Home Study If you can read this nd, you can learn drafting under C E.L's guidance. Ours is a tested, proven, up-to-date course that has helped thousands of others on the road to success (many with only grammar erhool training).

EARN WHILE YOU LEARN! Keep your present job while learning drafting at home in your spare time at the speed that is best for YOU. Many students, as they advance, earn extra money by doing part-time drafting Many graduates earn more in a single

pleting the CE | course) became foreman , solary increased

Wm. Reichers

after taking WF C E I. course increased my stringy from \$350 to \$820 mor month

G. T Wiseman

week, as draftsmen, than the entire rost of the course.

FREE! After you graduate, 50 hours of extra training at the Institute in Cleveland, This post-graduate training

WE HELP YOU GET THAT JOB' After you have graduated, C.E.I, will help you find a position. Our Job-Finding-Service is the only one of its hind offereducy a Home Study School.

Thonks to C.E.I I Was promoted cheed at 4 other men with a good pay Increase. W K Anderson


job I got with C.E. [, 's ossistance has given me e real clart.

R Eisenbort

WHAT CAN DRAFTING OFFER YOU? Find out how a C E.L. DIPLO-MA can bring you a better life more security — the respect of your employer and people in your community. Without obligating yourself in any way, write for the Cleveland Engineering Institute Success Book and a Sample Lesson FREE. Industry needs men of action! This means YOU MAIL THE COUPON RIGHT NOW

PROFESSIONAL EQUIPMENT included at no extra costi VETERAN APPROVED

CLEVELAND ENGINEERING INSTITUTE

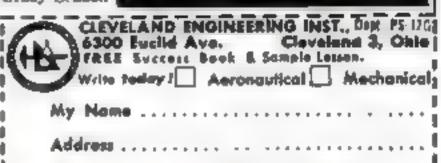

CityZone...State....

TRANSISTORIZED POCKET FM RADIO AND TUNER KIT



Fun for the goung-ter or the vet eran in the receiver of the telto-way rans at red (see the FM
costs until tappe with a range the
cost plets FM band to m EM to
(# # megory ries p as a regati
band from 'n to 145 megory tes The fusinette est cap to used to your ear bome or perket and treds to ablenta or we and wires there is ablentia or second wires a appetery does decreased that the processing the compact for each and targe with the second the experiment of the term of the each that the each target of target of the each target of the each target of targe to the a or or etely with easy toata Ibrara.

tomplete hit \$15.95 postpatel \$2.00 pt 12 Th Es piece with ear total, cord and total \$8.50 post

SPECIAL! 3MIELLII ALL-BAND RECEIVER COMPLETE XIT WITH HEADSET \$9 95 ppd



TWO-STAGE TRANSITOR AMPLIFIER OR PRE-AMP KIT

You can this a powerful two tage amounter or pre ample which and he need as a ob-engrach area for me. Therefore a creata set and as a precame or or at or matheric pick ups but a five component with two rates core a unity exercit with the first case with a stage of a many control with a stage or core of a many component with a stage or core of the many of a many component with a stage or core of the many or a stage of a many component with case or to now instruct on \$4.05 postpaid. Aibif. To season her in California


EKERADIO ELECTRONIC DEVELOPMENTS 850 N Fair Oaks Ave Panadens, Co

Do Your Work Easily with PROTO's New, Improved Flat Wrenches

PROTO Flat Wrenches are truly "professional quality" tools, made of specially forged alloy steel, carefully heat treated.

PROTO TOOLS

2217 Santa Fe Ave., Los Angeles 54, Calif. Eastern Factory, Jamestown, W.Y. . Canadian Factory, London, Ont.

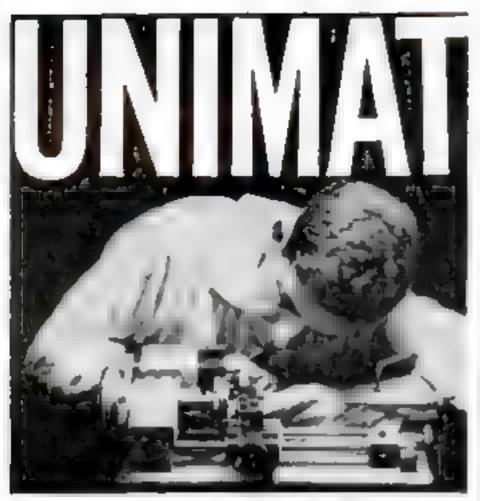


MINIATURE MACHINE SHOP

"No higger than a typewriter, outperforms machines many times its size." That's what Mechanic Illustrated says about UNIMAT in a 3 page feature story, UNIMAY is the precision tool that craftsmen, inventors and hobbyists dream about. You just can't beat it for machining small parts from sicel, bross, aluminian, wood and plastic. You Il want a free reprint of this story plus complete information about this amazing 10 in I workshop. Write today to.

AMERICAN EDELSTAAL, INC. UNIMAT DIVISION Dept. 112 • 350 Broadway • New York 13, N. Y.

TOOK IN \$2 FIRST 10 DA Some make more, some less

We help you to start Your Own All-Year Business Make Big Money! With our easily operated, highly efficient wall washer, Chas-Stelle took in \$217 gross in first ten days. E. L. Goss took in more than \$10,000 in one year. E. C. Taber wrote,

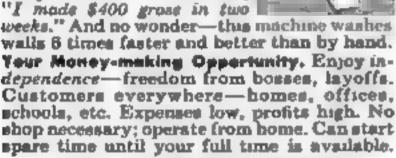

Lose no time. Get all facts without obligation

ı	FREE BOOKS, MAIL COUPON TODAYS	
	YON SCHRADER MFG. CO. Will "W" Pl., Racing, Wisconsin Bend at once (no obligation) your FREE	
***	booklet containing information about your WALL WASHING MACHINE and how I can start my own permanent, profitable business.	
•	Address	****
:	CRyZoneState	

24 YEARS AT THIS ADDRESS

Our entire stock of very alignity work EXTRA MILEAGE TOP DRADE Tires, Written Guarantee Sent, SEND AD

EVERYBODY 10% 00

ON EVERY

With Each Passenger Fire

II you buy 2 to more Pattender 4-sty lines WE GIVE ONE tire FREE, on each order, Does not in-coude W W. or Truck Tires, Seed Ad.

WHITE WALLS	\$1 00	EXTRA-	-12 MOS. 1	WRITTE	M QUARAN	TEE
600 16 15 25 1	640-15	54 95	700-15 6		700-20 1	511 95
400 18(6) 6.45			750-16-H)	10 25	750-20(8)	10.95
650-16 5.46	740-15	5.35	700 17		#35·30	10.55
650-16(6) 0.45 I	700 15	D. 42	750-17		100-20	10 75
	800-15	B 75	650-20		1000-20	17 95
750-16 0) 7 45	#20-L5	2 73	32x6 X		1100-20	17.95
630-15 5.78 1	700 16	41 1 13 1	32×8 (0)	12 35 1	1000-22	20 95


* ERTRA SPECIAL" Fully Guaranteed at size 4-pty pass, PREE TIRE with 2 or more of these -- W. W. St DO Extra. Factory Tested Tubs given. GIANT TIRE SALE,


\$878 AND \$628 ANY BLACKWALL FARE.

All over the U & A. All tires shipped
M.G. with this ed. Dept. E. Ne G.O.D. STANDARD 834 N. Broad St., Philadelphia 30, Pa.

FREE FROM TRUSS SL

Now there is a new modern Non-Surgical treatment designed to permanently correct supture. These Non-Surgical treatments are so certain, that a Lifetime Certificate of Assurance is given. Write today for our New FREE Book that gives facts that may save you painful and expensive surgery, and tells how non-surgically you may again work, live, play and love and enjoy life in the manner you desire. There is no obligation. Excelsior Herais Citale, Dept. 2705, Excelsior Spgs., Me.

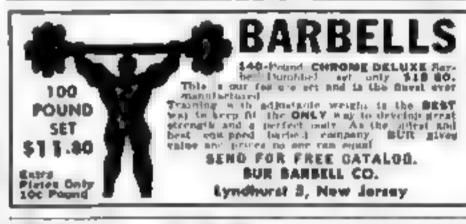



MONEY WITE RAINBOW ROCK

world's most beautiful tioms brack, Cuts building costs by everthird, Sali all you make to contractors, augusty houses, others. Nandy no ang-cial skill. Operator indoors or out from common electric socket. Protocted franchise. We help you start. Write for FREE facts.

Praised by architects, builders. Makes Inside, outside waits fences, porches, fireplaces.

GENERAL ENGINES CO., INC.

Dett. SR-127

Route 130, Therelars, H J.

FREE	GIANT CATALOG
Bloodt	MAKE BIG MONEY
Elica Gilbert	Selling name brand merchan- disa. We give you everything you need to got started in your own business. FREE! Glant New 124 Page Ca or Calabay plus confidential dealers.
Green Toy	wholesale price list You buy at lowest wholesale prices. All erders, shipped immediately fram our grant warehouse Write TODAY Our name does not appear.
	FRALEIB COMPANY Square, Dept. PS New York 3, N. Y.

Electric power 1001S FOR HOME WORKSHOP PROVED BEST FOR THE MONEY BY FAR Superbly made 111

POWER SAW

B SAWS IN 1



Only \$29.95

2 SPEED POWER DRILL



Only \$29.95

Fully guaranteed Here's top quanty at lower cost

NEW FEATHER-LIGHT 100-WATT

ELECTRONIC SOLDERING GUN



Only \$5.95

Other WEN products-" Quick Hot" Soldering Guns and Kits \$7.95 to \$12.95 Sander Polishers and Kits \$13.95 to \$19.95 Saw Table \$17.95

They make grand gifts tool

PRODUCTS, INC., 5808 NORTHWEST HIGHWAY, CHICAGO 31, ILL.

ments, it's a whole

(Export sales, School International, Inc., Chicago)



Big Money "- sure it is because Huge Profits are waiting to be "tapped" with this MINACLE NEW PRINTING MITTHOUGH NOW, you may there the exerting secrets and build a big paying FVIA.
OR SPARE TIME Seven Frinting Business right
IN TOUR OWN HOME. Yes, we'll teach you, too, how to turn pennies into dollars in this newest, most sensational printing method ever tovented. WHAT IS SCRUEN PRINT? It is an extil ag new printing lechnique - amatingly timple and last nating. (It may soon revolution to the unit of printing industry) has frequence the unite printing (adustry) NO EXPENSIVE EQUIPMENT, no printing press, no cult, no art ability, no experience is necessary - yet you can print beautiful professional jobs on PAPIG. GLASS, LEATHER, CLOTH ANYTHING! You print is all colors-even new "glowing FLUORESCENT COLORS, It's amazing but that EARN PROFITS in your garage, hasement, kitchen, spare room - anywhere It's much easier than you think, Then expand as this new printing industry \$12.50 per he HELP FILL THE MIGE GROWING DEMAND. No selling because every business in your area needs Screen Printing. You can save them up to 50% on printing, too WE MIPPLY EVERYTHING YOU HEED. Never before has such a profiturity been offered to anyone weshing to start a full-time or space-time "husiness of hit Don't Hesitate' Walle!

Screen-Print Cu., Bept. 112 15137 S. Breedway, L.A. 61, Calif.





MAZ MUSIC DISCOVERY

PLAY ANY INSTRUMENT

-even if you don't know a single note now!

NOW It a FARY to learn ANY instrument. No baring event ex-bren (from to know a studio size now we as late no 1 as) a delightful pieces RN, NT AN NY right from your FIRST le on A A, roperty BY NoTE Simple as VR I Make absolute integer a No sheets) there is never believed those is space to the said a to there they a few contained beauti 500 000 anders to the leatings TV Star Lawrence West (Now in our 18th successful year)

FREE 36-PAGE ILLUSTRATED BOOK


Jun wend this ad, with your name and address Ble in relation to U.S. Bahsol of Music Bruden A 512 Port Washington, N. Y. (No observant, no patesman will this



Name... terrace deint Paints

The 6-Transistor

Arhitects.





build your own



radio and SAVE

barrery life unbreakable my fod

efficient, a transistor cicu" and easy step by step assumbly instructions and pictor a diagrams. Have

un bur ding and using this fine set.

plastic cabinet in Horizer Glar

MEATHRIT TRANSISTOR PORTABLE RADIO KIT

MODEL XR-1

(with cabinet, less batteries) FREE HEATHKIT CATALOG AVAILABLE

Plenter in "de-it-person it" olectronics

Describes many more "do-it-yourself" first for hobby shelisshem rad oand experimenting Gel your copy now for complete selection of fun projects that save you money



Shop. WL 4 lbs.

HEATH COMPANY

BENTON HARBOR IS. MICHIGAN Please sumi FREE Hunthild Calalog

A SUBSIDIARY OF PAYSTHON, INC.

HAME ACCRESS ...

CITY & STATE

intures quick, easy resulls every time Com-

Use "IDEAL"

Model 300

pore a facts and you !! deal --- leading mawer sharponer (or 55 years. Make more money -will for free calalog.

New offichment mokes

perfect real and rate y or o - reberre ebo d shorpens theors other too st ideal a enclusive

hook as nd ng method

deol



The FATE-ROOT-HEATH Co., Dept. PS-12, Plymouth, Ohio







IN SMILE MATERIAL MODE Bit to DRILL- REAM-SAW AMBLE 1990: FRANSIFF RANDING

Fito any 14" or 14" electric drill or drill pross Drill's own 16" starter

hulu tuts alra ght, Now, Low Price 295 of I near High Speed, thrasian resident steel, tasy to use.

Money-Back Guarantee | Perpet Specific Die für Wand, Privat Hotel, All-Parane Cett

INTERNATIONAL TWIST BRILL CORP.



Be Your Own Boss in the Profitable Excavating Business!

EARN UP TO \$1,000 AND MORE PER MONTH

Wherever you live, you'll find plenty of profitable work the whole year 'round for this versatile outfit . . . not just a "trencher" but an all-purpose excavating machine! Custom operators everywhere are making big money with Sherman Power Diggers. ONE BOUGHT A FARM WITH JUST THREE YEARS' PROFITS! Work for builders, contractors, utilities, and municipalities on such jobs as septic tanks and drainfields, sewer lines, fuel tank installations, foundations and footings, gas and water lines, field tilling and many others. The Sherman Power Digger mounted on a Forll Tractor travels quickly from job to job, digs at a fraction of the cost of manual labor. It's simple to operate, easy to maintain, built to last.

Send now for information about the easy-toget jobs for your Sherman Power Digger. Let us tell you—without obligation—how you can go into business for yourself with an investment of less than \$5000. Or make a small down payment

and pay the balance from earnings.

SHERMAN PRODUCTS, Inc.

Dept. 4936R Royal Oak, Michigan





Aform PLUS Sure-Fire "No-Selling" Plan Offers

Ambitious Men Huge Profit Opportunities

DEMONSTRATION

Sensitive ' Lighted match triggers Alarm in 2 seconda'

Nearest Thing to Automotion Sailing

With our field-tested plan customers well themael es No cold canvassing no hard selding it a the
nearest thing to Automation Seiling Even a
child can use plan successfully with powerful
sales tools we give you (which you leave with
prespects) This plan makes money for you
even while you sleep! No room here to give
you full details, but write for amazing facts

Bend no money Just rush your name and address for all the exciting money-making facts, complete fillustrated Suits Rit everything you need to make money first day Learn how selling only 20 Fire Alaxins a day brings you \$1 080 50 a month. No competition, Rush your name and address today.

PREE SALES KIT

MERLITE INDUSTRIES, INC. (Alarm Div.)

114 E. 32nd St., Dept. \$-160 New York 16, N. Y. IN CANADA: Mepo Co., Ltd., 371 Devel St., Mentreol I, P. Q.

ENGINEERING



ADDRESS

Photo of Heald Electrical Laboratory Enroll New for New Torm

Hoold College Runks FIRST West of the Manuscippi in "Who's Who" in America

Send for FREE Information

Heald Engineering College

Van Sess at Fest, Dept. P.S. 1257 Sem Francisco, Collfornia Thousands of Engineers Needed for Hard Pressed Industry BACHELOR OF

STATE

BACHELOR OF SCIENCE DEGREE, 27 MONTHS

De	-	Cour	-
		A-BALL	

Electronic Engineering
Electrical Engineering
M ghway Engineering
Mechanical Engineering
Structural Engineering
Civil Eng. nearing
☐ Architecture
_


Mycuitecinie
Diploma Courses:
TELEVISION Caler 11
☐ Tool & Die Design
Architectural Drofting
Entitoral Drafting
Structural Orahing
Surveying
☐ Estimoling
Muster Electricion

Approved for Veterans

MALIE				
STREET_			 	
CITY				
SIMIC			 	

Coming in January Popular Science

Annual Auto Issue

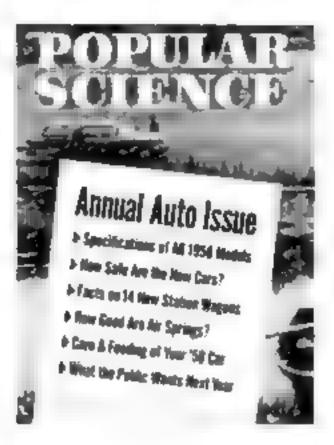

Be sure to see this thrilling once-a-year event! The January issue of POPULAR SCIENCE will bring you a giant special roundup of 1958 cars and station wagons. You'll get dozens of pages, packed with factual, straight-talking articles, jammed with detailed specification charts, loaded with exciting pictures in black and white and in gorgeous color. Here's just a small preview peek at what's coming in the Annual Auto Issue of January POPULAR SCIENCE:

HOW GOOD ARE AIR SPRINGS?—The hottest innovation on the '58 cars is air springing, and January Popular Science brings you all the inside data. You'll see a detailed specification chart that compares the air-spring systems of every major-make car that now offers it. You'll get the answers to: Are air springs really better, or are they just a sales gimmick? Why are they so popular so suddenly? How do they work? What are the special service problems of air springs? What are their particular advantages? Disadvantages? How does it feel to ride on air springs?

FACTS ON 14 STATION WAGONS-

Page after page of superb, full-color photos of station wagons by Pontiac, Chevrolet, Oldsmobile, Buick, Studebaker, Ambassador, Ford, Edsel, Mercury, Plymouth, Dodge, Chrysler, De Soto, Rambler, You'll also get a handy comparison chart showing all the vital statistics for all 14 wagons. For instance, you'll see how the dimensions of a Ford cargo compartment compare with those of a Chevy. You'll learn the cubic capacity of a Plymouth wagon compared with a Buick. You'll see at a glance the number of seats, width and height details, number of passengers, etc., for each of the 14 wagons.

PLUS

- · Specifications of all 1958 models · How they sold in '57
- How safe are the new cars?
- What the public wants next year
- · Care and feeding of your '58 car · All your regular favorite features!

Ask for JANUARY Popular Science . . . Out Soon

Now you can get the motor used to power millions of America's most popular appliances...





For 67 years Emerson-Electric motors have been the first choice of leading appliance manufacturers. Now, Emerson-Electric is offering you these famous motors, engineered with you in mind. Twenty-one different designs from % to 1 H.P. Get yours today, or write for Free Catalog No. M-153. The Emerson Electric Mfg. Co., St. Louis 21, Mo.



For Your Home, Shop or Commercial Use

EMERSON-ELECTRIC

of St. Levis . . . Since 1890

There's money to be made



ORNAMENTAL CONCRETE

Manufacture-and anti-Ornamental Concrete Products pourself You can make high profit, less cout products that are easily, party

A simple do-it-yourself with ALUMINUM MOLDS

EMC light-might, high quality Atominum Models bring you ease of operation and mobe copyarrive meaning mode a 470 g at table forces. of sales success. Here is a do-it-pourself project that brings not only fun but maney—Big Maney.






Kits for Christmas

GENIAC COMPUTER KIT

You can construct over 50 different circuits and 40 different mach nee that compute reason solve pursies and demonstrate wide variety of basic computer circuits with the GENIAC electric brain construction hit Thousands of schools colleges, industrial firms and private individuals have bought GENIACS since we first brought them on the market

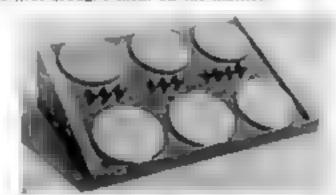

GENIAC set up to do 6 problem in Space Ship Engineering

We have recently added a circuit for componing mysic. which gives us special pleasure because it was designed by a old boy GENIAC Dozens of other youngsters have created their own designs for computing circuits used GENIACS in their school projects and estar shed a solid foundation of information on computers with GE IACS.

Each bit comes complete with Beginners Manual Study Guide, instructions for building all the machines and circuits, rack texclusive with our GENIAC1, parts tray, and our complete question answering service. When you buy a GENIAC you are buying a first course in computer operation

Each kit comes with a one week money back guarantee if you are not satisfied

Price of Kit complete with parts tray rack, all components, manuals and texts \$18.85 (postpaid in U.S. add 50c west of M.ssissippi) (\$2.00 outside United States.)

SCIENCE KITS, Dept. PS-127, Oliver Carfield Company New York 16, N. Y.

126 Lexington Avenue

DECEMBER 1957 47



HOW TO CHOOSE YOUR INSTRUMENT

Write today for your 52 page

ONN color catalog



In color! 52 pages showing the superior playing features of Cone instrumental Trumpets, cornets, trombones, French horns, saxophones, a complete line of woodwinds, described in this easy-to-read estalog Send 25c with this ad today for your Conn Catalog.

NAME	
ADDRESS	
CITY	STATE
I am interested i	instrument now? Yes No
MACON!	c. c. conn, LTo. 1101 E. Beardsley Ave.

Elkhart, Indiana

OUR BEST VALUE OF THE YEAR! 21/2 AMP. RUGGED POWER "4" THOR SPEEDRILL

General Clouck & Key-AC-DC 2400 RPM BRAND

If your work cash tor a "ragged" drift with POWER to SP title . asket on a S. Amp .ob god make gare it s.

THUH No finer drift made: Solub steri bent treated belt sal general personal types on hardened speci belt and plate grant personaled types and ork assembly sample bed ork he and belong triangled t Beared Clerck & Key-AC-DC 2400 RPM



Trices SLASHED 80 ". OR FARROUS ROCKWELL CARRIDE TIPPED CIRCULAR SAW BLADES

There's he had later in saw binder than Rockwes Now Jew ran bu) these blades, in original factory packages, of way half the regular proof. Will fit must radial and politicle and. Carbide the and perfect balance is your assurance of perfect cutting through a l varieties of which and winel attended plustics, syname board, teak ply-wholes, ruders finarisated belts balance its tileboard. In the section of the blade with 10 section 1500 at blade with 10 teeth 0.50 "blade with 10 teeth 1500 at blade with 16 teeth 1500 at blade with 16 teeth 12.50 All prices plus 100 at the pp. 2 higher lates to fit Shilling. Many and Course as caws. Please apec 19 when priceing and Check or M.D. C. O.D. top extra MOMEY RACK QUARANTEE

Send Check or M.D. C. O. D. for extra MONEY BACK QUARANTEE

SCOTT-MITCHELL HOUSE, INCDED M 300. 611 Broadway





DRAIN B CIRCULATE
1 ONE GPH OF Fight
-0 % 50 1 HP motor
TYPE X \$10.95

TYPE XB line hearing mode \$12.95
Best for her is very
Perfect to the policy and and a Deat to the perfect to the policy to the perfect to the per

THROW AWAY YOUR OLD-FASHIONED RUBBER STAMP

NEVER NEEDS INK PAD Prints aver 50 000 impressions, Guaranteed. Ories instantly All stock business words—AfR MAIL ofc. Specify deak or gooket pize

\$1 06. ppd. \$2.90 for 2 lines your anno-address,

SIG OF CALIFORNIA 16231 Dickone St., Sopt. P-12, Encine. California

This CHRISTMAS

of fun but complete in from drifte che nett Sizes is no low as 2 MPH for Stille forks ? III' was engine it son up to Ja maies on single fit ng of tank I onder athe Kafe Stundy' Kany to drive. Dealant Inchinian Invertee. For full information write

FABRISTEEL CORPORATION Greensbore. N High Point 200d



GOVERNMENT OIL LEASES


You do no drilling pay no taxes, may realize a king size profit without ever leaving home. Write for free map and literature.

AMERICAN OIL SCOUTS, Dept. PS 7321 Boverly Blvd. Los Angeles 36, Colif

STANDARD BE'S AND DARTS Shoots like an air gun but this hard-shooting pistol uses powder cops to fire ammunihon, for target shooting, plinking or pasts.

Fun for entire family 8 2" overall Made of Styrene and steel. Comes with supply of 88's and darts Money back guarantee At sporte dealers or send WAMO MFG-CO., Box 41-8, Son Gobriel, Calif.

LEARN MEAT CUTTING AT NATIONAL

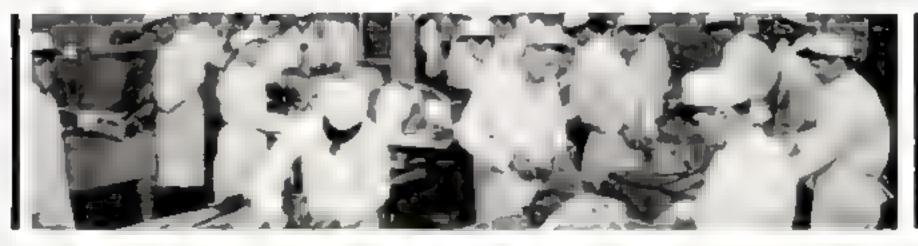

The steady dependable trade of Meat Cutting taught easily in 8 short weeks, YOU LEARN BY DOING under actual meat market conditions in big modern school at Toledo.

For beginners or men with experience. Get a profitable store of your own, Remember, PEOPLE MUST EAT! Big pay jobs, Free employment help. Thousands of successful graduates.

Buying, cutting, percentage, pricing, advertising, selling, etc. A complete retail meat education. National School established 35 years. Get National training NOW. Pay your tuition in easy weekly payments after you graduate. Send coupon for FREE 52 page school catalog — TODAY. G.I. approved.

i	Matienal School of Mest Cutting, Inc. Dept Si Y. Taledo 4 Ohio
ļ	Send the your PHEE school council on Nationa Testening at Tolodo in Most Cutting Most Marchandising and Saif Rervice Music, No obligation No salesman Will call.
Ī	Huma адтесные возгатований рассии
Ĭ.	A60000
İ	Approved for training Kerem Veterone
L.	

GOLD SILVER PRECIOUS METALS with the famous Medal 27 Metal Detector sightweight wind sensitive law cost None timer Also GE-GER COUNTERS for widness and the VIOLTE for temporal INFORMATION FREE THE Detectors COSP 3528 Vinstand Ava. Na Hallywood, Colf

Makes \$216.00 A MONTH IN SPARE TIME!



M. M. REARICK SAYS: "I AVERAGE UP TO \$216.00 A MONTH OPERATING MY DELSAW SHARP-ALL AFTER WORK AND ON SATURDAYS"

YOU can start your own spare-time business in your own home. With the new Belsaw Sharp-All you can sharpen all knives, scienors, shears, snips, ice skates, mower blades, hedge trimmers, grass whips, exes, chisels, screw drivers, scrapers and saws...just about any household, garden and shop tool. Your own CASH business with no inventory. No calls to make. No experience needed

Learn how easily you can start your own spare-time business. Amazing low cost, easy-payment plan. Send postcard for FREE BOOK.

708 Field Building + Kunsas City 11, Missouri

LAV	FREE B	ЮОК	THE LAW THAINED
Wisia today for a PREE of Laws (LL B + degree th Law Course, All becausery corrected monthly terms.	shows how to sure trough home study books and lessons	af the famous provided M	mul Hackelo 10 Blacketon Jodernty cont
Blackstone School Founded 1290	of Law, 307	N. Mich	igan Ave
840-	□ F On	Z TERMS	



WORLD RADIO LABORATORIES The World's Largest Distributor of Amatour Radio Egyt, 3415 W. Broadway - Cauncil Bluffs, laws. PERSONALIZED MERVICE Les I Meyersun MAIL HANDY COUPON WORLD RADIO LABORATORIES, INC. PS-71 3415 W. Broadway - Council Bluffs, fews PLEASE RUSH ME: Free Catalog | MI-F! Booklet 🔲 1010 on Kitz 📋 Record, Egyt, List 🖬 MAME. ADDNESS. CITY. STATE.





CLOGGED SEWERS? - CLEANED INSTANTLY ... SAVES PLUMBING BILL

than Charlet Dec. for Just Insconnect is a Free the kloting a New Discovers which enables the House Owner, James is or Factory Main. tetuares to rican any Cloggest New r D am. but any me can operate this new Plumbers Flushing Gun which receives air presents on d stag about of water committee the most atob-by the stombours up to 200 feet. Total 1 TS IS A STORBOUGH UP TO 208 FOST THEFT THE MINES I THAT IS BATHTHE IS FLORIE DILLING and HOLSE TO STREET SEW Mad clouged with terease Black, Band II ofto. and paper melt away instant y when struck he the Hammer I be blow of this new on t There is to need to remove wa I or pipe, or

Grease Trap A special attachment allows anter to flow from he tages (brough the Coh while air is re-eased on the pipe Yenta. of starks are no obstacle as five tends to at he observe he natur law. But now a set to the Play here. First no Gen with a COSTLY PLUMBING BILLS SAVED? Tear his let of and write par native and a ress beside it for FREE BOOKLET Obey that any longent will call A post enrine I to Climago Phone Krelare S E 125 MILLER SEWER ROD CO DEPT PS-0. 4540 N Central Ave. Chicago 38, Illinois.

LISTS EVERY MONTH HUNDREDS OF TERRIFIC BUYS IN-


BANKRI, PT. Closesst. Surning Goods
New & UNUNCAL Herse & WHOLE
SALE ITEMS & BELOW WHOLESALE & Source
of 100.000 Herse wholesale. & Mare Maney-Makers obnorten itter

HI VOILE 23 of TERRIPIC offers in Torn, Bonha, blausehold goods, Jewelry. Greating cards, etc. 1
SAMILE RANCAINS - 6 Fartons \$16.00 Perfume at the 6 50c boxes Everyday Venes rands. Je box. 6 11.00 tays. The 8 21.95 allk tips. 120cc

Petitis, Mr grom 6 5:7.50 talking dolls at \$7.503
PLLS MANY MANY OTHERS!!
R C SPS 74), ISSUE NOW OUT: Subscribe KOW;
R C 47NS at red BUY BETTER CHEARER,
NEWER things for remode or for resale at The
MENDOUS PROFITS

1.00 forc Lim ed , me offer to ret 10.000 new subscribtower PRESS INC., BOX 501, Lynn 365, Mann.

STRONGEST



"I was thin, underweight and almost died of Bright's Disease in my youth. My parents' prayers and my determingtion brought me through and led to my discovery of four great body building secrets. These will give you grant strength in easy steps."

BIG DOOK FIFE-WHITE TUDAY

"Learn how vigor, health, fine physique, the admiration of friends can be youre. Follow the simple instructions of my course—a few minutes a day and you can build your body as I have built mine." Satisfaction guaranteed. Act NOW!

MAR ANDESSON PAUL ANDERSON PORT, PS13



\$2.95 OR 2 FOR \$5.00

With 50 ft, of wire and slightly used battery

TESTED AND GUARANTEED

Write for free list on all types of telephones. Shipments FO.B. Simpson, Pa.

TELEPHONE ENGINEERING CO. Dupt. 12A7 Simpout, Pa.

MISSILE - MASTER RADIO

For stand lifet the grace-time rates with forms So on to Tuner procedure found at himse about to rearly 1 mount design of compact mechanism apply breach a tune interests or play a faither design of the case or play a faither design others to the case of the part 2 and 1 as a case of Yully guara and YESD DNIY \$2.00 to the rich or M O case postman \$3.00 to D or send \$3.00 pd.



7433 Canoda Ave.,

Canoga Park Calif





EISENHOWER, ROOSEVELT,

Your chi, ce of one of those twely unused justage there is the General Review of the property through the property of the Court Review of the property of the pr K. M. WALSH Bet 308 TUCKAHOE, N. Y.

FLECTRIFY Your sawane machines were low prices machines to a try for a 11 10.65 pay machines to a try for a 11 10.65 pay machines all period for a try for a 11 10.65 pay machines all period for a try for a 11 10 pay for a first parties. Must spread for central a Cord sed & Stock a 118 y 80 pay for a 10 day free trial Rog \$2.85 went to a not \$1 pay and the period for a 12 pay and appropriate when the stock and monthly kit sent to the period for a pay form and the period we have a pay form and the period for a pay form a pay





EYE GLASSES MAIL

WRITE for FREE CATALOG WHN 14 **LENS SAMPLE CARD**

Thousands of Customers



QUALITY READING-MAGNIFYING DR BIFOCAL GLASSES FOR FAR AND NEAR ADVANCE SPECTACLE COMPANY. Inc. 537 S. Deurbern St., Bept. SP-12 Chicago S, Illinois



Capacity of machine: \$28.00 profit per bear of eperation.

Carde, Stationery. Advertising, Circulars, labels photo and movie titles church work, tage, etc Sure money Sold direct from factory only Russed printing like engraving, too.

Own a Printing Business

Print for Others to at Front Ha e home about the or present to her to be the Marin War adjusted the for the entained of my lite and at details

KELBEY PRESSES, C-33 Moridon, Comm.

home & cur APPLIANCES Factory-wired \$15.75

All-mone four Princetts acres estimates producted who chacker Locates derects in irons, long refrigorisary million, air commissioning. In & radio fuber and party, halleries, generalors, etc. (Jose Instruction Spin has infrador PS 12 Nam of 50 provessores fortraments & USS. — Wells for Field Estates

🛎 Electronic Instrument Co (Inc., 11 co mormos ford. L. i. C. 9, M. V.



 Here's YOUR chance to start a money-making, year-'round business of your own and make the success you've dreamed about. R. O. Donnley took in \$40 in seven

hours. O. W. Ware landed a \$750 hotel job. R. Traynor grossed over \$450 00 in five days. Homes, hotels, offices, clubs, offer you big profit possibilities. Auto upholstery also.

NO SHOP OR OFFICE NECESSARY. You clean furniture on customers' premises. No hauling No high rents Supplies inexpensive, operate from your home. What you take in is mostly profit.

 If you want to be your own boss—free from layoffe, strikes and bosses, we will help you to start and succeed. Don't delay ... read the facts, then decide for yourself.

MAIL COUPON TODAY FOR FREE BOOK

VON SCHRADER MPG. CO. Will 'D' Fl., Rucine, Wisconsin

Without obligation rush your FREE booklet about how I can start my own permanent, profitable electric Upholstery Cleaning business.

Nome	 	
Address		

Make \$20 to \$30 a Day by ... MAGIC MAIL PLAN!


man-de work in SPARE TIME at home --- or expand into FULL TIME business. Send coupon for Free facts about the newest and most fascinating of all home operated businesses. For the first time a simp, fied machine brings the fabulous profits of Plantic Beating and Plantin La minating within the reach of the small operator. Any-

y the directors you mail to bring back cash and orders, waste a minute Rush your name. We'll send you FREE outpaid, pictures, prices details, and all the facts you need at. Mail coupon or send name on postered. No charge.

Electric Ca., 1512 Jarvin Av., Dopt, L-3-P, Chicago 26, III

113	me can care to operate the mactine with a few minutes practice—then with our magic Mail Plant can get mail orders pour-ing in day y with much the every envelope.	Don't wand post to start.
	Make Thousands of Beautiful Art Cre	
THIS MAN	LAMP BASES . BOOK ENDS AL	LIN /
the machine a Finite Scaling of Job - ordered by mail - only ile in material cost brings back \$2.58 in cash by mail		4

WARNES Dept. L At no co postage	·B·P.	Chicag	o 26	, III.	rte detaile	
Nama				_		
City		2.	Ma	State		

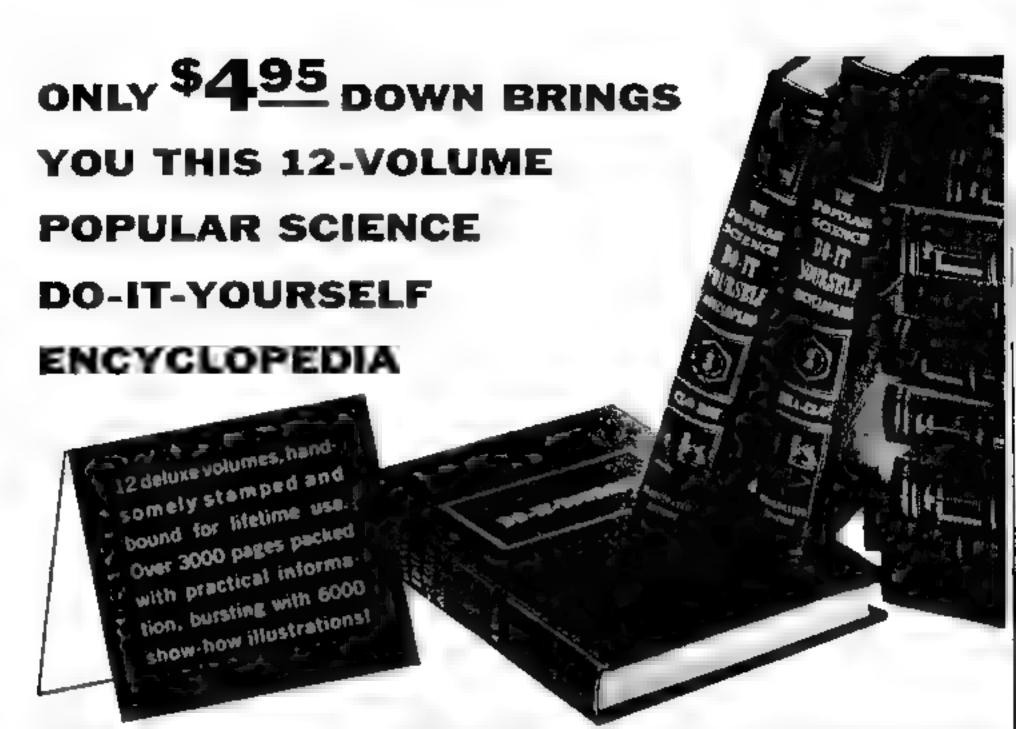

Just a Few of the More Than 1000 Home Repairs and Improvements, Shop Projects and Tips, in the POPULAR SCIENCE DO-IT-YOUR-SELF ENCYCLOPEDIA:

built in units for every room . how to make awnings - car care - drainage system repair . electrical repairs - how to finish wood - garden and lawn care . hi-û techniques . how to install intercom systems how to make wood joints * how to modernize your kitchen . how to install modern home lighting systems • electric motor repairs • oneevening projects • planning a patio roofing repairs and maintenance sanding tips * toilet repairs * wallpapering . painting . baby furniture * modernizing your bathroom . how to work with concrete . power tools and accessories • floor repair and new floor construction garden pools * modern heating systems . how to buy lumber . how to make outdoor furniture

All the information you'll ever need for the repair, improvement and maintenance of your house, your car, your lawn and garden, your garage and just about anything you own-right at your fingertips in this magnificent 12-volume set.

The 12-volume POPULAR SCIENCE DO-IT-YOURSELF ENCY-CLOPEDIA brings you over 3000 pages, with more than 6000 photos, plans and diagrams that cover every subject of interest to a handyman and homeowner. You'll find repair and improvement data for every room in the house. Information on wiring, plumbing, painting, insulating, papering, decorating, plastering Pictures and descriptions of nearly every hand and power tool, every handyman's gadget or device. Shows how to use every material from asphalt shingles to upholatery webbing. Brings you projects ranging from an ash tray to a built-in laundry room.

Best of all, only \$4.95 puts all 12 volumes right in your hands for free examination. Use it for 10 days. Then, if you're not convinced that this set will save you 10 times its modest price, return it and we'll refund every cent you peid. Otherwise, you send only \$5.00 a month until the low price of \$19.95 is paid.

Rush the coupon below with only \$4.95 TODAY. We'll send your complete set promptly and postpaid! But you must ACT FAST. Limited quantity available.

ETTY	ZONE STATE
ADDRESS	
Same refund guara	niec.j
If you prefer to s sheek here [] and	and payment now — thus saving us billing expense — enclose only \$18.95 in full payment. You save \$1.00.
ied, I'll return the	F ENCYCLOPEDIA for free inspection. If I keep it, distronal monthly payments of \$5.00 each. If discretises set for full refund.
I'm enclosing \$4	.96. Please rush my 12-volume POPULAR SCIENCE F ENCYCLOPEDIA for free inspection. If I keep it.
Gentlemen.	
POPULAR SCIENCE	MONTHLY, 353 4th Ave., N. Y, 10, N. Y,

Electric Home Recorder



Complete Sel Posto, ed Only
(Package of 5 Blank Record Discs \$4.98)
Johnson Smith Co. Dept 598

Bend 100 for amazing entains of novelties, live animals, actent file supplies, hubbles, furmakers, a pres & boats, looms, wages tricks, jake arts et, unusual preds, pagget timesavers comeras, oat ant poods prejectors, movies, fuchy jewelry, religious novelt es, disoulate, movies, fuchy jewelry, religious novelt es, disoulate, musical instruments stamps, coins, putales, fortune to lere, radios, auto & bibe accessor es, telescopes, magnifiers, compatited, banks, amoters' padgets, art sit' auppliet printing setts, engines, motors, anothers, histories, bifolds, fremorks quite, ratios, paperts, books games, plants, etc. Send name, address & 10c to: 100 MISON SMITH & CO., Dapt, 598 Detrait 7, Michigan



WORLD'S LOWEST PRICED

COUNTS UP TO \$55,505.505

IDEAL FOR SUSINESS AND PERSON.

AL USE—QUARANTEED ACCURATE.

Not 8 toy Operates with only a finger flick. Aids. subtracts, insur plus, do not real furnity on to one of loss Park for their over and over Ideal Life—for the person.

It is post theories Tax and school tax.

MINKY TAKE GUARANTEE Rend to the monthly flat of the postage flexibility rich looking Lasthurette Case the coulded at no estra cost Money back in 10 days if

ended at no estra cost Money back in 10 days if not do where A FNTS WINTER CAUCULATOR MACHINE CO., (Mire) Hex 126 Dept. CI-B7 Huntingdon Valley, Pa.

FREE-Amazing Book on RHEUMATISM, ARTHR

If you suffer aches, pains and discomforts of Rheumatism, as manifested in ARTHRITIS, NEURITIS. SCIATICA or LUMBAGO, send today for this FREE Book. It reveals important facts about why drugs and medicine give only temporary relief without removing cause. Expining a proven, specialized system of treatment that may save you years of distress. No obligation. Write for this FREE Book today!


BALL CLINIC, DEPT. 36. EXCELSIOR SPRINGS, MO.





"Save \$ this year on Christmas trees"

Various sizes and quantity offered at bargain prices, write Patrick Goupil, Dapt. 7. Bathurst N.B. 50¢ brings price list and information for '57 and 58. Money orders only accepted.

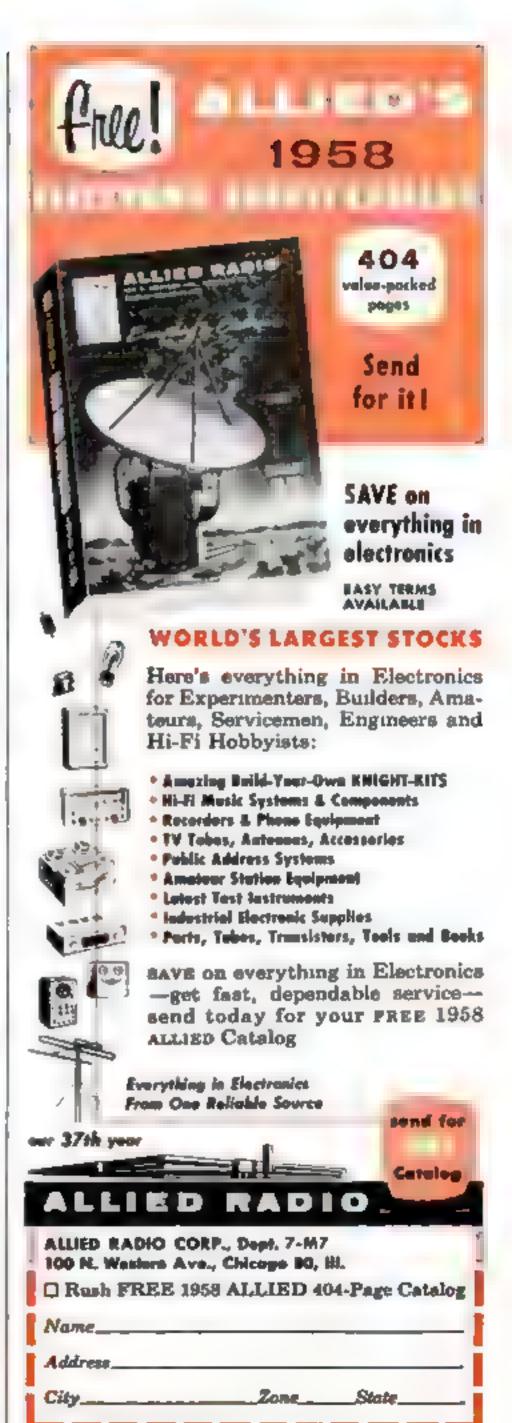



MORE JOBS THAN GRADUATES

You can begin your training in Short Courses and contique progressively toward an Engineering Degree in 31

months A) led is approved by industry National Home Study Council Dept of Education Office of Public Instruction State of Limois, U.S. Dept of Justice

SEND FOR BOOKS

ALLIED SCHOOL 1338 S. Michigan & H., Chicago ALLIED SCHOOL OF MECHANICAL THADES 1338-42 South Michigan Ave., Dept. #\$-127, Chicago S. Ill. Mend ine Without obligation information on your courses TOOL ENGINEERING
MECH ENGINEERING
MACHINIST-TOOL & DIE DRAFTING-ALL BRANCHES TOOL & DIE DESIGNING MACHINE DESIGNING AIR CONDITIONING HEAT & REFRIGERATION MOME STUDY RESIDENT VETERAN MONYETERAN NAME. ADDRESS. COUNTY ...

NEVER AT THIS LOW PRICE!-GENUINE 135-POWER

with Achromotic Lons and 4-POWER FINDER attached

EXTRA BONUS GIFTS:

- · 273 page beck, "Handbeek of the Heavens"
- Magis Star Finder Dial
- 220X & 400X Eyeplece lentet



5 Magnifications 18X—35X—65X—85X—135X Brings the Moon, Planets, Stors, Satellites, People

Noter before has an AUROMATH 135X telescope with range finder and tripod solo for anywhere near tols amaring are priced Now you can not only explore the asserts and bring the man, planets, stars, satel tes 135 times cover but yest can observe all distant objects people, ships too because all piet rem are greet, qui upate e lown, as an al autronomical reje-The kit I of theelfe dury gold free steward on via gents he achievanthe lens can bring you. Ready for immediate ose 5 proceson ones bring you treating at 18X 35X 65X 85X 85X 135X Tubes extend to 43° male of bakelite, unished in camera helb as back tripings! with gleam he brass 4 power figures grope. I donn Long to injury the engage of the second of the sec rast con head fittal with i therefore a tamous 350 begree at a inframe mount that belts insure v in any position. Obtain able only from the terms is a shapped prepared for my a fix 273 page book. Handbook of the History Mare star information, that of is in mon ing stars ANYWILLER at ANYTIMS of the year 220X & 600X syspines lenses included free for experiments. You must be completely satisfied in hith; super after limints. You must be completely satisfied in hith; super after or your money back in full S igned t complete nothing else to buy at amaze ally aw price of \$18.35, We hout traced \$14.35.

Send Cash, Check, or Money Order today

Dept. PST 22, CRETERION CO., 331 Check St., Hartford, Cons.



INSURANCE POLICY given with each used tire cold we guaranter the amount of

tervice you pay for SOW HOLL ON A B Q AL Deduct 10% on orders for Two er More used licen

SPECIAL

YOU CAN'T LOSEN

GOODYEAR SCHURNANATE TYPE SHOW TIRES

New Tire Guarantes—Factory Rebuilt BEST WINTER TRACTION OF ALL!

270112 59.95 | 740113 450110 450KLS \$10.90

Super Quality — Support Performance — 4 Months tonored Bervielle 600x16 53 65 870x15 53 95 700x16 54 45 760x16 54 75 450x15 3 85 670x16 4 05 710x16 4 35 820x15 4 65 650x16 4 25 700x16 3 85 760x15 4 45 550x17 4 65

600116 1 600116 4 650116 4 50 95 45 25 700x15 550118 550117 850111

Whitewalis \$1 00 extra

MIDLAND TIRE SALES

Sire and other a on Mail Orders. F.O.B. 191 at a reason we be such index the duct 3 kills on orders for 2 or more used treatment of the No. 191 at the second of the Month of the No. 191 at the second of the No. 191 at the No. 191 a 3701 S. Harmus, Gapt. \$5-62, Chicogo 9, 115,

#ATTORTLESS



LF OR RESUL FOR BIG PROPITS! NAM o affliances, tools, watches, cam HONOS, SEWING MACHINES, JEWELEY, HOUSE-WARES, SPORTING GOODS, TYPEWRITERS, ETC.

OUR BIG WHOLESALE CATALOG OF OVER 2 000 PROFIT



000 A MONTH

That's What Stanley Hyman Made Salling PRESTO AMAZING MIDGET FIRE EXTINGUISHER



R' Stattery Hyman 14. MERLITE INDUSTRIES. Profits Day East 32nd St. Dept. F-160 New York 16, M. Y. Canada: Mope Co., Ltd., 371 Down St., Montreal 1, F. Q.







MAKE MONEY

OPPORTUNITIES

Here are hundreds of appartunities affered especially to the readers of Popular Science Monthly.

Read them. Answer them! You can make and save money.



POPULAR SCIENCE MONTHLY - 353 FOURTH AVE. - NEW YORK CITY 10

Classified Ads unty \$1.00 per word insertion, payable to advance. Minimum ad 10 words. To be included in February Issue, copy should be in our office by December 20. He consolications accepted after December 15. Address orders to O. K. Kelly, Classified Adv. Mgr.

AUTOMOBILES & MIDGAT CANS

OLD copies of Popular Science wantedany issue from period 1800 to 18.5 Condition not too important provided books are complete with no pages removed. Write to Box No. 308. Tackahoe. New York

DUAL C sas-Park Mufflers, \$14.00 Any Car Rosecrans Mufflers, 5046 Rosecrans, Paramount, Caulfornia,

BUILD or buy small-scale midget Blueprints at Schermerhorn, 2824 & Commits, Tulsa, Otia.

CROSLEY And Foreign Car Owners Catalogues Available Farts Discount Box 1, Elmunt, New York

HUNDREDS of automobile catalogs—old new and foreign dealer bunks given photographs shop manuals free motor magazines inted by non-profit club Write to get on free mailing list. Auto Manuaco, Inc., Stockbridge Michigan.

CHEVROLET VS Owners Secrets now evaluate on Power Acceleration and Performance Dynamometer proven Information in Detail Send 2, 00 to Paul of Englishes P.O. Box 124 So San Gabriel California Money Back Guarantee

ALTO SUPPLIES &

SAVE money on Jeep and army truck parts Large inventory Catalogs for Jeep and O M C owners American Auto Parts Co 1830 Locust Kansas City, Missourt

AUTO Accessory and Parts Catalog, 1987 edition on new! 218 pages, Save up to 50. 15 000 items including Hollywood accessories, hi speed eq., pment rebuilt engines all parts and accessories for all tars and trucks! Hard to get parts Send 25c (refundable) J. C. Whitney, 1918 PS. Archer Chango 14. Illinois

CAR Bed Conversion Eli with complete instructions now available Works on 2 or 4 door Sedans Cub Coupes Station Wagnons and Convertibles Convert jour car available of single bed when preded We manufacture custom made car acreeis for all makes and model cars. Also "Sportsman Dallie Camping Trailers with optional Boat Carrier and 12 and 14 foot boats For further information writs Car Bed Manufacturing Co. Dept. 5 P.O. Box 211, Panama City Florida, Dealer Inquiries Invited.

PREE Clant 1866 Faria Calalog. Thousands Scarce Accessories Stores Don't Have Oadgets. Custom Equipment Send 25c Fostage (Refundable) Newhouse Automotiva Industries, 5805-PS Bevery Los Angeles 22, Calif

PORD A and T parts? Try best source old model parts, all makes. Washirwaki, Milwankee 7, Wisconsin.

1MPORTED English Chamels 30x27 64 95. Emil Thuriot, 2203 Russet St., Hacine 1 Wisc

CHROME Plating Ell. 13 10 postpaid anywhere Guaranteed Pairmont Chemical Company East Syracuse. New York

PUT Leap in Your Jeep, Henry-J, or Kaiser V-S Power, See Jeep Owners Ad. Page 238.

TO FIND WHAT YOU WANT

Advert ster Agencies for Advertisers Agenta Wanted TA A r Lond tunning Anthuses He ra & Indian Goods 16 APR ALL NAMES OF Auto Suppl as & Equipment Auto Tra eco Automotives & Midget Care à Battaries Superstors, Etc. • Seats Delbuard Motors Heat But of the State Etc. 11 13 Bucks & Magnetons Musiness Upperhabities Business Buretco Information, Name Lista Buy It Whotenale . BUA tamerna Photo Supplies tamping Key pmont & Tonto 34 tart son ng & go Painting Chailt Tatha thumsory & Physica to it Photo Furtahing 114 334 40 desection. 47 Do It Yourself Bomstern & Pots SECRETARIA DE American, Motors, Mac. Farms Other Real hotate Fort a on Telescopes For Intert is For the Maccilehouse For the Mone Fortuses Plane, Mc bames & Entertainment houger Courters Treasure Flaters 14A 424 Help Wanted Reports H does tot exclama here refreshas Managed I same 24 Investmen Wanted 61 . 48 Landworks Onthin Machinery Tool Supplies the Magic Tr he Presiden the Ma u noted off Matters a & Proclose Stamps 924 411 뫮 M. e aperas
M. store M. stol Supplies
M. a making Opportunities
M. a Pillares S. des Sound Equip
M. arcre es Strates & Supplies
M. Music Song Writers & Records 30 Of Interest To Women Ed ()) Jewerry Watches Ed Stamps Wanted 10 27 Patent Alterbeys Patents For Belo Cerama. Finishing, Photocoptes Etc. 34 . 40 . 49 . 31 . 57 . 58 Pinelics Par B Plactics
Play Blactes Etc
Pourry & Supples
Profite Ma agraphing the
Profite No. Supples
Profite No. Supples Profitable Occupations Radio, TV Supplies & Epsipment ... 36 Radio: Blades Shavers ... 74 Rubber Stamps & Office Supplies ... 56 Store of Goods Gune Picking Tockle, 61 Ata hip Cotterling TOA Harrywood Instruments

Tationing Supplies Tobaccu & Pibes Trees Shrubs Boste & Mories

Trigogometete Typewriters & Office Machines

Wanted to Buy

We ch Hess ng We my A are) We don't Sectoring TROPICAL Olo -Straight Cerneube Was Postsh Unescribed for Automobiles \$1.50 postpaid, Was Products Co., Escanabe. Mabigan

MO Drip Yent Window attachment, lets air in, beeps rain out, \$1 05 set. William Rott. 112 Choptaw Drive, Weshington 21,

RING-Valve Job while driving, \$4.00. Literature, Moteloy, Grantham 27, Pa.

BUILD Your Own Supercharger-Complete Plans and Instructions. \$1 00. Alanne Products. Box 135-A. Watertown. Conn.

AUTO TRAILERS

BUTAD Expanding eight foot trailer Accommodates five Literature 10c. Framer Company Wilmington, Massachusetts

MOTORCYCLES, RICYCLES AND SUPPLIES

RECONDITIONED Molorcycles and motors. Chromium accessories Complete stock Ind an parts Expert rebuilding Fast service. Ind an Motorcycle Same, Earnes City 27 Missouri.

1953 CUSHMAN \$15. Midget car \$25 Micromidget \$45 less motors Motors \$3 up Evircode outboard \$40 Whinter \$7 50. (Mail order only) Send 25c (25c for First Class Maning) for new \$2 page Directory-Catamque Number Eighly listing these and hundreds of other bargains in new and used motorscoolers in dget cars, hume-builders parts piants etc. Midget Motors Directory Athens, Onlo.

BANKRUFT Motorcycle Bargaine at Givenway Prices. Cataging Bunetin Mo. Bunice. 166 Bk. Covington, Virginia

MSU scooters and motorcycles, BMW motorcycles, 2 to 35 HP shalidrive and chandrive Butler & Smith, P.O.E. 45. New York 24

AVIATION

AVIATION Surplus Bargain Catalog. One Dime Box 12P619, Thomasville, Penn.

PRICED Aviation Surplus Catalog, 10c Aero Paris, \$102 Lockbess, Houston, Teasa

SMALL Helicopters Theory and Oulds Manus. Drawings. Construction Data 62 00. Sandhill Aircraft, Box 134, Atkinson Februaks.

PROPELLERS plans, supplies for airboats and enowplanes Latest designs, prompt delivery Catalog 25c Barks-Maxwell, Box 1301G Pt Worth 5, Texas

BUY Surplus Alternita Puseleges Assemblies Alternit Engines Hetroptem Listraments Rectronics Radiotelephones, Muc-Buy Direct now from U.S. Government - Depot List & Procedure \$1.00 - Brody Box 1-PS. Sunnyside 4. New York.

BUILD "Playboy", Popular, Righ Performance, Aerobatic Sportplane. (New, Revised Blueprints Bend \$1.00. In-Plight Photograph Complete Data. Bruchures. St is Ageraff, Box 1986-S. Riverside. California.

** 68

84

T#

HOMEBUILT Helicopter Handbook \$1.00 Homebuilt Helicopter Directory \$1.00 Urshan, Box 4132, N. P. Station, San Diego 6. Castfornia.

BUILD your own plane! Complete plans. Instructions \$1.00. Plying course included. ABC Publications, Box \$49. Sam Francisco I AB. CA JOTAL

NATTERIES. GENERATORS, ETC.

FDISON Nickel Storage Batteries. Any voltage any amperage. Unconditionally quarunteed Power Pants Opperators Mutors, Literature Haway Smith Co. Croson Pales 2. New York

BLECTRICAL SUPPLESS & EQUIPMENT

DC Power Supplies Laboratory Test Units DC Motor Controls Complete line selentum recutture meters, transfermers and other replacement parts Rampr Dept D 2, 1824 East Pirst Street, Los Angeies 31 Chia Drzing.

ELECTRIC Pencil Engravos all Metaus, \$7.00 Bener Mig., 19011-C Springhess. Chicago 41

MACINETIZER - Magnetines-Beres drivers etc. Only \$1.00 Postpaid. Euliak. Huntingdon Valley, Penna.

MOTORN 1, HF LISY AC 66 85 Used Quaratherd Catalogue Westmore s, P.O. Box 82 Mattapan 36 Mass

LAMP parts Whosesale Thousands of Items for repairing converting Catalog 25c Brown Lamp, Box 204D. Clayton S. Missoury

FUSED Outlets Xmaa Tree Lighting Kenru Company Box 121F, Parsippany New Jersey

ALR CONDITIONING 14

ADVANCE tourself in Healt's Air Conwith it may through self-inser a tion method Its uden key to tures. Prepared by segis tered professional e gineer technical in-structor Hend \$12.00 or write David C Chiate Hoa & Campus Station, Cincinhatt Ohio

WELDING, SOLDERING

BUILD fast selling wolded hand trucks Merchandise — Beverage — Appliance — Ltc.) We supply production modes (Bam-ple Utility #9 56) Information Wilson Sizel Products, Childersburg Alabama

BUILD Your-Own welder or welder and power combination. Low cost is introducted to used engine left you weld anywhere bree business tells how Oct lots profitable welding business. Write Hobertweld, Bus P-1372 Truy Ohio.

NEW Metal Etching And Soldering Lext Use Cat Batters Or 1 by Write Acto graph 223 York Road, Jenkintown. Pe paylvar in

ACETYLENE Weiding Outlits new \$54.50, Arcweiders \$56.50, Eagle Welding Dept 42, 5025 Broadway, Chicago 40, Ill.

WELDERS, 110.320, Welds 1," 8.19 50 Morris, 1070 Inner Drive, Schenectedy New York

A C Welders, four sixes, lowest prices Pree Literature, Busgerson Co., Canton.

MACHENERY, TOOL KUPPLIEN, ETC.

WOODSMEN read about the aman ing Sper er No Bounce mas astem wedge - idea for frezen word Se ditte free repy of Ci san Saw Age magazine. Portland 66, OTHER

POWER Tools, not toys, Discounts, Pac-tory catalogs W 'd Teel toup is Box 4404 Joydest Station, Detroit 28, Mich-

PAYSWELL Sprayer compressor type \$6 the presente fime paymen a trades free information Seilco Corp., 234 W 7 St. St. Paul 2 Minn.

Circular Na Way-Do Co., Newaygo, Michagan.

LIGHTWRIGHT inexpensive portable concrete mixer Just patented Free literature Beran Manufacturing Company 900 Duling San Antonio 10 Texas.

METAL Drawers with Index Handles Request Literature. Johnson Products. Chaimers, Indiana

DAWN Game quickly centers round stock for turning or drilling \$2.96 postpaid De-talls from Dawn Crafts, 215 Common-wealth Buffalo id, N Y

MACHINISTN-Toolmakers Depth gauge hardened & ground to 8002 acturacy. Measures any depth. 83 25. Bedco, 2013 Roma, Phoenix Arthona.

SEALED Bid Service \$3.00 year Buy right Surplus, Mechanics, Machine Power Tools Clothing etc., lower than Wholesale Information 25c Auction-By-Mail, Box 222, Hingara Palls, H Y

design telescoping slot gages, hubby knives. Write Campbell Tools Co., 1424 Barclay Road, Springfield, Ohio.

FREE List, power tool burgains, Lair-realt Box 5 5006 Detroit 25 Michigan

TRIGONOMETERS

ENGINEERS, Draftamen Students Triangu stor Makes Trigosometry Kary \$1.00 No COD, Trical, But 67, Buffalo New York

10 ENGINES, MOTORS, ETC.

STEAM Engine Castings 30-30 B R P W Tuominen 731 Coolidge Birmingham. Mich.

DIENEL Injector Parts Wanted GMS1-71 110 ner es Mayer 7120 Carnegie, Cleveland 3, Ohio.

GAS Engines Forscionire Sale: 115 to H.F. Brand New, Factory Fresh, Latest ! M. dels Briggs Stratton Cilnam Lausen Picties v Brios whitesale prices or Your Money Bark \$23.50 a up Freight Paid: De alla Free Northern 172-8 Merrimac Street, Boston 14, Massachusetta

REWIND Motors yourself Complete instructions \$1.00 Lewis Mig. Howell 11. Michigan

ELECTRIC Repairmen Send for catalog Ohrameters, winding equipment, Motor In-

II BOATH, OTTBOARD MOTORS

NEW used rebuilt marine motors. Matine conversions, fittings, Free Catalog Stoken Marans Supply Dept 23, Cons-water, Marin

PREE ing catalog, Boat Elts save in in 2 2 Instant but prices 4 through 12 outboards designed for amateur assembly Trailers Fibers as, Hardware Accesso-ries Luger, Dept. E-12 3404 Lyndais South, Minnespolis 8, Minnesota

FULL size, cut-to-shape boat patterns blueprints, 725-35 feet. Big new 35 pc 11-batts ed Build a Boat Catalog of Mayal arconect-designed Cruisers. Rapubouts 5s 4s Outboard Boats, Saling Racing Houseboats 50c. How to Build a Boat Houseboats 30c Hew to Build a Rout Bookist 22-30 Hardware & Equipment Catalog 22-00 Cleveland Boat Bloopsint Co Dept A-77 Carriand Obto

BOAT Plans-Pull Size Patterns-Frame K ta Modern Inboards and Outboards for amateur by dera Complete New Latalog 50c or specify requirements. Olen Marine Box 560, Compton, Call

CATALOGUE free boating flags, gifts, gadgets Laphthouse, Box 145-A, Physi-OULD. MASS.

SAVE Money. New, used outboard motor parts Send war to Stamp appreciated Outboard Motor Mart 228-8 State Bostory 9. Massacl usetta

MARINE conversions. Ford, Chevrolet-VE Jeep engines, Cutalog 25c Lehman Manufacturing Co. 272A Broad St., New-BIR Z NJ

LAPSTRAKE, Fiberglass Dingy, 2.5 H P outboard, \$199. Powerhoat Plans Catalog soc Marineeraft, Box 161-P. Brighton.

Off. Drum Cement Mixer Assembly Kit. 12 BODY-BUILDING COURSES. BUILDING A ATRLETIC

BUILD powerful arms, chest, shoulders! 22 exercises. \$1 Forwad, Box 601-C, 1180 Market, Wilmington 59, Delaware.

BE Taker Coach a genuine 'Inch At-A-Time System II Strongman Foods'' Il Saturaction guaranteed Marty Snyder. Box 195 PV Union City New Jersey

OUTSTANDING Physical Development! Any age New Guaranteed Discovery Boss Only A Rope Strength Heath, Muscus, Gain Reduce Free Details, Roperciae. 6654 B Art. Ban Diego 15. California.

WEAK Back Strengthen Lower Back Muscles-No Equipment Pres Literature - Lucky Stein, 311 Dessea Drive, Woodbury New Jersey

BARBELLB Dumbhells Exercise equipment Courses Free booklet Good Barbed Co Samain Springs, Ark.

KARATE, Deadly Oriental Soif Defense lituatrated If one Training System \$2 00. Lee FO But 245. Oaktand 4. Cauf

BARBELLS, Body Building equipment Courses, Proc Catalog Reading Barbell Co Reading, Pennsylvania.

CaAIN as much as 18 pounds of muscular bods weight to one math Details free ZZ Products 34 West Ein Chicago 10, 111

PUSHED around? Don't take nonsense from bucker Citye them the shork of their lives. Each when you know Pulce Jiu Jates Complete fully illustrated course in one volume as taught or see and armed forces foud \$1 to m Money back gustan-Books Publishing Co. Amilyville 10.

FIELD GLASSES, TELESCOPES

BUILD your own Reflector Telescope Complete hit M from Evenuese Tripod, all other accessories Request free thus-trated literal re. Cr terion Manufacturing Dept. KP 30, Hartford, Connecticut

MICROSCOPE Catalog Proc. Research Scientific Supplies, 126 West 23rd Street, New York 11, NY

FREE Catalogue Thousands wat surplus option, bargains Lensed Prions
Telescopes Binory are ste Bend \$1.00 for
10 Lens Hobbitst Ket and Project bookiet
O Jamers wil West Metrick Hoad, Lynbrook New York

WAR Surplus bargains! Millions of lenses, instruments, telescopes, historiars. components and complete line of extra-components and complete line of extra-nomical telescope items. World a greatest outs a market place' Sind only \$1.00 for begint or \$1.0 lens hit and big instruction broklet Stock 2-CN Write for calloc CM free Edmund Scientific Co., Barrington, New Jersey

REPLECTOR Telescope Elts 37 25 (2") to \$1"5 on 12"3 Mirrors. Cells. Pocusing Moust to Tripode. E e Systems Abything every hing in telescopes Proc Ca a og Also Brady to the telescopes from \$25 po Esco Products Oakridge New Jersey

AMAZING prices precision binormars Polder Binormar Selecting calmon free Dealers size write Prentise Import-art. Mercury Bidg., West Los Angeles 25, Child one California.

BINOCULARS, telescopes, microscopes Terrific values \$3.98 up. Request free money-saving catalog. Criterion, Dept. 5.51 Hartford Connecticut

ASTRONOMICAL Books, Star-Atlases, free list Herbert Luft, 89-11 228th Street, Bu side 64 Mew York

REFLECTING Telescopes completely as-tembled 60% \$28.75 Quaranteed Ob-servatory clearness Free Information, Accessor, 475 Fifth Avenue, New York 17

REPRACTOR and reflector telescopes. Also mirrors lenses tripods etc. for making your own telescopes. Pree illustrated catalog Suffork Science, Mattituck, N. Y.

DYNASCOPE—Sensational New Reflec-tor Telescope Send for details, Criterion Company Dept. D6-44, Hartford, Connects; ut

IS SPORTING GOODS, GUNS, FISHING TACKLE, ARCHERT, TRAPPING

PREE-Diant 1857 Wholesale Sporting Goods Catalog. Lowest witniessie prices Complete line of cameras, sporting goods, applances, outdoor stems Write Ioday Santa Fe Distributing Co. 1321 Main St., Deot. Ph. Kantas City. Missouri.

FREE Selow Wholesale fishing catalog Fishing Tackle Mart, Dept \$12, Box 6.37 Chicago, Ill.

5.000 BAROAINS, firearms binoculars, war re are catalog 50c. Smith Museum. Runnemede, N. J.

LUCERS' Mausers Coits! P-Mai Kentuckies' Weatherbys Autique Modern Caus. Ouncessories' Super Bargain Cataug only 50c Agramonts s, Yonkers JA, K Y

JAP rifles attering American shells \$4.00 Jap shells \$1.55 catalog \$6, TP Shop, West Branch 10 Michigan

MOLDS for Pasherman's Suiters Jigo. Squids. Casting and Spinning Lures. Free Catalogue, Sweet's Molds, Tonawanda 3. New York

PLY Tying hits for Christmas. Only 64 00, Send for estalog. D. H. Thompson, 323 Walnut Ave., Egun, Elimots

LO CAMPING EQUIPMENT

TENTS world a largest selection, direct from manufacturer Send 20c for 136 page Tent Camping Equipment Cetalogue Handbook lacing al. national ramping sizes (Print name—address) Morsan 10 15th 16th Avenue, Long Island City 1 New York

IT DOGS, BIRDS, HAMSTERS, RABBITS & PETS

HAMSTERS Golden young 13 00 pair Pury developed 14 00 Pair Adrondack Hamstry Prospect 12-N New York

RAISE rabbits on \$500 month plan. Plet ty markets. Free details White s Rabbitry De aware. Oluo

RAISE Mink Pres booklet pen plans, inside secrets, feed care Mink are money makers, Investigate today Lawrence Mokard Brigham City 13 Utah

ARGENTINA Nutria Breeding Stock Available Free Literature—Request Prices Inter Lickes Nutria and Mink Rench. Box 727 Madison, South Dakota

MAKE Big Money Raising Notria, Chinchilas, Cavies, Mink. Rabbits of Pigeons for as Free information Keeney Brothers New Freedom, Pennsylvania

WE Pay \$3.50 lb. dried Grow Mushrooms (tales shed and suddoors, Space for time year round, We have 25,000 customers free Book, Washington Mushroom Ind., Dept. 177, 2854 Admiral Way Beattle, Wash

WILD Anima, Pets-Mammela, B.rds. Reptiles, Amphibians, Curios, Catalog 19: Ray Singleton, Ratheenake, Fla

HAMSTERS—Jdeal Peta Toung golden pairs 5, 95 Breedem \$1.95 Free his kiel Jer Free Hatratery 2425 Hott, Muskeg in Heights 14, Michigan

LIVE Baby All gators \$2.50 ca pustpaid or \$10.80 a discriptorard Baby turi es \$25.00 a hundred Gatora PQ Bux 7541 Matta 56 Flurida

18 EARTHWORMS & PROGS

\$19 200 YEAR possible earthworms, 22 Page booklet tells how 35c Massauri Earthworm Research, Box C-4861, Eab-eas City Massouri

FARMS, OTHER REAL ESTATE

FLORIDA-Nice homesites, \$345 at \$18 monthly Folder Free. Winfree Version Deland Florida.

STROUT Catalog Pree! 3.130 Bargains
M States Coast to Coast Parms Hut re
But nesses World a Largest 51 Years
Service. Etrout Realty 451-ZB 5th Ave
New York 10. New York

TREAS Cabin sites 5 riest mammeth Lakes Finest fishing hunting Good roads electricity Developing fast Private host dock fishing pier barbevue pits takes, and pichic grounds Free to lot owners. Ideal for retirement or recreation Near 3 thriving towns Everything you could wish for Two (2) adjoining bits lotal cost for both only \$145.00 \$12.00 down \$.0.00 month Write for maps, photon etc Dept, OS-2, P.O. Box 50, Kingsland, Texas

DEED to square foot of Indiana, \$1.00. Parkview, Filimore, Indiana

FLORIDA Waterfront Homesites, moderate prived for relitement Months, payments Good fishing hunting Advant Ocala National Purest, Orace Parker Paisley Lake County, Florida

HOMESITES \$393 00. \$10 00 Monthly on 301 Near Bushnell W Blume, Nubleton

RETIRE In California on \$200 month Healthful climate beautiful somery thrining community Pictures full information send 35c postage Wheeler Box 441 Apple Valley Cantornia.

TREES SHRUBS, NOOTS, HERBS

RAISE Your shrubs, trees from seed Pree planting guide, price list, Woodlet Seed Co., Norway 44 Michigan.

IL POLETRY & SUPPLIES

RAISE pheasants on \$100 week plan Little capital and space can make you independent Free details Great Central A stem Columbus 6 Kansas

22 PROPITABLE OCCUPATIONS

TREY Hand him \$100. Free Packet "Secret Journal" 619 secrets-plant! Work home Publico-Ne, Overside Calif

\$5000 FROM Half Acre growing Ginseng trup bought Particulars 190 Associated Growers, Spering Manitobs.

FREE Polder How To Make 23 000 Teach Sparetime Sack) and Rate of Karthworms Oakhaven 7 Crear Hill, Texas.

SAVE Money! Buy Wholesale! Free Cata of General Merchandase North 467-H. Broadway New York.

BUY Wholesale! Over 10 000 Nationally Advertised Products Appliances Cameras. Sporting Goods, Housewares, Watches Typewriters, Tools, Clothing, etc., 5end Postcard Today Buy-Rits, Box 236, Hawthorne 7 New Jersey

BIO Profits in Welding Easy to leafs; Low cost training in completely equipped Non-Profit school GI Approved Write for Pree Booklet-Hobert Trade School, Box P-1273, Troy Ohio

PRECISION Sharpen Scissors, Shipe, Pinkers, Using Inexpensive outfit Blackhawk Sheldahl, Iowa

VENDING Machines—No Selling Operate A Route of Coin Machines And Earn Amazing Profits 12-Page Catalog Free Parks av Machine Corporation, Dept. 17-7,5 Ensor Street, Baltimore 2, Maryland

INVESTIGATE Accidenta: Earn \$750 to \$1,000 morth. Thousands of air mea insurance companies, alrematic times preprint need claim investigation. We from you home space time. Placement counsel a divelop Free book. Non. No obligation Universal Schools. B-12. Soc. \$302. Damas 5. Texas.

1 EARN Invisible Reweaving At Bome Free Details, Jack's Service, P.O. Box 1451 Presport Litmois

FREE Literature—Make Big Money Rathing Pishworms and Crickets. Carter Farm-10. Plains. Ga.

FREE Book "505 Odd Successful Businesses" Work home! Pacific—37C, Ocean-side. Calif

LET Government Mail You Surplus Sales Sotices Bid Direct. So Middle Man Depot Lists and Detailed Procedure \$1.00 Hark n. Box 241 Lawndale, California. WE Pay \$3 10 lb. dried. Grow Mushrooms Celtar shed and outdoors. Spare. full time, year round We have 25 000 customers Pres Book Washington Mushform Ind Dept 101, 2954 Admiral Way, Scattle, Wash

MAKE Money at Home! Schd stamped, sed-addressed envelope New-Era, R-1. Bux 795. Melbourne 8, Florida.

CAMERA Profits - Shows Trated and Proven Money Makers, Given Names and Addresses of Markets that Purchase almost any Type of Photon Rush \$1.00, Roussess, Box 125 Oardner Mass.

PREE "\$5.000-\$45.000; Unlimited Vacations," Work home. No merchandise equipment! Haylings-PS, Carisbed, Casif

\$60.00 WEEKLY, sparetime—easy! Home Venetian Blind Laundry Free Book, Burtt, 2434EK, Wichita 13, Kansas

MUSHROOMS Quicker, Easter, Cheaper Newest Pacta Proc. Luxorco, 541 South 19th, Newark S. N. J

THEE mushroom ploneers' Spang, Inatructions, \$1 00 Ohga, P6103, Sigakenkutatu, Japan

13 ROOKS & MAGAZINES

GOOD Lord Books 50c-81 Pres Lists Editions Dept PS Hempstead New York

WE want to buy old copies of Popular Science—any mane from period 1849 to 1815. Condition pot too important provided books are complete with no pages removed write to Box No. 300, Tuckshop, New York.

Milwaukee 18. Wis 2 Books, 20 95 Val., 23 85 Ppd

BRITISH Book Bargains Any subject Cutalog free Transbooks, Box 1-PSK, Wantagh New York

ATHELET Books, Catalogue free, Truth Seeker Co., 28 Park Row New York 8

NATIONAL Geographic Magazines 1869-1852 Anj issue, Periodical Service, Bux 663-PS Wilmington, Delaware.

BOOKHUNTERS All Subjects Send Wantel Jaker Book Service, 143 Hazelwood Drive, Westbury, New York

E. R. Butroughs, & Western Piction Bought and Sold Joseph Di Stefano. 1633 E. 24 St., Brooklyn 28 N Y

BOOKHUNTERS' Scarce Muscellaneous Books Alamitic Book Service 10 Codar, Charlestown 29 Massachusetts

1DFAL Christmas Gift Book Rockela. Missien and Space Tinte' 544 pages, beautifully nustrated in color \$4.75 Artscraft. Baldwin Maryland

JOHN Friend, Bookfirder can get the twoke you want Free Bearch Service Box 2s OPS Long Beach I Cartiornia

DISPOSAL Sale New-Used Books Including Giant Novels, 13 Diff Books, List and 40c Credit Coupon \$1 0b. Extra Special 39 Books \$2.00 only, Persil, 436 N T Ave Brooklyn 25 N Y

FIGURE Book Catalog Many Interesting Bubjecta Books Publishing Co Amitiville 36 N Y

BEPROTISM

24

PRES Illustrated Hyphotism. Selfhrohosis Catalogue. Write Hypnotist, \$121 Sumet. How wood 46P, California.

BEGINNER S Hypnosis (liquinated at 100 Mone) back Oustantee Ba (1-more School of Hypnotism, Dept. ?120, Box 6229 Bastimore 6, Maryland.

HYPNOTIZE Successfully! Learn Rasy, Past Modern Methods Compacts Laustrated Course the ading self-by, monta and Secret Nerve Pressure Technique! Guaranteed Harmiess, \$1.00 H. Fowler \$30 Draper Ave. Schenerlady 5, New York.

PREE Catalog! Hyphotism, Autobypnosis, Books, Tapes, Records, Drawet PS12-007 Ruidoso, New Mexico

TELEVISION Hypnotist Emile Franchel offers comprehensive home study course! h profilem and autosuggestion for self-! improvement. Francina was and evolutioned, Ho gadgets—no extras. \$114 Wood-man, Vazi Nuys, California

EX Ray Mand Hypnotize one glance Charanteed \$3.00, Wamsteker Box 10 Ottery, Cape South Africa

LEARN Hypnotism—our book 25 lessons in Hypnotism shows how to achieve business and social success, \$1 postpaid Satisfaction guaranteed, Books Publishing Co Amilys is 25 New York

COMPLETE 64.08 hypnotism course only 50c Free calalogs. Collins, Box 67, Appalachia, Virgir-a

MAGIC TRICKS, PERZIES, ETC

MAGIC Trick Book. Ventshing Cards illustrated entalog. 25c. Ward's, 40 E. 42nd New York 17

WORLD & finest professional magic Joker novelties, Glant 1, out aired entalog 10c Top Has Evaluation II I should

1100 NOVELTIES Jokes Tricks Gadg etc Fun Sakers H Ubers His catalog sec Jubison Smith D 423 Detroit 7

MAGICIANS, Gambiers Winnings exposed, Cards, Dice, Slot, Pinhail, Calalos 10c Bax 651 St Lucis 1 Messouth

RE the life-of the-party Join professional coined at a lub Details free Orrin, 2662 Fifbers, San Prantisco 23, Calif

ONLY for brings you mager a greatest value Drugges tarrows Cutaing 500 Truck Tri he for amaleur and professions, for policy cards eigereties with balls fully cards eigereties with apparatus fractest service to mag into ever where for over 30 years times your friends send on today Douglas Magiciand, Dept 20 Dales Texas

REVEALED! 3 Secret Amazing Self-Working Card Tricks She Regi, 6125 Augtin, Plushing 74, N. Y

HINDOO Rope Mystery and Catalog JSc florus Poets, 317 North State, Jackson Mississippi

STINKBOMBS Diagustingly potent 12 81 Free catalog. Kite, 1482 Drake. Ban Pablo, California.

BE a magiciant Large protessional catales of larget tricks 15. Ireard F 100 North Dearborn, Chicago 2, things

OO Veniriloquist, all secrets told Make money surmine friends have fun Send 25c for ratainmist of dimmies disningues etc. I miled supply Color 201 E. Michapo Bartlord City. Indiana.

TRICE Wanted 75c you figure it out Swartson 25.7 N 34 Pl Milwaukee 6 Wis

Ace Bus 142 PB Camden 1 New Jersey

E-Z Magic Catalog 25c Rasters, P.O. Box 51 No. Westport, Mass.

COMPLETELY Richards 506 Trick Maste Catalog 26c Stowall s, Wandstock, New York

"VENTRILLO" Professional Voice Thrower and Catalog 25c Box 871-P6 Ph adelohia 5

Figure | Printered Magic Hondrid Escapes | Novelties Catalog Get Yours today Heaner Famous Magician, Othkoth Wisconsin.

BENSATIONAL Magician's Wand (Vanbiles Handkerst et 25s sature fortuni ed Bex 1152 PS Philadelphia 5

STARTLING affects with professional electric magic wand. Complete \$2.95. Won-dalite, Box \$2. Cambridge, Mass.

WHOLESALE! Thirty 10c Trick Novelties \$1 001 (Profits!) \$746-EW Market, Pt 1 ade-obia 3

DOLLAR Magio Set Free with Cutaiog 25c 4462 PS Germanlown, Physicalphia

FMOKEBOMBS 25c. 7 for \$1.00. (Ter-Fific) 4441-PS Overne Philodelphia 44 COINS & CURRENCY

COIMS from Formous, Vatican, etc., plus foreign banknote. 10c with coin approvals Littleton Coin Company, Littleton S2, New Hampshire.

GET Profit and Pleasure in collecting old to na Send 10t for 56 page (linetrated coin calls on You i) he delighted at 5 it Send for it now B. Man Met I 3'4 Men! Building Fort Worth Texas Largest rare coin establishment in U.S. Latebashed 57 years.

COIN Magazine, 160 pages, Sample 35c Numismatic, 7330 Milwaukee, Chicago 3.

WHOLESALE Coins for dealers, investors, Lists 10c Al Johnson But 35, Colorado Springs, Colo

COMPLETE United States corp bargain lists, Indianhead cent, 10c Economy Sales. 134-2 Dean, Manafield, Manaschutetts

COMMEMORATIVE Naif Dallar Uncirculated \$1 00. Bargain Lists Prec. Sayers. 1000 Unaka. Johnson City Tennessee [

13 DIFFERENT Indian Head or Latereta Centa \$1 00. Feierstein, 67-38 108 St., Porest Hills 75, N T

MORGAN Dollars, 1872-87-29-30-2) \$2.00 ca. Catalogue 25c. Shuffs. Salt Lake City 19, Utah.

12 DIFFERENT Indian Cents, and Coin List only \$1 00. Pounds, Box 2313, North Walse, Pennsylvania

1 BARBER half, quarter, dime Liberty nicke, Add Head cent \$2.00 Big catalog tree Joras a Box 38, Shouns Tenn,

LINCOLN Indian Cents and dates, 1972-D Cent and complete pricelest Soc. Penny Mart CK-10. Box 620, Chicago 80

MEXICAN Count Free Bargain List Sprand Box 164 Alemo Texas

BOOK listing all U.S. coims and prices paid \$1.00 Pustpaid Clordon & Coin & Supply Condon Building 1673 Mt Diable 5.02 Lateretts Canfornia

INDIAN Cent plus Barrain Liste tor Huschingm's, Box 4747, Philadelphia 34, Penna.

BOOK Collecting Coins 15c Cash, Joseph Coffin, 1183 Broadway, New York 1, New York

BARGAINE-Beautitul Complete Uncircuinted Beta (In De Laxe Roiders) 1857
Come 30 95 Jefferson Nukele 136 50
Roiderell Dimes \$17 50 Franklin 51
\$16 50 General MacArbur \$3 55 Treand a
Atomain 8, 50 25 Different Lidian Centa
\$1 95 \$5 Gold \$1, 95 \$10 Gold \$22 95 \$20
Gold \$43 95 Guidebook \$, 75 \$2 Page Hargain Catalogue \$1 06 Gree with \$ 0 90 Or
dert Fast Bertice Betes a, 6314 North
30th Omaha 11 Rebpaska

SAN Francisco Mint Closed Made only cents and dines in 1933. In short supply and great demand. One each brilliant as oir plated for 25c. Free com luts with order Bryson Cuin Company \$13 White. Toledo 3. Ohio

PROOF Sets 194" set orly \$2.50 1956-24 00 .955-24 00 1956-2" of 1953-4 2 00 1953-520 00 .951-533 00 1950-542 00 Complete sets 1950-1957 inclusive-\$120 00 Postpaid, prompt shipment, Money-back guarantee Dan s-Dan Muraika ANA 432 8 23rd Avenue, San Francisco 21, California

BRLGIUM, Switzerland, Austria, Mexico a Coina 10c Jolie Coina, Roslyn Heathta N Y

STI VER Dollars Uncirculated 1880o through 1885o 8/ 50 each 1893cc 215 00 Retail luts 18c. Holden a, Garwin, Iowa.

to DIFFERENT Better Foreign Coins Including some Older some Larger Pieces . at 00 Free Catalog. Alfred Stego. Hos 187, ' Jackson Heights 72 New York

LARGE Cent \$1 00. 12 Indian Cents \$1 00 6 Liberty Nickels \$1 00. 2c Piece 50c R&M Coin Co., Box 5, Delanco, New Jer-

OFR Million Dollars Confederate Money in \$10 s \$20 s \$30 s \$100 s etc only \$2.00 Limit four million for only \$10.00 Best Valum Company Dept. M-150. 601 Market Street. Newark New Jersey LINCOLN Cents 1918-S, 1912-S, 1921-S 1923-S, 1924-S ad for \$2.00. Gauser's Box 14615. Los Angeles M. California

STAMP COLLECTING

TWO \$5.00 US stamps plus 20 different, 10c with US approvals. Irwin Stamp Co., Bux 1:00 Brooklyn 30, New York

AMAZINO Offer 200 U.S. stampa-incod g commemoratives airmana high de emina's a to 3,00 orly 10c to Apprivat Applicanta' Il natrated Bargain Loss free Mys ic Stamp Co Dept 55, Camden New York

U.S. Classics-Over 50 Yes Old 15 Se et ed old imera. Minera in higgest collection of At 15 at less than it each. 100 to he approvad. Jaro. Box 246-P. New York 5.

ICELAND 10 different beautiful stamps for oil, y .0 cm to to approvate Oid Colony Stamp Co., Dept. B. Milford, Conc.

UNITED States commemorative collection in acting 33 different life Approvals. White, \$16-W Avenue L. Brooklyn 30. New York

WE.ND Diamond Shape Coffee Stamps.
Love y Flower Triangle! Plast American
big commemorative. Greenland Ido: Danc
et vic Free with approvem Capital
Stamp Co. Perrysburg 10. Michigan

10,000 DIFFERENT 11-re each! Build baggers connect on an fast as you like Start Now! Free de ails Happert 1872 E. 18th Street Brook.ya 28. New York

"WOW!" 138 All Different Commany 10c Sig collection includes old Zeppe-1 to Semi-Postale, Alrmail, High Values, Glant and Midget-stred Stamps Ex ta Complete bargs o rateurs from book'et Augrovale Jamestown Stamp Company Dept A12PSC Jamestown, New York.

225 STAMPS For only 1001 This mammoth value includes Airma is. Pictor als stamps from strangs Countries estal quing up to 25c each! Also Approvals. Mrstic Stamp Company, Camden 33. N Y

PREE: 187 British Colory Stamps Additions. from Bri son's tarfising Colorwal emerge Catalog value \$2.56 Free Stamp Magazine App ovals Send too for hand a Act from Magaza Stamp Co., St. Ca bering a 73 Outario

ABE Lincoln" Olant Diamond, reinbow colored Fing Set, Israel, South Morea, 30 others different, only 10c. Approvals Champlain Company, Isla La Moite, Vermont.

WORLDWIDE So all different absolute y ree, just to it troduce our incomparable approvals. Kent Stamp Company, GPO Box 87 Brooksyn M Y

PREE Packet * Anguin, Amorea Mongolin Repai Pasestine Pasconstant Approvnat Cotal Bun 7005, Ludiano, Mismi 38, Plorida.

COLLECTION Monaco stamps featuring Wedd a of Princesa Grade Ke y a so-Presidents Eisenhower Lincoln, Washington Roosevelt & others. Only 10c to introduce approvals. Littleton Stamp Company, Littleton B3, New Hampshire.

506 DIFFERENT world wide stamps only 50c with approvals. Littleton Stamp Company Littleton T2. New Hampshire.

1956 U.S. illustrated catalogue free Stone, 193 Washington, Boston S. Massachusetts

AUSTRALIA, Pifty Different, 10c with Approvals, S. M. (280, 739 Pomona, El Cerrito & California

FREE Amazing List! Alphabetical! Two-Pret Long! Biampmart, Hartford 1, Conn.

PRES. Cliant catalog offering thousands of bargains. Sent with beautiful approvals. Jamestown Stamp Company, Dept. E12PSC Jamestown, New York

U.S. Commemoratives, Beautiful Colonials Atms a Topicals 35 with approvals having Bristoit, Canton Center Connecticut.

OLD scarce U S seconds on approva-Signizy detective bargain pr es Hearn feld Chrisophil Statum Newsch S. N. J.

L'BERIA Beautiful set of four native flowers, priced at 60c in Standard Catalog only 10c, Approvals, Gollath Company Bethiehem F2, New Hampshire

TERRIFIC Stamp Bargain' Israel Irela di Vatican Assortingati plus evotic tratagne set Also fabuncan British Colonia, Accamu'ation Plus large stamp book - All four offers free Bend 100 to cover postage Empire Stamp Corp., Dept. PR. Turnnio, Canada.

TRIRTY Year Stock! United States Canada Collections on Apor val. Enclose 10c. Peterson, 405 Empire Bank. St Paul Mills

7 Plati Stamps- 26 others in Approvals. Beliwoods, Box 8067 Phila. 14. Person

EXCHANGE foreign Commemoratives and Protories for U.S. precincelle Also exchange precincelle Palmer 500 Donoring Endangeling Ladyana.

DIAMOND Roosevelt Pope Triangle. Greenistick Angles, \$1 others, \$6 Approvals, Longhorn Box 2068F Lubbook, Texas

113 MIXED U.S. unity 100 to 'Gold Nurcet Approvat' applicantal Nothing like them Kessel s. Box 61.6 Tucson Artsons

TEN Israel Free! Popular Priced At tractive Approvats Accompany Nymedi Box 503 Booki Missasippi

POPE Triangle!! Olympic Triangle! Timor, Greenland, 28 others. Sc Approvals Iroquois. Box 849 Lage Forest United

ELBE wastet 'checkful of valuable stamps. Dime. Kenstamps, El Cajon, Calif.

SEND two dimes for the best U.S. catalogue you have ever received. New-Way Starup, Lawrence, Mass

FREE-Stalin Glant "Itun Curtash" Set Approvasa Seminoies, Dayton Tennessee

SUPERIOR worldwide mission missione Amazina variety. Had poured \$1.00 peak-paid thay November 43464 Hervard, Monigreal 20 Canada

PREE' Mystery Packet with Approv-

REST Buy Today! 1000 Different Worldwide Stamps \$1.00. Universal, Box 5. Kenoaha 4. Wisconsin.

DEALERS Wholesale ration Postage be Prairieso, 5632 Queensbury Ballimura 15. Maryand

MYNTERIOUS Orient! Free packet with our saiding conorful theapenable approval; Tropicana, Bun 574-6 Oakand Park. Florids

US Stamps, O.ant Bargain Catalog Loc Raymax, 26-VX Metden Lane, NYC 36

TRIANGLES, Rounrelt, Sports Israel, Topicals Free with Attractive, Popular Approvait, Syramia, Bux 192 (Tamiami) Miami 44 Fiorida.

Olant Stamp Zoo Fron' States Loopards Hittmorros Zabu. Kos abear and other force Jurgle brasis Approvata Send too for handling Free starp magazine Lincoln Stamp Co., St. Catherine a 118. Quiano

100 DIFFERENT Stamps 10c with approvate Smith, 500U Brooks. College 64a-

PREE everything Pree-Mammoth collection cataloguing \$20.00 also 60 valuable complete sets 54 Gigar tic matterner Commemoratives All valuames Scott a International Admina. catalogues, even Master Global Admina Free when you buy our sepantional foreign approvals Bargain Stamps, Rediands California.

FIRST Day Cover approvals? Valuable atrmail cover free with first enlection. Morre Coopersburg, Pa.

PORRIGH Statups on Approval to to for Perton, 1218 Grandview Pittaburgh 11 Pa

ECYPT 25 Different 3c Postage, approvals, Bettet Stamps, Hazel Park, Mich.

i AND 2 Cent Approvale in Envelopes. Schnoebeists. Columbians, Ohio. FRPE Blustrated Prime Catalog of Stamps, Albums, Mixtures, Parkets, Adventures, Buck and, Connecticut.

PENNY Approvals Jammed with Bargains. For better values, try Putnam Slamp Compacy Mahops. New York

ECONOMICAL 15-3c Approvals, 33,000 varieties, Dressl, Box 128-T, West Englewood, New Jersey

300 PERUVIAN & stamp \$1 00 bill Bongiovanni, Gremiot 416, Lime, Peru

BORNEO, Catcos, Fultiland, Marta, Seychelies, Free? Fascinating, Inexpensive Approvals Accompany Marford, Box 48, Queens Village 28 New York.

40 000 VARIETIES Available on approvals 4c upwards Keigwin, Box 833D. Day-

GIANT Approvad Thousands Different to said 20 cm. Whit's Samp Exchange 1006K Fattaget Chicago II II

BRITISH Colonies 100 Different 10c. also Free Albuma, Cataloga for Purchasing Approvals Coast, F.O. 2187M, Santa Ana. California.

FREF Monaro Wedding Set With Pack et Approvata Universal, Bux 6. Kenoalis 6 Wishouth

QUALITY Mixiture). All Different 1 000 World Wide \$2 00 250 U S \$3 00, 100 Communicatives \$1 00 Meely Stamp Exchange Box \$4. Newton \$5. Mass

BLIGARIA Fifty Different Earting Print as Admala Floriers Trucks This Valuable Collection Just 15 cents with Approvant R Charles Boger P O Box 151 North Water Penns

PREE Surprise Assortment 30 Different World Wide With Attractive Approvaus Popular Prices Batther Box 66 A Fart Forest, Il India

PREE surprise packet? Request approvals Souther, 1361 Tutuller Memphis 7,

Commences ves 25c No approvate Reidenberg Appleton, Wisconsin

Free San Marino Morambique Crechoniceatio Australia Argentica Approvala May But 884-U Coral Cables 34 Florida

100 POREION 30 U S Commemoratives, 10c Approvad. Weckerling 1304D Choquette Austin 5 Trans

100 OLD U.S. Stamps between 1961 and 1915 # 00 Rousen Stamps, \$1 Chestnut, Managed Otto

800 MIKED U.S. Various Linux 25c Munjar Fairmount Cincinnett 14 Obio

1500 STAMPS II 50 Good variety On and off paper World wide Mann pic ferials No approvals follow Satisfaction sustained Whesen, 1435 First Are Oakland I. California

ONE Pound General Poreign Stamp Militure 22:50 Velerun Pratik Strakes 222 Market St. Perth Ambuy New Jersey

MONACO Holy Your Issue Free World Approvals Williams, Diamond, Pszinsyl-Talifa

PREE Packet Beautiful Pictorial British Colomais Approvals & Handling Murrays, 1929 Rademacher Detroit 2 Mich

180 DIFFERENT Austria 10c Approvals Irving Aronson Box P Newton Centre 50 Massachusetts

QUALITY Approvals At 2c Each Radrian, 22 East 28th, New York City 16

180 DIFFERENT China 10c with Approvals Plymouth, Dupl. A-1, Bels. California

WORLD 5 Smallest and strangest stamps only 16c with Approvals. Pinney Box 35 El Monte California

16 DIPPERENT Animals Free Bargain Approvals Water R D 7, Sox 332 Glenridge Road, Schemetady 2, New York

WONDERFUL Offer Seven complete mint sets only 10c with approvals, Notch (820), 1933 Lawrence, Chicago 40.

1000's STAMPS Free with Purchases Details! Stamp Farm, Outord, Wis

2,121 16 WORLDWIDE Catalogues
357 .2 Dol az McDonalds, Route 3 284.
Austin 5, Texas

EXTRAORDINARY Antarette Set free with approximate Postage approximated a Variety Startus Box 38 B Newton High-lands 61 Mass

Fith Sample' I justrated informative interesting National Stamp News, Anderson South Carolina

UNITED States Catalog Free! Balley S'am a 45 Bromfield, Boston & Massa-rousetta

FREE Node Collection, Stamps Picturbiq Nodes Free Approvata Homogometer 2412 Pernwood San Jose 7 Camfort in

173 DIFFERENT 10c including African Queens, Approvals, Krent 1 96-8 Nebisaks, Orlando, Plotida

but do your contect on systems for y rourtry by country Only 500 weekly. Free setails L. O Ware Stepney 70, Conn.

OLD US Pamous Americans, Plags, Presidents Commemots are approvate part of 1 to 1 and ling Metions as Samps. Box 3132M. Jackson Reights, N.)

CANADA .00 different ISC with beigelin approxima K B Homes London Canada

SELECTED Approvals USA. Colonies. Continents, Ars. 10% off December only P & H Stamps, P.O. Box 3816, Los Angeles 4. Calif.

IRRAEL, 16 Different Free Approvals Chippews, Box 458, Doylestown Onto.

FREE, Your choice Genuine Seabotte or Starfish with Approvais British Empire U.S., General Poreign, Jeans Stam, a 43 Evergreen Road, North Port Mysrs, Florida.

MYSTERY Bug Stamp Collection, 10s with U.S. and Foreign App train Hall Company F.O. Sex 51 Definition Objection

HEROES of Paraguay mint set of fourteen a amount on Certa with next approvate Proof sharing past John Schuster Jr 301 Sandpiper Plays Det Key Caldernia

U.S. Dargain 101 Different including 26 commemoratives, with superior approvals Stamus Box 37 Kennebuck Maine

66 DIFFERENT British Colonies ic. Approvals. Casto. Box 351, Dunbar, West Virginia.

\$12 DIFFERENT, 50c 1024 \$1.00 Approvate-Mignisher, 662 Jefferson, Eight II made

FREE Triangies Commutions, Sports, Arimais Monaco Piper given Approval Approval Evolut, Son 443 S Coral Carbles 34, Florida

U.S. Commemorative First Day Coret Free with Approval Arrew Stamps, Box 2575 Okiahuma City B. Okiahuma

PREE 16 Different Portuguese Colorful Inexpensive Approvals. Eshbart, Box 23 Einhart, Indiana.

25 DIFFERENT Commemoratives 1903 up 10c U S Approved E, & B. Boil W. Brooklyn 21 New York

CIVIL War patriotic commemoratives Pree Approvais. Physician Bonania, Pentungton, New Jersey

APPROVALS by countries. Robert S. Arthur 328 Third Scatter 4. Wash

& ATTRACTIVE Triangles free! with hargain approvals. Calstamps, 1666 Hamilton Avenue, San Jose, Calsfornia.

BARGAIN lists free U.S. - Poreign. Moseley 6 Hanier Downs, St. Louis IT Missouri

1.000 DIFFERENT worldwide with Approvals. Alfred Jacobson. Crompond. New York.

PREE! 100 British Empire, 10c Handling Approvals Included, Kenainston Stampt, Buffalo 13, N. Y

TRIANGLES, Animals, Birds, others, free! Exotic approvals, Baird, Box \$113, Portland T, Oregon

DECEMBER 1937 55

NAMES and Address of 124 Different English Speaking Collectors in Foreign Nations, 25s. Pyramid Sales, Box 506 Blytheville, Arkansas,

AlRMAILS Worldwide. 44 Different 35c Cat. \$2.00. Pine Reasonable Approvals Caribbean, Box 256, Shenandoah, Mami 45. Plottida.

DARKEST Africa !! Congo, Camerouns, Beychelles, Swazie, and, Tanganyika, Ur-undi, Prest Fascinating Approvals, Roy-a.ton, Box 283, Forest Hills 75, N. Y

COOKS. Indore Perak Sevensies Travalisate Tristan Pres with Approvala Country Stamp Market, Box 316, Titusville, Florida,

1 000 DIFFERENT \$1 00 with approvals Ocideo a. 4721 Eastwood, Phila. 45, Penn-\$1.25 M 792 M

US approvals. Low prices. Eagle Stamps, Romins Ave., Pittsburgh M., Petizia

1-2c EACH! Thousands of exciting Worldwide stamps Free examination. Cole, Box 223-G, Buffalo 21, N. T

1840 GREAT Britain Penny Black, Cat-a oruce \$11 00. Special, \$1 00. Approvate Brooks, 2223P Avenue X, Brooklyn 35. New Lork

PREE! Pakistan, Malia, Seychelles, Barmada, Rhodesia, Iraq; Different, inexpen-alve approvals. Mattenson, Box 245, Philadeaphas 5. Panna

UNITED States. Pine Mint Atribatio. #C7 ECS 273 ECs0 Only \$115 Approved accompany Whiten Pains. Westport 13 Connecticut

BARGAIN stamp collection only the with mexpens ve approva a Monumental, Box 2307 Builtmore 14, Maryland

PREE Pive Birolated Triangles Super Approvals. Satellite Stamps, Box 7348 Lud'ami Miami 35 Plor da

1958 U.S. Price List, 25c. Edwin s. Box 700, Rockford, Illinois

FIVE Mint Doited Nations with Approxels 10c, Brinaman, 4241 Live Oak, Arca-

SEI ROT D S. on approval. Mint, used , Kingsbury Stamps, Pairtan Vermont

US Commemoratives, 100 different, 35c. One limit, Jirka, 6607 Ravinia Drive, Tin-

MONACO Nudes" complete 25c. Approvals Royal Stamp Company, Tamagus

U.N. five different 10c, Approvais Anderson, 1112 Harrison, San Francisco 3. Callf.

ANTIQUES, NELICS & INDIAN GOODS

"ILI INOIS -- Cesandheit" For Sale Hn. dreds of Maturian Revolutionary Call war Indian Maskets Carbines, R.fre. Swords Basonets Ponder-horis, Bullet M. ids, Hila ets Cabaretts Ken-tucky R. fes Pepperbones During Pla-Ind an Maskets Carbines, 1 is Stag work h cours 50 000 Conferiors Cartridges Confederate dams \$10,000 Indian Itelies Coma Agasta Fossila Mineral Specimen Arrowheads Towns 110 000 Tar no West Barner es Mounted B ds , Studios, Dept. L. Box 13, Lancoln, Ne-Survey Der neuds Steerhords by in Wood, Bo-wood, Fronties, Gold Dollars, Phylinted Catalog 35c Heikes Wenona,

SELLING 100.000 ancient Arrowheads, Bocarbeads, Tomahawks, etc. Last free Lear's, Glenwood, Arkansas

SCALPING Enits. 3 War Arrowheads \$2.00 Catalog Pres. Arrowhead, Glenwood. Arkanssa.

30 FLINT Arrowheads \$5.00. Pine grooved fornahawk to 00. Spearhead \$1 00. Relic list 19c, Stan a. 1984 Lilley, Colum-2mA ff Ohto

MINERALS & PRECIOUS STONES

LARGEST gem and mineral magazine te is how to have profitable fun with rocks. gems, jewelry Month's \$1.00 year Sam ple 25c Gems & Minerals Dept. 8-12. Mentone California

URANJUM and Copper Minerals, 6-2) 50, 4-\$1 00 12-\$2 00 Moote Minerals.

OFMOUTTING - Silvercraft magazine Learn to cut gems make jewelry Ads give sources equipment gems for cutters col-lectors. Free literature. Sample copy 25c Lapidary Journal. Del Mar 3, California

EARTH Science - Rockhounds National Magazine Bubect ption \$2.00 fixmple 15c. But 135;-PS Chicago (10), III.

SAPPHIRE, Topas, tourmaine, garnet peridot. Five uncut gem specimena. \$1 00. Ten polished gems. Baroque shaped, \$1 00. Proc Bargain lut. lewelry, grms, profit-able easy do-il vourself projects O Brien's 1118B Wilcox Hollywood 30, Camfornia

18 COLORFUL and Basic U.S. Mineral Specimens Attractively Boxed with de-scriptive Folder, \$1.00 prepaid, included free dimesulf Bone pocket piece. Rock Haven Mineral Co., Box 135, Whitefield

URANIUM Ore Two Types, Taconite with concentrated Pollets, plus Titenium. Five Specimens \$1.00 Gemon, Sianer Avenue Sheboygen, Wisc.

MOBBLES, COLLECTING

profitable hobby Write for complete par-ticulars. Institute of American Inventors Dept. 36-E. 635-P St., H.W., Washington 4. D.C.

MAZI War Itema Listing 19c. Eingstone. 920 Third, Seattle 4, Washington

PROPAGANDA leafiets W W 11 Bampia 25c, Nazi Medals, Sadges, sample 50c Embroidered Swastika and Catalog 25c Insignia Club, Sox 31 Rockaway Park B-

WANTED Cigarette tobacco carda Write Charles Bray, East Bangor Peppa

ARMY-Navy-Marines-A.P. ulation Military belt with brain burkle plus 25 assorted medals. Bedges Campaign Ribbons. Battle Stars. Patches. Ratings etc. All for \$1.00 Supreme Military, Dept. PS. 48 West 27 St. New York

BIO Ball strong waved lines thread like grandlather used for meading lest ler heavy labric plants canvas, etc Send \$1 00 Cash name address to Linen Thread. Liept St. 2 O Box 1230, Paleison, New Jetsey

MILITARY ministures U.S. Marines American Revi. thus Civil War Custer a Cava ry Hustrated Cata of the Busser Ministures Dept. E. 40 Move Street Quiter 60. Mass.

OLLECTORS Mutchbook covers 100 Different unused \$1.00 Catalog 25c, Album \$2.00, Charles Science, 1711-7 East \$4 Cleveland 3. Ohio

PHOTO PINISHING, PHOTOCOPIES, ET

13 EXPOSURE Rolls, 39c, Jumbo prints. Guaranteed work, one day service Lincoln

PARTICULAR? # Jumbos-40c 13-50c Special, 25mm, 16 exposures \$1.25 Intro. Offer Plash Poto, Box 36H, Brooklyn 4,

3 DAY Service on Beautiful Personalized Christmas Cards from your photo or negative. Write for free sample and informallen Lincoln Studios, Dept. L. Ben 13. Limee in Nebr

4-HOUR service on defuxe jumbo prints B-Exposure rail developed and 8 ambo prints 40c 12 exposure 55c 16 exposure 70c 35 mm 20 exposure 75c 36 exposure Jumbo Deckledge Repri to to each Contact prints made if spectied Bay Photo Service. P O Box 210. Oakland. California.

FREE 5x7 introductory enlargement with roll. Pinest quality Jumbo dated prints in handy super pake 8 exposures 35c 12 55c Complete color processing. Big Discounts! Write Globe Photo, Dept. PS, Box 3504, St Paul Minuesota

33A COLOR PHOTO FINISHING

KODACHROME Processing Direct Kodal Service Estachrome-Anacochrome Processing \$1.00 Write for Prices Na-Lunal Culor Corporation Bus 12156E Northeide Allanta Georgia

33 MOTION PICTURES, SLIDES SOUND EQUIPMENT

MOVIE Camera Plim 8 mm roll \$1.54, 16mm 100' \$3.00 Pree processing Better Frims, 742 New Lots, Brooklyn, N Y

Guaranteed-fresh color blew movie film! 2mm, 15mm. Pres catagog Esc-H, 47th Holly, Kansas City 12, Mo.

PHEE catalog Save \$16. Fresh Sum. 16mm B&W and color Rim. Home proc-essing equipment. Superior Bulk Film Company, 442-448 No. Wells, Chicago 10

RECORDERS, RIPL Pres catalogus. Carstone, 215 E. St St., NYC 20

FREE Black)tank a big pew 1958 anis cutning new and used 16mm amin movies 2'12' count alides used 15n m sound projectors! Hargest stock in USA' Camitan acressories supplies, tool Blackhawk Films, Davenport 15, lows.

TAPE recorders, hi-2 components tapes Unusual values Free Catalog Dress or

WORLD'S Largest Plim Selection. Features, aborts, new, used. Castle, Ordelal. I sum stient sound Free bargain by le-tin a series size Pretiess Camers, 415B Lexington Avenue. New York 17

COLOR Sides—Movies Catalog and Transparency 10c, Eddings, § Roberts, Corning N Y Corning N

16MM Sound Features \$15.00, Shorts \$3.00 Bedner 5300 So. Taiman, Ch.rago.

FREE Catalogues \$ 000 3-1834M Plans. International Plans. Oregovale New York.

MICHICIAN color slides. Pres catalog Hawatha, Box 5678, Ypsilanti, Michigan

MMM Movies 50 R. \$1 00 Special Offer An mais. Cartoons, Travel, Comedies Send \$1 00 Movieland Films Inc., 19121-8 Sherman Way, Van Nuys, Cartiornie

34 CAMERAS, PHOTO SUPPLIES

PREE: FREE! Send for your new 52 page Photographic Bargain Book Over 5 000 new and used items at huge cavings For your Proc Bargain Book, write to Dept. 4113, Central Camera Co., Chicago

KODAK. Bell-Rowell Discounts to 40% Photo Equipment, Appliances, Free Catalog, Matiers Mari, Box 125-PS3, Pelham

MUSICAL INSTRUMENTS. SONG WRITERS & RECORDS

WANTED! Forms for musical settings Write Songwriters' Service, Clifton, M. J.

POEMS Wanted For New Songs. Send Poems, Free Examination, Immediate Consideration Songcrafters, 2714 Arcade Station, Nashville Tennessee

SOAGPORMS and lyrice wanted Mali to TinPan Alley, Inc., 1650 Broadway, New York 19 N. Y

SONGWRITERS! Protect your ideas! Hold all poems, songs! Write for safe, correct procedure! Song Service, Dept. PS. 56th, New York 12.

NEW Songwriters Songpoets share \$32 milian di lara Bearly. Any authori songa, poems resided conjugated, pob steel, pro-mited by sargest firm information ap-praisa. Free from Nordyke Music Publishers, 6000 Sunset, Hollywood 28PS, Call-

POZMS wanted for new songs Send poems. Immediate consideration Crown Music Company, 48-P West 12 Street, New York City

ACCORDIONS—Direct from importersave 50% and motel Free trial Lifetime guarantee Trades accepted Free Column Wrig Accordion Man lacturers Outlet Dept 127P 2003 Cancago, Chicago 22

Hillites on Somewriting \$7.00- Music With ray Course \$5.00 Complete Music Service for Amateur Songwisters—Jerry Colonna, Bog \$60 Burbank, Calif

ACCORDIONS Wholesale-10 day trial Pres Catalog, American Accordion Center 4328-PS-12, Belmont, Chicago

ELECTRIC Guitars, amphibres, wholesale. Pres catalog. Curvin, PSM, Covina California

VIOLINMAKERS supplies. Free Catalog 305 W Pourth. Los Auguss 13. Calif

DUSCOUNTS Instruments Accessories. National Brands Tempo Music, 37 Cutler New London (u.n.

RADIO TELEVISION REPULES & EARLIPMENT

TV Sets-18 to 21"-\$13 up, catalog available others, Surplus Appliances, RFD 2 Abele Park, Putnam Valley, New York

PREE! Glant Bergale Catalog Traitsister Sun" Radios Eits. Portables Audeo Electronics. Photographic Opt 5 Total Reselved Write Leaf or 1815 Everett Ave Chelsen Massachusette

CitYSTAL- Hadio experimenters Wr to to Huiel. 200 Hope. Lakewood New Jersey

CHYSTAL Radio kit \$1.00. pressembled -\$1.25 phine \$1.75 calardid Created Crestal Company, 2966 North 4th, Miltacked 12 Wisconsin

Ti ANSISTOR Portable Radio X t \$18.98 C O.D., Literature, Ameriaha, 471 Clifton Ave., Newstr 4, New Jersey

KITS Shortwave Radio 33 50-Improved Crystal Radio 75c Albance, 2656 60th Brooklyn 4, New York

TRANSISTOR Eits, parts. Free information, Transit, Son 15-E7, Alden Manor,

TUBES, top quality, new boxed, savings 100 - compare quality and prices transmitting, special purpose tubes, write Bell Lectrons a 40 Caral New York C I 2

AT BUNINESS OPPORTUNITIES

OPERATE profitable mail order bust hers. Write Walter Service, 4159-B Esst 112th, Cieveland 5. Ohio

PRFE Fodo \$5.000 \$45.000 Ci united Vars on His merchand se en pine ? I there we was a some-spare-time https://doi.org/10.000/10.0000/10.0000 Ca I

BREFIT Rare Trops at Fish at home Earn B & M. ee' Learn betrets' He p * 1 h see derm d Amas g thousand. Free Pair Trops at Fish B. eeders, Lon August St. Calif.

PIK Typewriters inexpensive home course true so Factory Secreta Price Book-let Write, Typewriter, Tacentum 3, Pennsylvan 4

WHOLESALE—Get the big merchandise-furniture, appliances. TV's, clothing tools, auto accessories—must anything Save half Literature Free Associated Wholesalers Service, 1914-C Starr, Burlington, lows

PRUBIT Plating Outfile for plating articles in the bone and shop. No tanks arresses to fact the Pres particulars. Quametal Cu-Ave. E. Decatur, Illinois

870 WEERIY Home, spare time Samp's ed man buckkeeping to med ate an none-teap! Auditak, 34737D, Las Angeles 34

11 000 NEW Prospects Daily Baby record books, aboes, albums. Sell mailorder Use our literature. Write, Mo-Co-Ro. Capitols, California.

OROW Expensive Herbs for Unt Blg Profit Home Business of your own. Year around profitmity We supply everything necessary! Bend for Free Amazing Fa to and Revealing Plan. National Revb change. Dept. DR. Gardena. California. YOUR envelopes addressed accurately reasonably Past service. We have capable addressers in your city Glenway System, Box 8568, Cleveland 1 Ohto.

MARE Entre Money Cash commissions Everybody bure easy to sell Advertising Book Matches Union label Big variety - U amour Cirl Scritce R Hollies Power house celling hit bree Steady repeat business. No experience necessary Superior Match Company Dept PX-1257 7420 6 Greenwood, Chicago 19.

LEARN Photo-Negative (Portrait) retouching Men. Women 55 hour possible spare of full time at home Fast grant order Paul details sept Free Dural, 180 Booth Vermont Los Angeles 6

YOUR Own name brand business No insestment no inventory Part time or full time Beal (amous brands of apol) ances housesares silvers are radio vacuum cleaters lampe tools care's values peners etc etc over lampites a Join thousands of successful independent dealers hend for Prec estaine and dealers hend for Prec estaine and dealers are list R B Dusts Corp. Dept. 44, 145 W 15 St., New York City

PLATE Baby Shoes, jewelry, gifts, brouge and refused pearl. Pres Booklet, Anderson 11020 South Varmont Los Anposes 44

HOME Import Mail Order Business Import prohibie items below who cease Experience and product investment quaderestate Pass space time Famous world trader guides you Free lat 15" imports details Melanger G48C Los Angeles 24

ELECTRONIC Plating Equipment Another Students Additions for the New Forthogon market Babs blue Metal and Equipment Supplies Free Catalog Holl word Bronze Surply Deal Bu 1604 East Park Lee America 31 California

HOW to Start a Business booklet sent Free If you Know any Trade go into business for versions Learn the Feats steps to follow We've guided 5 000 others to success, Revealing Pres Booklet yours for the asking! Write Mational Business Consultant. Office DR, Los Angess 41 Calandi in

MAIL Order--advertising agency executive reveals semuational no-risk advertisind and mer handles methods. Start in office or home--minimum capital—positive profile. Free details, Impact 13407 Prospect Ave., Dept. 2-12. Cleveland 15, Ohio

BUY Wholesniet Over 10 000 Nationally Advertised Products, Appliances Cameraa Sport na Cauchy Housewares Wast ex Tomariters Town Cotting et Send Posts and Today Box-Rite Hou 258, Hawstroome 3, New Jersey

FIRFE Catalog Contains hundreds of free for 10 most resea faires and brome properties does on a linear state of the Canada Rose in the People of and Joseph Dear direct with 20% El Seroncera 1 1 B year Direct 1668 H 1 LEARN State Of the Paul Los Angeles 27 Cant Hott 252-E

PREE Pader How To Make \$1,000 Year's San close Backward. Raining Earlywords Ontherro-th, Crear Hail Texas

BLY at Who seems Prices Tremerators has the React to friends reactions ever one at Big Profits L. rections received ever one at Big Profits L. rections received to a factor and a factor a factor and a factor a factor and a f

\$250 WEEK reported! Free book '505 Odd Successful Businesses." Work home! Fyert something Odd: Pacific-36C Occapilde, California.

tishow a living Maniature Porest of orchard only in her high, that bears that, it, I get at home Learn amain a Duarf dig so rela No sationa, Fascinating hisb \$5555 Home Manness On sortaints I so Delain Minature Nurseises Dept DR. Gardena, California LET Me Sell Your Products Nationally I'll Send You Free Information On Row To Establish Spacet me Paul Time Pasetraft Business You Build! We Sell Everything Supplied. Abarat, 207-WE Sunset, Las Angeles 17

BECOME Tax Consultant Graduates earn to \$3 506 avery tax season preparing returns evenings. State approved Union Institute, Hoboken 1F New Jersey

1000 BRED Mink-Booklet, plans 25c. Lake Ontario Ranch, Gravel Road, Webster, M. Y

VALUABLE Distributorable Throughout United States With exceptional high rate of samulas A buildess established over 30 years with 200,000 users. Investment as 500 \$12,500 Box 1457 ,501 Bully New York.

FOU can Make Money at home in spars time tak (ij magazine renews) subscripfacts No ramta, or experies a recessary A supplies full taked Write Today Me-Gregor Magazine Agency, Dept. 130, Mount Morra Limois

56 NEW Home-Business Ideas" Booklet, sample Free. Spray exotic Valvet-Huede of anything. Floribraft-Dit. Los Augrees 61

CANDIED Poppers and Potato Chip Equipment, Sakins, Box \$23-E7, Springfield, Ohio.

SHINE Cats Without "Polish" New inrention. Lightning selier Cara gleam like mirror Samples sent on trial Kristee 114. Akron. Ohio

MAKE Perfumes, Products. Write for Free Laterature Specialty Manufacturers Supply 239 Ideal Way, Charlotte J. N. C

MARCE Money Taking Orders on Leading State Braud Tools No Investory to Carry 8, 000 000 00 stock to Draw On Proble up to 30 send \$1.00 for Grant Was leade Catagog \$1.00 hefunded First Pure ase US Supply Dept 201, 6 146 Church Street, New York 7, New York

BUY Wholesale direct! Save 50-80%. Free Shipping Catalog 250. Bierlein Industries, Inc., 342 McLean Ave., Highland Park 2, Michigan

PREE Franchise Profit Letter" deactives nation unde og portunities Farinsire distributorships, demerations agency operations. Write today National Franchise Reports 33 North Micrigan Chicago 1

WE Manufacture Leather specialties suitable for direct mail saling also salesmen, Jobbers, retainers, Escapies \$3.00. Paul Lund, Box 756, Elmits, N. Y.

PAMOUS S licon Wateriess Buttery Exclusive Distributorship now available most areas Factory-scaled, guaranteed troubleiree for 10 years. Investment for merchandisc on a Termel data post of solds its Post facetime. Wateriess Buttery. Dept. 203 El Segundo Camborhia.

LEARN Mailorder Selling Pays Big! El-Hott 252-B Gainsborg, Toronto S, Canada.

NATURAL, Molding Rubber; Extra Thick Free Bample, W Wooley, 1916-B Donnid; Peorla, Illinois.

LIQUID Rubber Make flexible molds. Free Sample Country, 1907-C East Rd., Jacksonville 11 Fla

OPPORTUNITY to earn \$15.000-\$20,000 and pally Franchise protected Granted on \$12,500 basis. I we at home. No merchandre in but Selectified One of most the salve and tail sampet the Bushicases in United States at a Canada Send for free expansation bank at Harrels and Company But \$-11 amount in I amount

piete Lane busers of Mink Farm, Supersor \$ 65 Wissonian.

VENDING Machines—No Selling Operate A Boute of Coin Machines And Rara Amazota Profile 32-Page Catalog Pres. Perkway his bine C rioration Dept 18, 715 Ensor Street. Baltimore 2 Maryland.

\$250 WEEK cleaning venetian blinds. Palented Machinery Free literature, Robinton, 7213A, Indianapolis 1, Indiana.

UMIQUELY different' Profitable mailorder opportunities galore? Powerful advertising copy? Revealing information' Craft, 2006 So. 18th. France 25. Cast

HOME Business Digest, World a oldest | Mai, Order and Home business magazine Bample copy 35c, Miller Publications, 3848 Wallworth Dr. Totedo 12, Ohio.

KASY money taking orders. Send \$1.00 how for your catalog instructions. \$3.00 merchandise certificate included. Specialies Unlimited, 2003D East Lancaster Fort Worth. Texas

METALIZE Baby Shoes, Repair Do is Rebuild Batteries, Catalogue '75 Ideas Pres. Universal, Box 1876-S. Puorta Intnosa

Pierk Literature-Make By Motes Rate of Pishworms and Crickets. Carter Farm. Plaine, Oa.

CYPREMS Knees \$5.00 Dosen. Up. Deta: s. Otopie's Giftwares, DeLeon Springs Fig. ids.

INTERESTED IN Mail Order? Investigate Facta Bet re Pur pe No Pin a No Schegger Fun and For Information Finters Box 6302-B. Albuquerque, New Mexico

TO \$100.00 week v. Sparet mr. home opstated mr. other but each No. castal. Begic er v. plan. Everything supplied Louis 10426 C. Mational, Los Angeles 34

MAKE New Greaseless Doughnuts In K tiber Se stores Free recipes S Kor 2008 South 15th Mannespeak Mannespea

CASH from Sampast (seventy methods I have set methods I have a perhaps of the set of the company of the set of

PLANTERCHAPT molds bigued rubber plantern flenke rander supp in Cata & at d mattus free Jaylands Plantern Blue Rupids Kansas

toe". PROFIT No Investment Stamp brings details, samples. Moser, Box 264 Brooken L. New York

MAKE fiexible molds. Cast plaques, figurines. Pres sample, Tooker, 1945-A Pairview Hamilton Ohio.

BELL Books by mail, 400's Profit, Royal, Box 168-M, Cleveland 27, Oblo.

POOL Proof? The amazing Method that makes all fortunes Write Ideal Industries, 1496-W Monros, Chicago 7, 15

\$30 00 DAILY Possible, everything included for orly \$1 00 Robert Leonard Bayard Nebraska

PLOCKON New Profitable Pascinating and to beautify Anything Christman Trees, decorations, automobiles, signs, tota Everything Pot business of pleasure \$15.00 Hourly earnings. Your estisfaction guaranteed, Send for material and complete nairs from Special 7:17 ductors Offer \$3.00. United Flockon Company, \$20 Taunton Avenue, Beekonk Massachusetts

CLIP valuable newspaper stema Hundreds worth 35c to 85 00 Steady income. Darco. Box 484, Muncie, Itsl.

WR Pay 43 10 ib. dried. Grow Mushrooms. Celler, shed and outdoors. Spare. full time, year round. We have 25 000 runtomers. Pres Book. Washington Mushroom Ind. Dept. 176, 2054 Admiral Way, Seattle, Wash.

READ Mainteler Laws and Regula-Mons and Mainteler Ruse for Segmners" Learn about Necessary downers different taxes, legal requirements, etc Both books, \$2.00 Tasker 1803 Peach Street, Alexandria, Virginia.

\$250.00 WEEK spare time profit possible Earn at home with new 'sactuating Printing method \$6 starts you send no money now Free Confiden is: Facts and Valuable Samples Screen Print, DR. Los Angeles \$1

MAKE strong sawdust or earther, boards. Build attractive freproof houses 200; profit Exclusive territory Boys Laboratory, Oklahoma City 8.

MASTER fractions for \$60% profit on \$11.00 c. rs then Habited that a draft ran phase one at home \$100 m heread may be \$ 500 re'n ideas Over at La hawarm Industries, Weimme, Oregon

HUT ar heat you, area or ne's burn atores wholesale retail, sample \$1.00 tinsal saied, money back. Alvin Richards, 248 S. Eschange St. Paul Z. M. on

Write . series this H Se, moure Fund do Lac Wis

\$68.00 WEEKLY sparetime easy! Rome Venetian Brind Loundry Free Book Burtt. 2444ET Wichita 13 Kataan

THEY Hand him \$100 Fire Pricart Berret Journal P.S service plants Work home Publics MJ Openiade Call

MAKE SI to 85 hour ope of me of home Sharpen hand band eve a seas for a seas for home he dware a new to the a lac over No expensive weded us h machine actor of Fites has five him over my quick each returns. Free book shows how to start. Charles C. Foley Co., Columbia Heights. Mixin

PIANO Turning learned quickly at home Tremendous field! Munical knowledge unnecessary Information from Empire School of Piano Turing Champaign Library (Populated 1915)

COLOROLAZED Concrete pottery grade without moids Patented method, Crimeter's products, morettes, files Basement was well for Money-making projects Booker de a sizee Men on a Na as Potteries transfer Rapids Manney's

NY Direct From Factores Appliances Cameras Walt on Free detail Cam Company, 68:0PS-20th Ave., Brooklyn 6, New York

HEWEST Products Report included in Hisma Business Digest", oldest Ma. Driver Magazine waste and Makey Opportuit for the Park the sample cups M. R. Brima ou publisher #16 M. Capuga &t. Phace. Men York

BUY Wholess of Appliances topic watches sule accessive etc. H so discounts to the United Witnessalers, 1206-16 Breadway New York 1 M Y

MAKE Money Sharpen Carhide Tools and Drills, "Do it Yourself" in your base-torn? or as age with New Patented Carlo or as age with New Patented Carlo of the Diamond Wheel it and ed Fine Diamond Fr sh gets has ness But a ready row a pick up and decret Car' has was of your own Machine used by targest companies. Plugs into any light cutuit, weight 108 lbs., themp to operate Write for i ee natruction book prions and terr tury DTCs. But 22, South Haven Mich.

ABUNDAVITA Meshs Suger Bank Bal ances-Better Living Campo 10. B. Grand. Long Beach 14. California

MAKE Big Money in Maslorder Write-Histand, Box 182A, Hatfield Pa

M"*NRCHOMS Quicker Easier Chesper Breest Parts Pres Lithuaco, 641 South 19th Newark 1 N J

EVERYMONY Likes Candy Make professionally home (Or 15th Year) Ragadale Candles East Orange N J

READ Mallorder Treasure Chest Absolute > Free Tasker 1882 Peach Street, Alexandria Virga in

RET \$50 000 a year at home Plans from

kinds do A Morth Distributing VX & Restores Cure Battery Life Wanted by m one Proven terrific seller Proc Kit National Dynamics des T Lexington Ave. Hew York 11 K Y

LIQUID Murble—Building Compositions Compositor Mad Potters Statunry Ties Wals Cottings Particulars free Marhieting Bervice, Edwardstate, Linnols

MAKE \$46 From Equary Pool Picwood Jupan hermany From Details. Woudarts. Reservator Mass

100' PROFIT Mailing needed automotive product Laircraft. But T-1000 Detroit 15. Michigas. ADDRESS and hall our sagesetters Good profits. Amazing plan. Strandgard Mail 3622 Washington Blvd., Chicago 24. Illinois.

FREE Plans—Profitable Spare-Time Mome Enterprises, Blog BI-FSA, Des Plaines, Bhnois

GROW Orchide at home. Profitable, insspecial upon tempera are and human and thous withdo need. Pres Fun dete is Or hide 146 & between Los Ar

MONEY MAKING OPPORTENITIES

NULL Tranta Genu fat mote brancht than diamords Cutake for Diamonte 2420-8 7th Outland & California

BLY Wholesam 30 to Discout a Appliances, Gifts, Typewriters, Tools, Watches, Sporting Goods, Jewelry, Cameras, Housewares, etc. Consolidated Distributure Cufton 11 New Jever)

HOMEWORKERS! Write for exciting details converning Addressing and Mailing Temple Co., Muncie 7, Indiana

DE ECTIVES With home Travel Experiors while means. Detective Palts is are free Write Wagner, P.13a West both New York 26

Man Women Start Money-Making Plastic Laminating Business at home in spare time. Material that costs lie brings back \$3.58 No canvassing or se ling but mail orders bring in \$20 a day, Write for full particulars free. Hush name on postered to Warner, Room Classel, 1513 Jares Chicago 24, listnots

MONEY Plaza! Secret Journal Cira due l'es du chtere made 22 300 filst monti Work house Publico-NL Crestade, California.

sizes so MONTHLY Proved! find homes, farms, businesses of termites, rodents peats flow short at methods Learn even thing two weeks? Pres success plan A P.C & G., Depl. 2D, 428 South Western Los Angeles & California

NOTTEST Mad Order Finn Ever! Sell photos flora att novelties Huge proven profits Prov Details! Ampro, Dept 2D 425 South Western, Las Angeles 5, Califort a

START Big-Pay husiness at home in the cutter to enterior e medded to open a cutter take too ma hims or brock in half of particulars free. Send postcard to Mason, 1812 Jarvis, Moom CM-3-L, Chicago 26. Hitmos.

MAKE Money Writing Short Paradrama No tedious study I let you used to wide where and how to see, and supply last of editors buring from heg aners. Many sman thecks add up gatch. Wite to see right anny Bend for free falls Betisco Barrett, Dept. C-86-80, 3464 Clark Chicago M.

sice of WEEKLY spars room. Rates redworms sottless way Odorless Charlie Morgan, Box 1160, Bushnell, Florida

MRN and women wanted to start home but ness to space time with after table-top runter stamp mad? He Rang to sart up to \$6.00 an hour without previous experience. Pad particula a Free by mad Send postcard to Hoterta, 1512 Jarvie, Room CR 3-L. Chicago 26, Editois.

SPARKTIME Report Profits Taking Magnator Subarri, tions, Special Offers Cassell Agency Buyblun Beach 7 Piorida

MANUE 63 300 yearly aparetime raising mank chinchi as nutria etc Fron booklet reveas or sed plans. Write Pura 500 Mt. Piessant Road, Toronto 2 Catada

TERMITE Control Brings Big Income and Lifewing Security Profession at Methods Bring Income Within 2 Weeks Pres Details Meritral Dept. 3, 231 17th St. Bakersheid Cauffornia.

AMAZING successes through franchises' Bec the exclusive franchise hoster year territory information rushed National Franchise Reports. 223 Forth Michigan, Chicago 1

MAKE Money, Impression with Personal Checkwriter Refundable Sample \$10.25 Belapot, MF Broadway, New York City

RECEIVE samples job money opporbusines informative literature \$1.00 Dru-A.'s, 4621 Homerice. East Chicago Indiana,

DOLLARS Every Day! Amazing Magic Matlorder Plan. Setup Prec. Mailer, Son 568-A. Oshkosh Waxonsin

5000 BIG Mans. -Only-\$1 00. Heyer 34-1) Raven, Levitlown 31, New York

CHARACTER Analysis, Free Brochure DeWildre Lucas, 24.9 Sunset Los Angeles

IN 1852 I was unemployed, had little money Today I am retared Will help an -one get started absolutely free. N Core 217 48th Street West, Bradenton, Florida

Tape Recorder Fabricus new business E. tre constry wide open Record wed disas parties sports events atcreophoric sound sound on about malpie re ordings Make radio commercials sound of the glamorous business of Tape Recording Moneymaking Pacts Free Dixteland Publishers, Asheboro & North Carotical

VENDING Machinas—No Selling Operels A Route of Coin Machines and Earn Amazing Profits 12 Page Catalog Free Parkway Machine Corporation, Dept 19 7,5 Ensor Street Baltimore 2 Maryland

PROGRESS for you who are interested in mail order business. Whether a begin ner or experiented Succeed with your ideas and our ga dance Let us prove it Write The Progress Company 430 West Anaheim Street Long Beach 13. Castler nia Established 1941

PREE Literature—Make Big Money Raising Pia worms and Crickets. Carter Farm-it Piatos. Oa

EARN 45 00 hour sharpening Twin Free Circu ar Masone, JJ70 N 5J Miswaukee 16 Win

PREC Book 506 Odd Successful Bust peties Work Home Pacific-15c Ocean-side Casti

WE Pay \$1 50 ib draed Grow Mushrooms Cellar shed and outdoors Suste full lime year round We have 25 000 customers. Prec Book Washington Mushroom Ind., Dept. 170, 2054 Admiral Way Seattle. Wash.

BUY Wholess & Save 86 7 3 100 000
Name Bra d App. a ces Housewares
Cothing Furniture, Took, Sporting Goods
—Everything! Pres Catalogs, Disstrations!
National Buyers Service. Box 2338FB San
Francisco

\$36-\$300 WEEKLY plating baby shoes making costume lewelry, novellies, etc. Details free, Jo-Ca Electropiater, 7840 A Northwest Sixth Court, Minmi 50, Florida

235-8100 WEEKLY In Spare Time! Ten Proven Ways only \$1.00 Homework, 4505 Harriet, Minneapolus 9. Minn

MAKE Money Addressing) Literature explaining, free, Cove, Box 2866-L, Greensboro, N. C.

\$15 000 PROFIT in One Year Possible on \$5 00 cash and just 3 brust after ion weekly Experience unnecessary Fabulous but true Proof complete detailed Plan only \$1 00-assurate of or religid Counting Enterprises, \$203-8 Orubb Road, Silver Spring Maryland.

m.meographing Write: Mossile Misseo, Bonham, Texas

PREPARE Income Tax Returns at home; spare time. 65 00-\$10.00 per hour Simplis: Sed instructions Its a honey Particulars free Reynard, Box 1255-H Peoria L.

\$60.00 WEEK! Y sparetime easy' Nome Vene ah B od Laundry Free Book Burtt 1434EU Wichila 13, Kansas

MAILORDER magazine chuck full of money making offers, opportunities, copy 25c. Lewis, 1418 thatey E. St. Louis, Ill

OPERATE, Profitable mail order business, everything furnished Unneversal Trades, Box 5516, Chicago 10, Illinois

PREE Polio, '85 005-345 005' Unlimited Vata toms No merchandus Unknown' Work home-sparetime! Raylings-S16 Carlsbad Calif

PREE Manufacturing licenses (bousands price ess pate) ed intentions. Your choice Gustanteed. Patent Abs ract Series. da a 11 00. Bods Kare. 1123 Chaparral. Cotpus Christi 4. Texas.

\$6000-\$60 000 OR More Possible Become Pinancially Independent. Convincing Detailed Plan. Send \$2.00. Baugh. 1514 "P" Street, Sacramento 14, Calif

\$25.00 TO \$10.00 weekly addressing envetopes. Our instructions show you how National, 1815 Meyers. Lombard Is most

MAKE Money Clipping Newspaper Reins Por Publishers' Complete plan. Newscraft, PS 94.1 E. Main. Culumbus 5. Ohio.

Mt-SHROOMS Quicker, Easter, Cheaper Newest Pacts Free, Auxoroo, 643 South 19th, Newark 3, M. J

I Earn Big Money While Asleep! Neighbors think I struck Oil! They we hunted my hig secret 0 years. Not another actions but legitimate, wound properties excite handled by anyone Nothing line it! No selling Send \$1.00 (refundable) Orani. Oraniham. Pa

Free Details George Lucas, Bellevue 3 Washington.

OPERATE profitable mailorder business! | Prec dela a Thomas Bond, 1637-N West Vernon Phoenia Arizona

\$10-200 WEEKLY Sparetime, addressing emerges at home Instructions \$1.00 retundable. Reiss, 210 Fifth Ave., Suite \$102-100 New York 10

PACTS About Earn Money At Home Schemes You Should Know About Hav Partridge. New City Rockland County M V

LEARN high paying newspaper trade at home. Write to Thomas Smith, P.O. Son S-3987, Sarasota, Florida.

100% PROPIT Multing needed automolive product Letreraft. Box O-5008. Detroit 25 Michigan

40 MONEY Muking Idens Vikari. 460 Jed Ave. Balt Lake City 3. Utah.

38A BUY IT WHOLESALE

BUY Whotesale Over 10 000 Nationally Advertised Products Apphances Cameras Sporting Goods Housewares Watches Typewriters Tools Couthing etc Send Post and Today Buy Rite. Box 258 Hawthorne 8. New Jersey

BIO Multicolor Wholesale Catalog! Housewater appliances coulding saver-wate, cookwate auguste binoculars in dios, phonographs, cameras, recorders, projectors to switters, shavers, sporting goods, toys, tools, newing machines, watches jewelry Name brands Hage discounts Postcard, Sechyco, Decatur 175 Lamois

WHOLESALE' genuine diamond Rings Jewery Distributors, Box 1962 Medion New York

SOOKS Wholesale—Directory of 150 Sources \$, 00 Damel's, 267 Prederick Huntington, Indiana

BIO Discounts Apphances. Cookware and Tableware Sets Jewelly Mathemally Known, Pinest Quality Brands Savainction Guaranteed Send for Pres Cata og Jhal Enterprises. P.O. Box 144 Gianta South Carolica

Brands Cata og 21 00 Refundable Vikssi 466 Ird Avenue Salt Lake City 3. Utah

LAPGEST Wholesale Supply Source In U.S. Get 22 free catalogs Purpliance clothing appliances, autos and acressonies farm equipment tools housewares hobby supplies Pree details Associated Wholesalers, Box 52-C Burlington, lows

SEND for free Wholesaie catalog Tools.
Machinery Gas stoves Binoculars Vacuum cleaners Sewing machines, etc. Nation
Wide Distributors, P.O. Box 42, Statisford
Coop.

BUY Wholesate? Appliances, tools watches, auto accessories, etc. Huge discounts United Wholesaters, 1265-P Broadway New York I, N. Y

ELECTRIC Unitars ampiders, wholesale Free cataiog Carvin, PSW Cuvina, Carifornia

BUY Who exact Nationally Advertised General Methandise Appliances Sporting Goods Jewery Watches Tools, Radios. Cameras Typewriters 106 Page Causing and 24 Page Christmas Supplement \$1 Refundable Pirst Order Keystone Industries, [31] Morse Avenue Chicago, Illinois.

124-PAGE Wholesale Catalog! Discounts to 80 BTS Products, Oakland 217-20. New Jerse:

WHOLESALE Catalogi Discounts to 04% Famous Housewares, jewe ry appliances etc Plus Home Mailarder Business Or portunity Ford, 1838—21st. Ogden, Utah

DIAMONDS Flaviers, full cut, Registered Mounted Discounted Write House of Matshall, Lyons 18, New York

D. PORMULAS, PLANS, ETC.

PORMULAS—All kinds Latest products Literature free Kemico, Park R.dge 15, 111

PREE, Large formula Catalog. Analysis concentrate Western Chemical. Salem Ora-

LATE Modern Manufacturing Pormulas List Pres Chemical Service Martville, New York

INVESTMENT Plan Quaranteed—monev back Intesting \$200.00 in 1950 would have made \$5700.00, \$200.00 in 1951 would have made \$ 500 Plans \$3.00 No COD 6 La Joie 239 Flatbush Haztford 6. Conn

MODERN Pormulas for the best in fast selling big profit products Eye-opening distrature free Milier Chemist 1917-8 Tamps Florids.

ANY Formula \$3.00 Catalog - Manufacturing Treatise for J Bellori, 193 N Clark, Chicago i

• PLASTICS

LEARN Finitics Patriculion For spare time income Low cost home training now available. Write for free booklet Interstate Training Service, Dept. D-2, Portland 18, Oreson.

WEW Liquid Casting Plantic clear colors. Sended reas fluwers, coins, photos. New Manual shows fine thing you can make at home and seal at big profits Send 25c Castolite, Dept P-192, Woodstock, Librols

LAMINATING Supplies. Price List Free Solomson 44 Combill Boston & Mass

PLEXIOLAS — Any thickness — Clear Colon Cut to lire—Clear Rods—Tubing, McClarin Plantics, P.O. Box 166B, Hanover Pennsylva.us

LEARN Plastics at Home C'implete Kit \$5.98 Dime brings Sample Plastic Three Experiments Full Delia in Plastic Projects, Box 5 Detroit 24. Mich

40 CASTING Materials, 1 000 Ideas Cat-

L CHEMISTRY & PHYSICS

CHEMICALS Mighest Quality in Small Quantities Chemical & Apparatus Kits for Home Experimenting Calaing 25c. 25th Year John H. Winn Co. Inc., 124P West 23 Street New York 11 N. Y.

12.1.USTRATED Catalog Chemistry mineratogy biology 15c Tracey Laboratories, Evansian Illinois.

SPECTROSCOPE Por Quick Analysis 63 00 Cuttingson 26378 Arastradero, Los Altos, Cabi

EXPERIMENTERS Bargains Catalog. | 25c (Refundable). Hagenuw Laboratories. 2414 Clarks, Manistowoc, Wisconsin.

CHEMICALS and apparatus for industrial, analytical and private laboratories. Catalog 25c Dept. M-25. Biological Supply Co., 1176 Mt. Hope Ave., Rochester 20. N Y

AMAZING New Book of Science. Experiments, Formulas, and Catalog of Laboratory supplies. Only 25c. National Scientific Co., Dept. PS-12 500 West Road. Lombard Hilmon

10 PACK Bouldets Beginners Clementer Chemistry Plans Readle to Lag I Astronomy Free tricity Finding Useful Tables Boseniffe Odd ties (O. Each, Franks 2131 South Racing, Chicago 8

CHEMICALS, Supplies Catalog, 25c Laboratory Sales Son 1st H. Brighton, Mars.

43 HEAD WANTED REPORTS

FREE Information Earn High pay All trades Foreign and USA Job Opportunation. Travel paid Applications, Write Dept Set. Natural recommendation, 1839 Broad, Newark, N. J.

JOBS Galore-Big Pay in fabulous booting Southern California. Classifieds 11 Box 1231A, Sherman Outs, California

WANT work in Washington? Particulars free agenderson 170 lemple Visings. Assistantes A. et al.

COPYRIGITED Reports on best paving jobs with stave and enture produce none Carata at them, aristops abapture factors unture appearant them are taperature factors unture appearant tent of the state and unable of foreign and state and appearant for them is designed. Only 6: 00 for 3 armata) in adding remains to advance tent advance tent appearant of the state at a state to the state at a state to the state and the death. Ame a set opportunities and turband after the state but here are opportunities and turband after the state but here is an opportunities. Set when the state but here is an opportunities and turband after the state but here is an opportunities.

JOBS Overseas, Janseck Development Co., 100 Hub Station, New York 55, New York

BOOMING Veneruels—Only hours from the States. New data regarding Johs, On portunities. Conditions, etc. Bainries in Lobo in 1819 to tax exems. Bingers Long Alona area extra first hand only direct \$2.00 \$2.22 Air Married Cherks or Money Orders only Paul B 67 th A artado 172, Maracatho Labadina, Venetter a

PICKUDA S becoming Bundreds of jobs Statewide operated in min we job particular to a surfaced \$2.00 Sun top Service Bureau, Perry 15 Fairble.

"FOREIGN, Alaskan, USA Jobs" To \$1.500 Monthly! Million Americans Employed Overseas. Copyrighted Reports Who to Cuntact for Highest Paying Jobs Laborers -Trades Drivers Office -Fngi-heers—Many Others 52 Countries—New Misgara Project Booming West — Lath. America—Spain—Rurope—All Conlinents Registration Advicts Service Ap, to a Him Forms. Unconditional Money-back Ouaranteel \$2 00 (Airmailed \$2 25), (COD's Accepted.) International Reporter, St. Louis 1 SA Missourt

COMING To California? Choice listings. Jobs, housings, business opportunities. San Prancisco, Los Angeles + San Diego, 15 Page Booklet Money-1998 guarantee. 11 00 Ches.evs., 3077% Texas St., San Diego 4 Cauf

64 POPULAR SCIENCE

IS AGENTS WANTED

YOUR own business Suits \$1.50 Overroats 15c Ma. Linaws 25c Shore 12'c Ladies' Coats 30c, Dresses 15c, Enormous profits Catalog Free Nathan Portnoy Associates, 605-J West 12th Place, Chicago 7

AGENTS-200 profit selling genuine gold window letters stores and offices Pres samples Metallic Sign Letter Co. 1217-E West Newport, Chicago

START Your Own Business On Credit Your own book 1527 Dealers sold \$5 000 to \$32 000 in 1956. We supply stocks equipment on credit, 200 home pecessities 3- as experience at necessary. Please it profitable business backed by world adde at duality. Write Rangelgies, Dept. L. U. Pot. Freezect 11s. one

NFW John open in selling. Berd name address for five free labors of Opportunity Managers is money making guide disting hordreds of tanger ies who does not also fail of tall time. No experience headed Opportunity 850 N. Deathern Dout 18 Chango Lithout

EVERTY man a prospect. Request free sales at showing line of belt buckles, induction led with customer a name and sunfaction as a cap badyes for trucking bus has police a timer Chapte who en hier a it of Past Box 1825PN Providence his sigla and

GOLD or Silver letters, numbers, Windows, Doors, Trucks If to 6" 500"; Profile Free Samples Atlan U 349 West 19th, Chicago 20

MONEY-Making Opportunity! Take big profit orders for world famous Patented Varieties Fruit Trees. Also Plowering Shrubs, Roses, Vincs. Big Sales outfit For Stark Bru a 1988 10168 Louisiana Museout!

60 , PROFIT On Competer Persons returns to advertised By I must Commute pay 60 . Mass 625-day upi Hire others for free samples, delails, write Studio Cirl, Olendale California, Dept. (1912G)

"FOO-Stop" Windshield Cloth Instantly removes blurry Mist Frost Siret Snow Stops windshield forging Samples and on it at Manutes to Aktion Obio

FREE Samples Bestifful Fustber Pictures. Sylvisi. Apartado 8036, Mexico I

BUY 800 000 articles direct from manufacturers the world over at lowest prices Make up to 1000 - profit Free Literature Glass Etiwood City 11. Pa.

CALENDARS. Advertising Novelties Matches. All styles, including Religious Yes wheel 12 sheet Girls. Hundreds of Advertising Novelties. Block Matches etc. Printing Cale day Co. Printing and 12 styles. Advertising College Grove, Chicago 37 Lil.

COMEDY Cards! Ninety Samples. \$1 00 Sebastian. 1094-P Hamiin, North Rollywood. California

STRANGE "Dry" Window Cleaner Sells like wild. Replaces meany rage, liquids homply glide over glass Samples sent on trial Eristee 73, Akron. Onlo

WILL you wear new suits and topconts without one penny cost and agree to show them to friends? You can make up to \$10 00 in a day even if mare time without anymaking blong Field 3th wouth Il roop Sirect Dept S-826 Chicago 1 Il incid

Bt ILD yourse I a profitable bretime but tess select full line top quantly paint products used in owners of hores stores factories, institutions, etc. Large sales big earnings. No investment, delivered or constitute appetence out line not essent in Rated firms buy on open account, you get full credit for repeat orders. Commissed the checks malled weekly. Lang established firm, top rating in D&B fixtersize the sold only on factory-to-user basis through direct representatives, if interested write now in confidence to J C Cougin. Sales Mgr., P.O. Box 325. Evans-ville Ind and

BUSINESS of your own. Earling polential as high as \$40,000 primary larged in 6.2 500 base. Ho merchand se to his send for free explanatory booklet. Harrel! & Campany. But 6 DD Louisville. Li

EARN \$10,000 Yearly—only two nales daily World's Best Seiler, The Holy Bible (Highwated) Protestant or Catholic, Marsareta s. P.O. Box \$2. Hazriton 6. Pa

KASY handwork makes fast-selling articles. Sample free Summade Company. Spotkton 64 Massachuse is

1 206 p PROPIT on \$1.50 Item! Darce. 17 Jefferson, Providence \$, R I

SCHOOL Seniors, Be Popular With Classmates Have Spending Money Galore De als Pres. Craftcards, Box 335-M. Pittaburgh 19. Petton.

NYWEST Cigarette Lighters—Sales Int 2 Samples—\$1.50. Lewjon's, 1948 Woodward, Topeka, Kansas

\$1.00 PROFIT selling \$2.05 photo enargement offer Allen Studio. Reigier Bids Little Rock Arkanias

SEAUTIFUL Feather Pictures: Free Details, Sample 20c Stamps, Apartado 1868, Mexico 1 D F

Repairs Cata Ba fee Life Wanted by the Man Prince True Service Free Kit National Documes 656-H Lexington Ave New York of N. N.

14 HIGH-GHADE BALKSMEN

MAKE Est a Morey Cash communished Ever code buse cash to see. Adve thing Both Matches United Labo Big variet Galbour Carle S exact 10 bit on Powerh, use setting k Free Scendy repeat the less Mr. excettebre recessors Superior Match Common v Dept P-1267 7530 S. Greenwood, Chicago 13

BIG Moneymaking Opportunity Exclusive line uniforms, jackets, pants, shirts coveralls, sportweap Advertising embroidered Every mainess prospect. Oct Saling Outit Pres! Master Co., Dept. D. 14, Lagonier Indiana.

AMAZING Guaranteed Battery Reviver Renews old batteries, sample \$1.00. Free details Criss Products July Presistord Ave., Philadelphia 25, Pa

My Pree Outh! Puts you in a Pine Busness Just I cast orders a day brings you up to \$800 ext a a math in Big Money show his ness! Complete line of Air Chaplon shoes for men, women. Rush postured for your powerful Pres Selling Outh!! Mason, Chippewa Palls 18, Wisconsin.

3 KUCCATRINAL & INSTRUCTION

USED Correspondence Courses and Books sold and rented Money back guarantee Catalog free (Courses Bought) Lee Mountain, Piesah Alabama

RR a Real Potate Bloker Study at More White the Pres book today (cl. apprised Weaver School of Real Estate 20,8R Grand Kanana City Mo.

COMPLETE Your Righ School at home in space time with 10 near old tolers. Tests f rousted No coases to lone in formation book of feet American School Dept. 2546. Dressel at 58th, Chicago 37, Hillinds.

MTUDY For Instorm degree of Pay hospore Metaob of a and Inn. in Corresponding to the courses of Colone of Inch he Metaon and Inc. 2 P. S. abia North Ind. committee in the contract of the con

EARN While You Learn Auto and Diesel Mechanics. Master this top paying frade Many graduates earn \$100 a week and ap Approved for Korean veterans. For free information write Dept. N. 201 Nas. ville Auto-Diesel College, Bashville 3, Tenn.

HIGH School diploma at home. Licensed leachers. Approved materials Southern States Academy, Box 5744-PK, Station E, Atlanta, Georgia.

WANT a Diesel Joh? New Opportunities to increase income Righer Pay, More Money We can help you Qualify Tools Shop method home tracing Write toda Diesel Tractor Heavy Equipment Dission Interview Turing Service. Dev. B 3. Portland 13, Oregon

YOU For president of collection agency We have he sed hundreds got their tames on their doors Frankin Credit Hosnots

PIANO Tuning pays. Big moner in spare time. Learn at home in 30 days. No musical knowledge necessary Phonograph, records tools and instructions furnished. Personal instructions available, Free catalog Capital Tuning School. 2100 S.W. 16th Court, Fort Lauderdale. Plotids.

ENGINEERING Degrees carned through Rome Study Pacific I ternational Ur verbity operating as a Conlege of Engineering only at present 5.19 A Santa Motica Boussard, Hours and M. Cantorina

"RARN While Asleep! Details Free, Research Association, Box 510 K. Omaha

SOOKEEPERS: Increase your earn ings! Operate your own samplified Dollar-A-Week" Bookkeeping and Tax Service. Pull or spare time, Detain Pres. No obligation. Elin Box 203, Cedar Grove North Caronina.

PRACTICAL suggestions for successful job hunting 18 page brochure, 25c Independent Publisher, Box 1106, Atlanta Georgia.

HOW To Train Hotses - A book ever one who thes horses amound have Free No obligation Simply address Beer School of Hotsemanship Dept 5812 Persoant Hall Obse

IT S Fun learning a anguage by Lingua phone. Morid a Standard Conternational Meta of Al home out by easily learn to apeak French Somethic Certical Japanese Russian Modern or eet your choice of 34 asignates in a size a lag to arcaber counting Complete recorded courses on Free Trial Set & Linguage Root don't have and details. No objustion. Try don't buy! Linguagehone Institute T-54-127 Radio City New York.

SIMPLIFIED analytics teach airebra clearly-42, guaranteed, I-6123 Orchard Dearborn Mi tean

1MPROVE your singular Valuable explanatory thesis \$1.00 pertonid Address Cramer, P.O. Box 2002, Generals 1, Caditotics

HOW to Write short stories, invateries articles. Learn at home for career of extra part-time income. Earn while tears ig R F Wenderoth sold first story for t so Professional writers show you how Send today for free lesson and book Palmer Institute of Authorship, Deak UM 127 1886 N Sycamore, Hollywood 18, Calif

MEN manted age 18 to 45 to train to Be deen Estimators & Contrators at he me in space time Big pay specification. Write the Pres brack are American Techo at Secrety 450 E 58th by Dept PS 1257 Characo 37 Elipois

OWN Collection agency office. Pays big Prec details Frankish Credit. Rounoke ? Virginia

WATCHMAKING Jenely, Home Stud Courses Greatest Dear Watchening In attitute, Culver City, Colifornia

LEARN 'By Ear' with Dormlohone While you slamber the amusing new scientific invention to the for you Revolution ary Dorm, him to the for you Revolution to learning all fusces refrect some himself in the standard for the same himself that has been to children be est the effort because in dechi does be est the day for law paints thought be been to the for law paints. Free Book No obligation Maderbuphings Inc. 321-127 Merz. Radio City New York 20.

WELDERS care big money. Easy to learn Arc.—Cas.—Automatic Welding New equipment, low cost training in non-profit what (if A sproved Free Book et Hobert Welding School Box P-1271 Teo. Ohio

MATHEMATICS Correspondence courses, UCSM, 6605 North Thirteenth Street, Philadelphia 26, Pennsylvania.

BOOKS, Free General Catalog, 100 pages Text variations educational instructions, subjects Millions of treaties new and used Bargain prices Backs bought Est 1907 Long's College Book College PS. Columbus 1, Ohio

EARN Degree Free bulletin, Homestudy only, Midwestern Bible School, 1969 Broadripple, Indishapolis EARN College Degrees, Currespondence Metropouten University Box 86, Grendale Car fornia.

A Dynamic Singing and Speaking Votos can be yours! Self Training records. Thrilling octable! Canfield, 2018-C Fifth Avenue South. Minneapods 4 Minnesota

MASTER Watchmaking at home. Free sample leason Chicago School, 2328-WW Milwaukee, Chicago 47

WE Pay \$3.50 ib. dried. Oraw Mushrooms Cellar shed and outdoors Spare full time, year round. We have \$5.000 untomers Pres Book Washington Mushroom Ind. Dept. 100 2054 Admiral Way Seattle. Wash

PINISH Righ School at home, spare time No classes, Diploma awarded Write his Pres catalog, Wayne School, Catalog HBA-71, 2327 Sheffind, Chicago 14

HELP respect to abundant living Our contines have nided a udents to eacher to enter to enter the entires Learn degrees Pall Mall Write to tree book College of Universal Truth Correspondence Hebbool), 33-K E. Jackson, Chicago

HYPNOSIS Unawares" Influence others while the weep Complete instructions by Pl D 45 00 Satisfaction guaranteed Wade Hampton 1120 Micheltorena, Los Augeles 26, California

LEARN Real Estate—Study at home Send for free catalogue. Midwest School of Real Estate. 68 Forth Chicago Street Junet Throops

COMPORTABLE Living for Life! Operate visit was independent himple Business Analysis, Bookkeeping, Tax Service Full of Spare Time, Details Free, Vander-drift, 35D Franklin, East Orange, New Jersey

SCORE high on college entrance examinations. Prepare quickly with require Cramwell practice test, only \$2.06 En-Cramwell, PSI, Adams, Mass

PREE College Education (Resident, Correspondency: Free Books, Other Oraduating Opportunities—courses or testa: Aurel Cent. of Valley New York

SALTNMEN Guaranteed increase in closures, \$1 00. Educational Sales Presentation. P.O. Box 1820-P. San Francisco. California.

LEARN Plane Turning Early At Home Our Graduates lead field. Our 60th year Prec Booklet Niles Bryant School Dep' 8 Jill Stockton Bird Sacramet to 20 California

Pitrateal Therapy and Massage Rome. Training Practice printed or work with doctors and hospitals Free Cubeliness Vational Institute Box 4 158 R. Ontario Chingo I moss

WANT US Clos to Job' Many open Now \$724 5377 plus hig really increases. Men Women 16 58 Experience often unnecessary Prepare New' Training until apmin ted Free booklet shows jobs sauries cample coaching. Write Frankin Installate Dept R 22 Rochester R Y

CONTESTS

WIN contest money General Contest Bulletin gives hundreds of tips Lists current contests rules Fample magazine 23c (seneral Contests, 1609-A East 5th, Duh.th Mintesota

DETECTIVES

SECRET Service Fingerprint Training at Home in Scarr Time Write Associated Special Investigators, 46 Princess, Saint John, N.B., Canada,

DETECTIVE Training Philips Secret Service System, 1917-C North Kenneth. Chicago 39 III

LEARN Civil and criminal accept gatten at I me Earn steads good pay Institute Applied Science 1930 Sunnyside, Dept 319 Chicago 40 Ili

DFTECTIVES Work home—Travel Experience understaure Detective Particulate free Write Wagoner P-125 West 86th New York 24

MEN. Women Join Crime Pighters Detals Free Write Box 434, Saint John, N.B. Canada.

HE A Detective. Write for free details. State Age. National Detective Academy, 535 East 4th Street, Box 1982, Scottsdale, Arizona.

FUSINESS SERVICE, INFORMATION, NAME LISTS

PIVE Great Books of Mall Order 'How''
how in money-saving combination offer
Free alterature Dunnell Maning Burvice,
#I 484 223 Place Bayside 44 M Y

MILLION Names State Your Needs. National, International Box 246 Twin Lakes. Wisconsts

INCOME Tax Assistance' Refunds Available (1711 o. 612 Latham, Wythewood, Propas ta na

2 ALTHOUS SERVICE

WRITERS Sook Manuscripts invited fur publication on our cooperative plan. Greenwich Book Publishers. (Alten. Mr. Ibsen: 440 Pifth Avenue, New York 17, New York

WANT Your Book Published? Learn how we publish, advertise, promote distribute Many successes Free booklet Pfl. Vantage, 120 West 21, New York.

"HOW and Where to Bell Manuscripts Send \$1 00 to Editor, Box 262E, Hollywood, Canf.

33 ADVERTISING, AGENCIES, ETC., FOR ADVERTISERS

ADVERTISE 24 words, 100 Canadian Newspapers, \$5.50 Lists Free. Advertising Bureau, 1051;-P Springfield, Chicago 43.

FAINTING, CHALK TALKS

HOW To Make Money With Simple Carlotte a A biok ever one who likes to disk should have it is five no obligation Sim, y address Cartonnata Rachanga, Dept. 1912, Pleasant Hill, Ohio

ASK for free facts about our famous carlooning course. Write Manager, Carloons-Of-The-Month, Roslyn. New York

YOU can Entertain with Chalk Talks Catalog 10c. Cartoonist Buids. Oakkoah, Wascutson

CARTOONISTS' Magazine Lessona, Markels Free Bample Cartoonists 2774 California Court, Lincoln 10, Mebraska

TYPEWRITERS & OFFICE MACHINES

TYPEWRITER Bargalta" All Makes. List free Woods Typewriters, Bedford, Pennsylvania.

4 NUBBER STAMPS & OFFICE SUPPLIES

STAMPS 4 lines \$1.00, Sations, 537 Conn. St. Gary Indiana.

INDEXED Cushioned I Lines \$2.00 4 Or 5 Lines \$1.50 - ript or Prints Free Stock Stamp Circular 1 Day Service Youngers Stamp Shop Princeton, Iowa

THREE line name and Address Metal or plastic pocket Case \$1.00. Mated Mailera Post Office Box 484. Buffalo 5. New York

THREE time name and address on cushion base most of a mount strip \$1.00 Rubber Stamp Service. 106 North Hyalt Street, Tipp City, Ohio

2 LINES \$1.00 & or 8 Lines \$1.50 Any Wording Roughsedge s. 2 Lionel Clark. New Jersey

4-5 LINE Quality Bank Endorsement Stamp 51 50 Check or Money Order No COD's lows Residents add I cross Sales Tax. Price Catalog 25c refundable. Nelsons', Box 412, Oskaloosa, Iowa.

PRINTING, MULTIGRAPHING ETC.

BUSINESS Printing, Samples, Prices Pres. Howprint, 723-W Bunios, Websige Groves 18, Missouri.

BUSINESS Printing, Rubber Stamps Pros Catalog. Bross, 196 Clerk Street, Jersey City 5, New Jersey

1.000 BUSINESS Cards, "Haised Letters" 43.50 Sumples, Ploneer, Joland Park 61, New York.

PERSONAL printing Free catalog, samples. Johnston, Box 1996, Orand Central Station, New York 17 New York

500-7% ENVELOPES 45 45; 500-7% x 10% Letterheads 54 85. Postpaid Floyd Maier Son 143 8 Dover N J

tee 4's ENVELOPES, 100 5% x 6% Storts Printed 53 to 16 Portion 53 to 16 Portion 53 to 16 Portion 53

SAVE: 1000 Business Cards \$3.00. Samples. James Printers, Washington, Georgia

DETTER rando mean business Free samples Hieddard 6166 Barton Change 61

FREE lilustrated Catalog Fostpaid printths D M Press Scharlopol California

300 Past's FOLR 'ins gummed st. hers 800 Red Hurder 81 80. Morita Printer Segimen Michigan

1000 CMBCESED Business Cards Blue Ink 54 65 L. C. Besen, 17 South 5th. Writington 28 C.

OFFICE Printing-80 50 1000 0 [42] 26 hour service Ha win Lettern 261 West 42 St. New York

ENGRAVED Wedding Appointments. Engrand Die abs, and with order 36 63 for 30 Hz et 10 us hallook Samuers \$1 to refunded after first order Large Front, Style Singer, Box 221 Skokie, Illinois.

QUALITY Printing moderately priced. Samples, Prices, Lambard, 200 West 5th. South Boston, Mass

1296" IMPRINTED Cellophane Tape (Colored) \$2.55 Namecraft, Box 13-6, Arlington 74. Mant.

TOP quality printing, mimeographing Prop literature, Currier, PSM, New Lebenon Center, New York

Free catalog Hanthurns, 638 Lindell, Payetteville, Arkansas.

PRINTING OF TEXTS,

DO your own printing Save money Simple raise We sloppy ever to as Print for others good profit Hanerd or other age engraving too Have home shop Details free Keleey Presses V. & Mer den Conn

RUBBER States making presses by draude operated electric and begind Ruses black distance operated and the material Additional States and the selecting BOI Reference Supringsold 2 Mesonally

PRINTING Presses, Type Supplies, Links & Turnbungh between Merhantenburg Pa-

MAKE Your Own self-molding rubber stamps and printing suts. Plexiculater, Argyle 3, Wasconsin.

50 PATENT ATTURNETS

INVENTORS. Learn how you can protect your invention. A specially prepared brok-let "Patent Guide for the fines the ron is thing detailed in most in other by bairs's protection and procedure together with Record of Invention form with primptly forwarded to you upon request will out obligation. We are registered to practice before the United States Patent Office and are prepared to serve out to the handling of your patent mattern Clarence A O'Brien & Harvey Jalabam Registered Patent Attoriers 778 K District National Building, Washington, D. C.

C A Snow & Co.-S-427, Snow Building Washi gion 1 D C New stered Patent Attorneys Write for information INVENTORS: Without obligation, write for inferration end among the steps you should take to see it in Patent John Rand of Registered Patent Attorney, 307 Countbian B.dg Washington I D C

INCENTION Record form free and Patent Information Every Inventor Should Have (ar) Moor Registered Patent Attorney Woodworth Building New York

INVENTORISH If you believe you have an invention, you should had out how in protect at The firm of Ministerior Berman a Davidson with offices in Washington. If C is qualified to take the necessary steps for too, head for right of our Palent E spect. How to Protect Your Investion We will also send a scan Investion Record?" form, No obligation. They are yours for the asking McMorrow, Berman & Davidson Renatered Palent Attorneys 1600 had a star Buridson Washington I D C.

INVENTORS — Take these preliminary steps toward patent protection. Sketch and describe your invention. Sign, date and have this disclosure witnessed by two people who understand your invention that as make a pre impact matern among U.A. patents already greated for size or types of invention. We report on the probable patentability of your invention and see chimetal your further course of action W. to the our instructive baseless Palent Principle to the entire that the for live tors and convenient Residence of invention, the source of invention.

Building, Washington 5, D. C.

INVENTOR'S Outle" and "Record of Invention" Itse on request, Frank B Ledermann, 154 Massau Street New York City

PATENTS Irving L. McCathran 307 McLastien Hide Washington I D C. Registered Patent Attorney

FOR ENVENTORS

INVENTORS if you have an invention for sale pair ted or impairated write in at tute of American 1 vertors Deut 384, 633 P 85 N W Washington 6 D C

INVENTORS—Bend for free Patent Information back and Investor a Record of Registered Patent Actories Associate Exampler Patent Office 1922 1829 Patent of Attorney & Advisor Main Department 1832 847 Outland Miller (FPM) Warner Building, Washington 4, D C

INVENTORS—This firm is registered to practice belore the United States Patent Office and available to so at you in the preparation and prosecution of your patent entransmittent. Patent Protection for a ventual bond of your request to take a said patent projection sent promp is done to equal the obtigation. Victor J. Event & Co. 142-P. Merlin Building Weshington 6, D. C.

DIVERTION Record form free and "Patent Information Every Inventor Should Have Car M' see Registered Patent Attorney Woolmurth Building New York

136VKNTV)RA W theat ohigation, write for information explaining the steps you should lake to secure a Patent on your it section. Joing Randoph, Registered Patent Astorney 306 Columbian Bidg., Washington 1 D C.

INVENTORS Learn Bow you can prolest your invention. A specially prepared
booker ' Patent Guide for the Inventor'
replanding defeated information concerning patent protection and procedure toseiter with Record of Invention form
wither with Record of Invention form
wither with Record of Invention form
wither with Record of Invention form
with the promptly forwarded to not special so
request without obtigut at We are negintered to practice before the United
B also Patent OF a and are prepared to
serve too to the handing of your patent
mattern Coarence A O Brief & Maille at
Jacobson Registered Patent Atturners
TEA & Dustrict National Building Washlegion D C

invention, you should find out how an invention, you should find out how to protect it The firm of McMorrow Berman is Davidson with offices in Washington. D.C. Is qualified to take the necessary steps for you Bend for rops of our Patent Booklet Blow to Protect Your Invention Record form No abiget on They are yours for the galing McMorrow Berman is Saridaen Registered Patent Attorneys, 1635 Union Buriding Washington 1, D.C.

INVENTORS! Have you good patentable ideas? Write Mr Metalars, 11 West 43md, New York.

INVENTORS Don't sell your invention Pale sed or (patented unit, you fees ve our offet, write Cowgill, Box 286 Marion, O

INVENTIONS protected without Patents. Teleservice, 202 Woodciiff Station, Morth Bersen NJ

PATENT Drawings Your Invention. 26 lwars experte as Paler t Service Assoclause. Haverhal New Hampshire

PHEE Protection Forms Readed Inventions list. Inventors Sales Office, Box 4973. Washington 4. D C

PATENT Bearches including copies of tearrest patents, \$6.00. Reports sirmalised a P in 48 yours. More than 100 registered patent attorneys use my service. For Free in teatings, protection forms write Miss Ann Hastings, P.O. Box 170, Washington 4. D. C.

PATENT Searches \$5.08. 48-hour airmail service I, vention Protection forms free. Write Patent Engineering Service. 715 14th Street. R.W., Washington S. D.C.

PATENT Scarches \$5.00. 45-bour services Free I wellton Protes but fo me White Raymond L. Smith, Patent Searcher, 426 Sheraton Building, Washington \$, D. C.

OL INVENTIONS WANTED

INVENTIONS wanted Patented unputented. Tremendous Manufacturers Lata Crother Marketing Berrice. 3439 23th, Oakland b. Cauf

INVESTORS Hundreds of manufactors on have requested our assistance in social top marketakes new products. Complete information free limits so of American Inventors Dept 30C 625 F Street, N. W. Washington 4 D. C.

INVESTIONS wanted how by my Manufacturer-Circus Patented Unpatented Write Oilbert Adams. Patent Broker, 80-R Wall Street. Pinancial District. New York City

INVENTIONS peried immediately for manufacturers For additional information write Resear Corporation 312-1W Fremont Opin

INVENTIONS Wanted Patented or Patent Priding 26 years superior of Primotity Inventions Majorial Service Business. \$122 Maramec, St. Louis 18, Mo.

INVENTORS Don't seil your invention Patented or Unpatented until you receive our offer, write Cowgill, Box 386, Marion O

SUPERIOR promotions Patented, unnateraled revent one informative houtlet five Superior 110 fel North Rodes, Neverly Main, California

CASH Buyers for inventions, Write Nalumai inventors Institute, Box 1997, Cleveland 20 Ohio

ATTENTION inventors We extend our invitation to exhibit your invention at the inrest international inventors Exhibition by a head dut) g the that Worlds Fair at it west independent of the wind wide market fact as Cor act this W.I. O'beial American Correspondent, Box 1451, Missauker I. Wisc

MANUFACTURING

NEW economical, automatic paint mig equipt. Finest formulas and knowhow free Box 108, Worthington, Indiana

64 MODELS, MODEL SUPPLIES

BRIP and yacht model fittings, blueprints Send the for Insatrated catalog 2 D tisting hundreds of Items. A J Pisher, 1982-2 Etowah Ave., Royal Oak, Michigan

SHIP Models Most complete line in New England Eits Pittings plans, books, tools, engines, motors 1850 a justicated rations line James Biline and Cu Loc Dept PS 302 Atlantas Avenue, Buston 18, Managelyanetts

LiOWEL Trains By Discounts Bulletin Free Catalog, 25c, Mark Brothers, 2041 Chicago Ave., Chicago 22

SHIP Model hits and numerous fittings from authorite plans including ellipsets, trawier fishermen frigates, privateer radio control tog etc Send 25c for our new 1857 catalog Model Shipways, Polio P. 19 West Port Lee Road, Bogota, N. J.

JUMBO Modeletast Catalogs Airplanes Boats. Cars 25c Rahroad 25c 10 000 Items Bargains List Pree Americas Hobby Center 1481, West 22nd Street New York 1, New York

PLEISCHMANN Color Catalog HO Trains and Live Steam Engines, Merabach 545 Pifth Avenue, New York 17

ROCKETEERING for model enthusiasta Model 6° rockets fired 300 or more lineapensive basic rocket allows true mode, resign Not rubber or spring powered Plans 81 50. Copyrighted Henry Maras. 37 Prospect Hamburg, M Y

SPRINGS for your workshop—30 assorted rizes Compression and extension \$2.50 value—only \$, 00 postpa d Precision Specialties In 1342 East 58th. Kanass City 10, Missouri.

WORKING Steam cogines, bosters tractors, fittings Catalog \$100. They Power Corvails Oregon

STEAM engines betters castings Catalog 25c Anton Bohabuy 2297 Price, Rahway N J

ROCKET Plans Simplified One Bollar Model Rocket Society, Deerwood Manne-

MINIATURE Engines granutes and steam Build them on your 6 or 7 lathe Light testings business fittings, ste only 10c Octure Models. PO Box 516-PB. Park Ridge, Illinois

65 HOME CRAFTSMAN

ALL Crafts, Supplies, Large Pres Cataog National Randicraft, 199 Wildam St., New York 38

FREE Do-It-Yourself" Leatherersis Catalog Tandy Leather Company, Box 791-S22, Port Worth Texas

WOODWORKING and Cabinetmak ng course for beginning and advanced home training program available Write for free booklet Interstate Training Bervice, Dept G-2, Portland 13, Oregon

AMERICA'S most complete Home Craft supply company Send 10c for big colored catalog. Glies Kendall Company, Huntaville Asabad's

MAKE yourself a better rolary power mover for test than \$20 00 using your motor . No power total needed Send \$1 00 for complete pans. Hancock, Box 754 Springdale. Conn.

LEARN Art Metalcraft and jeweiry making Complete, inexpensive, home training course now available Special tools and materials furnished. Write for free booklet. Interstate Training Service, Dept. L-2 Portland 13, Oregon

.20 PULL size Artist drawn jignaw patterns. \$1 00. Craftplans, 1322-B Wabash Chicago 5

89 JIO Saw Patterns, Beaut f., she'ves Ornaments, Noveities, Phys. Row Where to Sett." \$1 00 Mastercraft, 1245 7041 Of cott Chicago 31 Libnots

FXCLUSIVE combination tin salp. Free information, The Holly Company, 2711 N Pine Grove. Chicago 14, Illinois

PREE Cutator 2150 Artist-drawn Patterna, Designa, Craftplana, 1322-B Wahash Chicago 5

SQUAREKNOTTERS Make be a handbags in arda dog leashes etc. Special offer Beginners book on a of a dique is cord same as 250 P. C. Herwig Co. Deut 71 PT. 39 Henry St., Brooklyn I. New York

FREE Do-it-Yourself Craft Catalog Or der Now Batchelle Enterprise, Columbia 3,

STYLECRAFT Pretraced leather kills Handbags Bi folds F. igree Be to Patterns on leather Just carve assemble and lace Precaived kills so available Set d 25c for catalog free folder Refunded Set order Apache Leather Company, 2004 E. Washington St., Phoenia, Arizona.

JIGSAW Patterns 102 Pull Size Lawn, ; Novelties \$1. Barebo, O'Pailon, Mo.

KNOCKDOWN redar chest and lumber free price list Bedford Lumber Company Sheib) ville. Tennesses

HUILD Modern Kitchen Cabinels for Sale New Book How To Build Cabinets for the Modern Kitchen shows you how Only \$4.95 Send Postal for 10 Day Pree Examination Simmons Boardman Books Dept PS 30 Church Street New York 7

PREE List, power tool bargains Laircraft Box F-5008 Detroit IS Muchigan.

4 DO IT TOURSELF

MELT Cast Iron Brass, Aluminum Make castings for profit Free hierature Ursuts Burner Company Box 566-6, Tempt. Aritima.

ORANDFATHER clock movements barometers blueprints hits Wholesair Catalog 25c Mason-Suljivan, Norolon 2, Connecticut.

MARVELENS SI 00 Postpaid Send stamped addressed envelope for literature Hosm James Manuscribe K Y

TANNED Rabbit Skins 50c each Postpaid Colors Nature, White Chinchilla - Pawn Make your own Hata Mittens Tota - Jacket Linings Suppers Dress Transling Mohawk Tanning Co. Inc., Dept 11 PO Bot No. 228, Gloversville N Y

ALUMINUM Carport E.ta Build your own Details Free! Carports, Bux 3003 Shreveport, Louisiana.

RATS & Mire Get Rid of Them by Our Enetric Trap Plans Send \$1.00 C Mc Nell, 289 Lainyette Avenue Westwood, New Jersey

BUILD Electric Hand Saw Flans with photos 12 00 Wm Tools R # 5 Hox 205. H. aburo. Obto

BWIMMING Puol I can show you how to build a beautiful managers pool complete with flateration by yourself in approximately one week. Outrasteed not to leak A 10 000 gallon pool win roat \$800 00 20 000 and \$11 000 gallon pools a gillon higher Complete plans and directions \$2.00 per set Pimitco Pools Box 237 Balto 3 Maryland.

OLD GOLD JEWFLICY, WATCHES, ETC

USFD and new watches \$2 up Pree List Southern Watches, 5-PS So Wabiah Chicago 2

CONTUME Jewelry Supplies Settings. Rhinestone etc 65 page Hustrated catalog 25c Milady Box 1328 O.P.O., New York Catalog

GOLD, Silver platinum Diamonds Wasted Cash Immediately Highest Prices Appraisal Made Free Information Wilmot's 1967 Bridge N.W. Grand Ropids 4 Michigan

PREE Resurrection plant with any purchase of Old Gold Righest prices paid Resurrection Plants, 6572 Calle Cappela. Tucson, Arizona.

16 SWISS Watches \$16 00. Catalog 20c Berkwit, 1150 Castlebill, R. Y. 62

WATCHES—We Buy—Sell—Trade Free Lists. Watchmasters. Route 7 Box 331 Tucson. Arizona

SAVE up to 10% on brand new watches and Jewelry, catalog 10c. R. R. Bulber-and Arriba Colorado

a TOBACCO & PIPES

100 PIPE Cleaners 31 00 King 330 Agrander Kamloops, B C Canada

FOR THE HOME

POAM rubber furniture cushions Factory seconds 50 - discount Free cala og Perma Foam, 196-A Nye Ave Irvington New Jerset

PIRE ' Don't you burn up Christmas Day Pireproof your tree Spray with No Blaze 50c Mash, 1545 Saint Marks Brook, in 13 ASSEMBLE natural looking plastic indoor plants from kits. Free information Arjayco, 1404 Hayden. Cleveland 12. Ohio.

MAKE paint stick to meta, with Metal Treat \$1.00 bottle makes one gallon At leading hardware and paint stores of prepaid from Klean-Strip Co., P.O. Box 10084-A Memphis, Tenn

CESSPOOLS, septic tanks, outdoor tollets, cleaned decodorated without dige.ng, pumping or moving Free details Coefficcal Cesspool C raning Company, Leston 14, Massachusetts

NEW invention reclaims waste heat going up the chimiley saves 35 of oil bill Your price \$59.00 Postpaid. Retails \$189.00 Guaranteed Dealers wanted Write to Fuel-O-Matic Box 1273, Trenton N J

CANNED Walls. Not paint, but plaster, no mixing Fireproof Cover old inside walls Make them New Buy everything theap in your town Get Library ed instruction booklet \$2.00 Original Products Co. 3697 Pine St. Jacksonville. Plorida

HOOVER Constellation "Walk on Atr" Cleaner \$49.55 p.ms freight regular \$87.50. National Housewares Distributors, Box \$46, Davenport lows.

70 OF INTEREST TO WOMEN

MAKE \$25 to \$35 weekly addressing envelopes Our thatroctions reven how Olenway Eox 6568 Coverand | Objo

60. PROPIT On Cosmetics—Pamous nationally advertised Houveoud Cosmetics pay 60. Make \$25-day up. Hire others Por free samples details. Write Studio Girl (slendate California, Dept. 117,30)

WANTED At Once woman with car Would you like to earn \$35 or mure a week in jour spare time calling on house-wives in your vicinity with Rawleigh Products? Write Rawleigh's, Dept. L-790-PSC Freeport, III.

STAINLERS Steel Catalog Free Kmall Bargains Wayne Waldo Jefferson, lows.

GIART Big Mail 10c. Martin's Service, 1148E Lewson, Martineville, Va.

MAKE money addressing Samples free. Ber 8007 SE 65th, Portland, Oregon.

WE Pas \$1 50 ib dried. Grow Mashrooms Cellar shed and outdoors. Space. full time year round We save 25,000 customers Free Book Washington Musittoom Ind Dept 181 2954 Admiral Way Scuttle Wash

PREE Health Categor Premions Given Sheldon Mail Order Rt. L. Sheldon, Jowa.

EARN \$200. Month y typing sparetime! Mann Service, Box 421-C. Woodclaff Lake. N J

APOSITE 28 inch for corners 4 beautiful Christman colors \$1.50 4 for \$5.50 The Morris Den. Box 2.4. Newburyport, Mass.

11 FOR SALE MISCELLANEOUR

GIVE a personal red gift Santa Claus thous with names to your order Only 1. 25 each Send therk MO today to Wested Ceramics. Box 421 Highland New York

ZLEGANT Cigarette Holders Imported from Germany Long sum Gold colored metal with black mouth piece, Pap out spring \$1.00 delivered No C O D. Monarque Box 375 Garden Grove, Calif.

TEN large Wash Cittle for \$1.00. M and W, Box 1533. Denver 1. Colorado.

"BLAZE Out" Fire Extinguisher—Sprays 10 To 15 Feet Of Fire Quer 1 ing Pluid Special \$2 98, ideal Gifts, Maeval Manufacturing Co., Route 1, Box 500. Butler Wise

READ sludy ving down Bed'n Chair Reader hads book overhead easy page-turning Height angle adjustable. Occulists approve. \$14.50 ppd., return if dissautabled Norm Lykes Co., 302 Routs 2, Scottsdale. Aris.

REFILLS for ball pens. Writes beautifully long Fits all including Paper-Mote 8 for 3, 00 Stry R-1, Box 795, Melbourne 6. Fin Guaranteed

PREE Catalogue Eniver from Solingen German ; Write W and W Sales, 18,6 W matth Norwood 12, 19:10

RING-Valve Job while driving 14 00 Literature Mc ages Grantham 27A Pa

NEW wide-area Back Scrutcher exquiattery reserves hot cold weather 1 and garment liches 5 80 ppd 30 rm Lykes Cu and Route 2 Bc 1/4dage Ar

WAYTED TO BLT

71

SCRAP Mercury (Quicksther) containers such ted Tanta'un. To asten Scree Platfoum Meta orgical Products Company Establia ed 1808 35th & Moure 5th

TOP prices peid for old copies of Pupufar Hesen. e-speed only langua from period though cordillon is not perfect please write us and describe what you have Do not send the issue not! you hear from us Write to Box 308 Tuckalion New York

OUR ARE SEE DESIREM MINER gold Ores are seed Mercury Terminal. Nor-Wood, Massa busetts

OLD gold jewelry Rings, Coina Lan-ich a. 734 Eldred, Erie, Pennsylvania.

WEARING APPAREL

BEYSCRAPER-Heel Shoes! Photo Catalogue, \$2 00. Pinecraft, Box 642-Y Hollywood 28, Calif

TATTOOING SUPPLIES 75

TATTOOING supplies Pres estalor Spaulding & Rogers, Court St., Jackson-ville, North Carolina,

GERGER COUNTERS & TREASURE FINDERS

FIND Buried Treasure, gold and silver with Chidak a se setions 11. Its Phid-it locator, on 7 364 50 Write for free lit-erature on commete line of mineral meta-locators, Getzer and ecolicie one country a Goldak, 1866 W. Gienoska filed. Gienoska California

FIND jost or hidden treasure with new Improved metal detector No ground pick-up Also, underwater metal detector Free literature Condiner Electrician, Dept. 1 therature Cordiner Flectrinian Lordina 2543 E. Indian School Road, Pisorata

GOLD at ver metal detectors Geiger counte a for aran um Viol es Sensalo sal te formation free Detector Corp. 55.8 Vineland Ave. North Hollywood, Culf.

TREASURE Metal Mineral Detectors M.Scope Used worshwide for Treasure Nints of Geographic Proce 5.4.75 Contacted Time Parent Pan Pres Treasure Use nium information, Pres cutaing Planer nium information, Pres cutatog Planes Research Lab. Inc., Dept. C-2. Palo Auto

25 OUIDES to finding Uranium \$1 00-Occlogist, Box 271, Lancaster, California

INDICATOR Locates uranium, buried motiey minerals Price \$15.00. Dirt and ples leated free for oil. Horton's Buriace (ht Burvey, Belle Rive, Illinois

PREE Literature—Lightweight, guaran-teed Mela, Detectors Geogra Counters and Minera ghis Este and Assembled Models Electronic Applications, Dept E. Box 2. Ar tigton 10. Virginia.

WATCH REPAIRING

WATCHMAKERS Tools Materials, Supplies Watches Catalog, Gales, Box 1000. Chicago 90, Illinois.

WATCH and clock repairing books. Free estalog. North American, 2720-BN, Mt.-

WATCHMAKERS' Journal Instructions and other so, able information for watch-makers students hobbytets flample copy 30c Dean Co But 32:5-C. Devision Beach.

MINCRELANDOLS

PREE Wholesale Catalogs Sporting Homes a. es Lawtoment CAPARIBA Everyl J. Econ-O-Mart, Whippeny

BUY Wholesale' Over 10 000 Nationally Advertised Products, Appliances, Cameras Spiriting true-de Housewares, Watches Tipes for To- a Chi-bine wit Sond Pratrard T-day Buy-Rite Box 256 Haw thorne & New Jersey

AMAZING New Craft Uses Magazine Pictures to Make Decais, Print Cloth Est

TREMPNIDOUS Discounts Appriances Watches Cameras Guita Sport Huse Selections Bend Post Ing Qoods Card. Valmart, Duyer 8. New Jersey.

REND for Pres Christman Ciff Calalog Jeanne Shop, West Cultingswood & M.

SPECIAL Offer 4 Inch Bust and 6 post rards of Abraham Luicout Only \$1.00 5 Icent De Castro, \$66 W Miller Springright Library

BOOKS on antiques and their prices Free circular Warman Publishers Unionloss Peans.

ROYAL Jelly Counties. Contain Inhulous Queen Ree Rival Jery 20 00 his 16 day back I terat 'e free Api-Vitalex' Dopt. R il Hou 06'4 Da las 10. Texas

PRES Literature-Make Big Money; Basing Pinhworms and Crickets, Carter PRES Farm-12, Plains, On-

SECHETS of Successful Joke Telling Send \$1 Bady Box \$640. Minneapolis 18

TOTS 9 Mer in 10c graduations ', off J H Barnett RFD 1 Frequent Texas

WE Pur \$3.50 lb dried Otow Mush rooms Collar shed and outdoors Spare ful. time year found We have 25 000 customers Pres Book Washington Mash foom Ind Dept. 182 2004 Admiral Way Seuttle Wash

MYSTERY Lighter No P' nt Windpronf. Lights Cigary Pipes Ciga e tes Wondall Box 1211 Tulsa Ostalioma 51 30

RELEIVE-Magazine Barry et Cata mues Ciffers From Everywhere toet Listed for Retick 6. Cincian att 26. Ot to

RECEIVE Mail, magazines catalogs toportunities 10c Star Manges Lemma

MAKE Plaza Pie fut pleasure or profit Send 1: 00 Its lan Pood Products, Box ba Beverly Office

PRFE Samples' Billie Cards, Expect Something Different, Multi-Mallers Box 152 Juction Mich

LOVED One a picture reproduced on an ported rives and bracelets Les Prived Laiest Fa ib Avenue stole Ocean's Import-ing Co. P.O. Box 382 Chicago M

ALUMINT M Discs 20 Os. 2 % Round 1're 1 1, 16' Ditto in Each FOB Pactory FO Box 6044. Sunsymptot Kan-MA CILY 10 MO

COVERNMENT Surplus Row to buy direct from U.S. Government Ra-A renall Trucks Jeens Truilers Kasmple H-10.10. Tractors Hotsts Chrispitessors Generators Power Tools & Clothing Send \$1 00 Box 141 Morgantown, W

MERKEYING INSTRUMENTS

NEW And Quaranteed Factory rebuilt | transits and levels, sale or rept. with purchase option. We will repair, trade or buy usd tastrumenta Wr. Warren King it Co. (Manufacturers of Surveying Instruments). 136 M. 12th St., Physidelphia I, Pennsylvania.

PPRMOVAL

JOSY For Pop a Sake Telephone 8-8818 Urgent Worried Lote, Katle

MEXICAN Legal Matters. A. Rapajo. Box 317 PS., Tipumu. Mexico

HOW Can I Find Out?" You Can! Information confidentially developed. Any matter person problem Wee,d wide Of-ficial) florised. Established 1922 William Berman, 179 Broadway, New York.

LEARN While Asleep Details Pros Re-War h Association, But \$10 K. Ontalia

AFFAMINE at amounting bustons Free catalog B & B Viram s 300 C Betton Rd Silver Surtner Mar and

CONFIDENTIAL mail receiving, warding \$3. Monthly, remails 250 Heylps, \$209 Carter, Bastimore 14, Maryland

RORROW By Mad \$100 \$600 Abywhete Air Mail Service. Postal Pinance 200 Key-line Building, Dept. 657 X, Omaha 3, Nebruaka.

CRABTHER Pa ; remalis. 25c. Keystone Ruterprine, Box 1 Detc) Pa-

REMAIL 25, Receiving Forwarding 41 month Roberts, 1363 Octavia San Franctaco B. Calif.

AMAZE Friends Entertain At Parties - Read Handan ting New Easy Course start learn of fatrly minutes Barga n. 3) 00 learn of truty minutes. Barga n. 11 06. Handwriting Box 72A, Malibu, California

BIBLS reveals Time of End Exert Year Morth Date sent free! Write Mar yest Jefferson City 2. Museum!

LETTERS remailed (8.25) or \$3.00 month. J. Patket Brookfield Rd RF12 3, Manthester Coun

COMPRISENTIAL mail receiving warding service 250 83 00 monthly Box 18, Huby Ainska

MAGNETOR demonstrates reality non-material world. Free box have Write Farafrid to Wondstork New York

CHRISTMAS Carda Remailed 35: J. Love 14.8 E 83d Los August 1 Call-Correta

ASTROLOGY Personalised reading by internationally renowned mystic Bend hame and birthdate with \$1 to Professor Cluchipio, P.O. Box 1863, Mismi Beach, Florida.

MEXICAN Law, Ocneral Fractice, Attorney & Conteres, Apte. 19. C Justes.

LETTERS resimaled with Colombian stamps. Two \$100-Crear de Hart, Apartado Aereo 650, Barranquilla, Colombia, Bouth America

HANDWRITING analyzed. Two dollars Eather Hong, 2500 First N.W., Seatile ?

SECRET Meil Receiving Porwarding System, 83 Month, Hedgeeth, Box 829, Alhambra 24 Ca'.formis.

MIAMI Classifieds Airmaned \$1.00 Re-Morida.

HYPNOTIZE - One Glance Complete 52 05 Entertain-Read their Hunde-Tell their Partures, Exciting Pun for \$1.00 fired their Minds \$1.00—their Character \$1.00 florick a PH2, Cincinnati 26 Ohio

MEXICO Remails 30c. Air Sec. Pive Font-cards 61 99. Information service Mexican Books Vibavicancio Apartado 2580. Mean of City

HEW Orleans Sunday Classified \$1.00 Gene. Box 8402 N O La

1808, 11,11, PERSONALIZED address Labers, four lines, \$1.05. Aigren Oifts, 50 Burklin, Murth Attleburg, Mass

ARTHRITIST Home, drugless method. Stuever .06 Maple, Excessor Springs Mo

MEXICO—Six stamped color vieweards, \$1.00. remailed free Letters, 25c Robin-con, Apartedo 23508, Mexico 18, DF.

BALDWESS prevented! Amazing new drugess method. Complete course \$1.00 Coleman. Bux \$162. Jewells Station. Shreteport. Louisians.

RULE others with thoughts " (Trapsthy : Details clamp. Windows, \$44-56 Superside Chicago 40

CLEVELAND Remailing 25c, 23 00 Monthly Gordon, 12201-C Miles, Cleveland Ohlo

LETTERS Remailed 25c Baltimore Promptly Richard 203 West 38th, Balti-more 11. Maryland.

READ Anyones Mind' Instructions \$1.00 ABC. Box 848 San Francisco 1-MS. Calif

UNUSUAL XMAS GIFT!



Completely different novelty born Sounds just like a lonesome bull. Imitates any rathe sound Ac ually used by ranchers to call cattle, Makes low gentle tone, or roars full blast. Makes pedertrians upple Variable tone control located on steering column

If your dra er can't supply you, order direct and send as his name

Bend sheek, M.O. C.O.D., specify ff or 12 roll system, Money back if not satisfied.

KATTLE KALLER DIV., 1908 So. 20th St., Omoho, Nebr.



- Really gets haptinetta
- Easily installed under head
- Fits any Cor. or Truch

Special Introductory Offer

\$10.95 Fin (\$2 below reg. list)



When Writing to Advertisers Please Mention Popular Science




a brilliant 800-foot beam. Yours, less 6-volt \$4.19 Sealed Beam Model . . \$5.50 Delte Electric Co., Morien, Ind.



The handiest electric lan-

Delta POWERTOP ELECTRIC LANTERNS

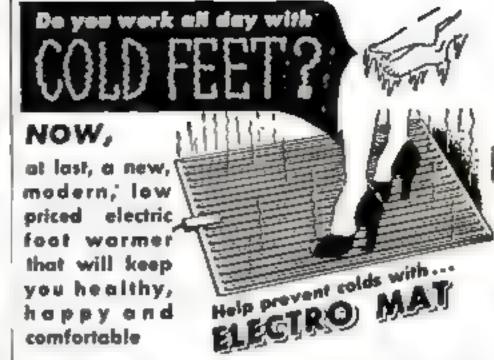

Check stand coshiers, secretaries, assembly line workers, housewives, office workers, theatre cashiers, machine operators, telephone operators, and many others throughout the country are now singing the praises of the Electra Mat. There is no further need to work all day with cold feet. Many colds, causing absenteeism and irritability, can be directly traced to cold feet. Safe and Economical

Size 14" x 21" light-warmht porteblo

Consumes lets power than o 75 watt light bulb. Mail your chick or memoy order today for ONLY

PETERSON RUBBER MAT CO. Arcadia, California

Electio Mals of \$7 95 each Please send me IMPORTANT SAVING of 4 or more deduced, price is unity \$5.75 upols, Engloser \$3.00 depart with prifer.

L C 0.0

Name. Address.

5lele PICAM FROM CHASIT





BENJAMIN SUPER with Ang Stock or few as \$14.95 Detains Madel with Chatery Stock Shown; as Low 8t \$17.95 Benjamin Asi Ritter and Benjamin Air Post is are Recognised All Over the World for Finest Workmamhip and Bighest Quality at Lowest Prices. Adjustable Power with Amazing Optimum Force, Fully Supranted Safe - Accords - Economical Easy to Use anywhere --

12 Models for Turget and Small Gaste 88 or 177 or 22. All Models Benjamin CO. Carbine Gas Riftes and Benjamin COs Richet Gas Pistols Use Standard Sure CO: Cartridges available everywhere, 2 Stage III 10 Jet Power - High (or Small Come - Lew For Target - 1 p to 51 Shots from each Cartridge. In Punjug - Sale - Accounts - Economical - Son Total 12 Models BB or 177 or 22.


Coloing All Sand Models Benja Free Gest CO- Gests & Sup-Market Sup-

Athe, Money Saving | Special

BENJAMIN AM RIFLE CO. MAIL BODAY BAR MARRON ST., ST LOWIS 4, MO., U.S.A. Name

Address Office on Hunting & Fishing Office! Cky.

State.

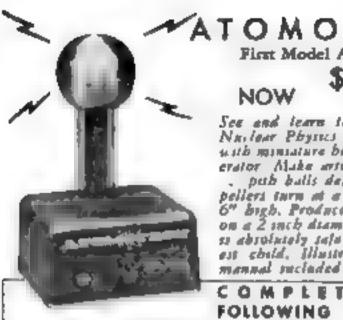

ATOMOTRON

First Model Atom Smather !

NOW

VD.

See and learn the wonders of Nuclear Physics and Electricity uith miniature bigh voltage generator Make ertificial tightning peth balls daly gravity, pro-6" bigh. Produces 75,000 rolts on a 2 inch diameter iphere, get to absolutely tale for the youngest child, Illustrated operation

COMPLETE WITH FOLLOWING APPARATUS

- . Smog Control Unit Preta Reaction Rotor
- Paper Strand Cluster
- · Plastic-encased Pith Ball
- . Electric Wand Unit . Neon Leght Wand
- Alomotron, battery aperated, runs for hours on 2 flashlight cells. Ship, wt, 1 lb.

 Atomotron operated by sturdy 110-valt mater, ac-Atomotron, k.t. form, AC motor, needs only strew-driver to assemble. Sh.p. wt. 3 lbs. Cash, shock or M O. Plus P P. costs. (In Galif. and 4% soles tax).


RELATIVATOR only =1 instant numerical solutions for hasis relativity equations.

The Relative of is a new meket were calculator that regultly solves. a wide range of relativities arobics to Mass to frase time dilution, Lorentz Eftegerale roller inn telocity innige time kinetic enerny, total energy all liene is postan aspects of English a Reg-rial Theory of Re ability are la mediately reduced to simple num-liers for any mana particle."




ATOMIC LABORATORIES

3084 CLAREMONT BERKELEY 5, CALIFORNIA

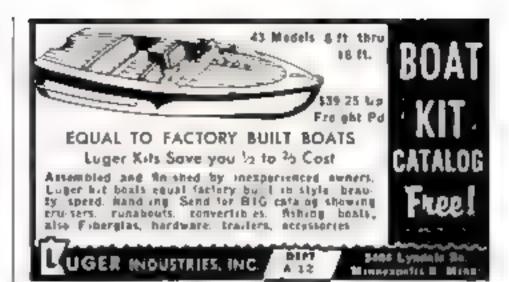



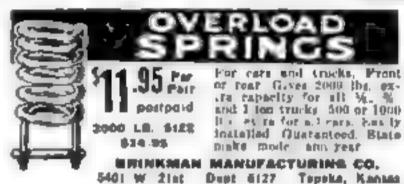

MINIATURE BATTERY POWERED VEHICLES



on Lite

SAFE...Dead-man's Switch - Shockfree Electrical System —3 MPH Speed

DURABLE...Cast-Aluminum Structure and Bronze Bearings.

* POWERFUL ... Battery Powered 2 HP Motor Starta Instantly.

Those vehicles are ideal as Quality Toys or for light industrial use. Small enough to fit Into an auto buch, yet powerful anough to pull a 250 lb. man up a steep stope.

Powered by Size 1 Automobile Battery (\$8.95 extra)

\$89.50 Kit form B171.57E Assembled. Bettery Charger Oriffing, reaming

and tapping required on kits

-- -- -- OBERHAUSEN ENGINEERING CORP. • 4000 ASHFORD RD., N.E. # ATLANTA 18, GA./^ - - - '

SAVE \$ ON US GOV'T SURPLUS

Our publication "Government Surplus Sales" lists bundreds of Itoms for sale by the U. S. Government at tremendeus savings, as low as 1c on a \$1.00.

These are samples of the savings that are being made.

25%, Deposit required with order • Shipped Railway Express Collect

LIFE BOAT \$12.00 GRINDER 54.69 SHAPER

DUMP TRUCK \$15,00 576.77 TRACTOR \$75.00 TYPEWRITER PREEKER \$7.51 \$30.00 SPRAT PAINTER \$15.25 MOTOR54.00

Hundreds others listed in our bulletin "Government Surplus Sales" and may be purchased direct from U.S. Government Hunting Fishing, Camping Sporting Equipment, Photographic Equipment and Supplies, Radio and Electronic Equipment, Amphibious Trucks, Jeeps. Boats Mctors, Binoculars, Plumbing, Electrical Equip., Cars. Power Tools, Machinery, Chemicals, Furniture, Office Equipment, Supplies, Scrap, Etc.

How may you receive our bulletin "Government Surplus Sales?" By sending \$1 00 to

GOVERNMENT SURPLUS SALES, P. Q. Box 169, Department 4-3, East Hartford 8, Conn.

FUEL PRESSURE REGULATOR



Let Milemaster belp you enjoy better, more economical motoring. Sold everywhere . . only \$6.85.

Money Back Quarantee

Dept J

MILES MASTER, INC. Exeland, Wisconsin

WARN HUBS TO Jeep



Over 100,000 Wern Hobs are now in use, proof that free-scheeling Zoral, with Warn Huba means bug asvings in gree, ungine, tire were, gas, plus more pep, performance, power in high and maintenance, New, with Warn Lock-O-matics, you have pronountedly, as you slight Ask your local 4-wall dealer to install Warn Lock-O-matic or Locking Huba to the install Warn Lock-O-matic or Locking Huba to the first local first for free literature.

WARN MFG, CO., Riverton Ber\$851812 Seettle Bt, We.

DINSMORE Compasses

Beautiful, precision made. Designed and disted for modern cars. Dimension compasses at a contime and moses by character too the right was the short cars. An deat gelt into

APPROPRIES BY AVE.

EVERY INC. WHILE BEINGS.

DINSMORE INSTRUMENT CO. 1414 42 Reter



SAVE MONEY BUY DIRECT!

World's larget phytographic operation of loosest cost actially below prices you if pay in countries where it is made?

FREE! 1958 PHOTO GUIDE


36 pages grammed with "how-to" information: prices, listings of every brand and type comers, ions, accessory, from Europe and Japan at an matched on prices. CAMEDA IMPORT CORPORATION


SENS POSTCARD TODAY

CAMERA IMPORT CORPORATION

I East 43 Street, New York (7 N Y Cept. 34



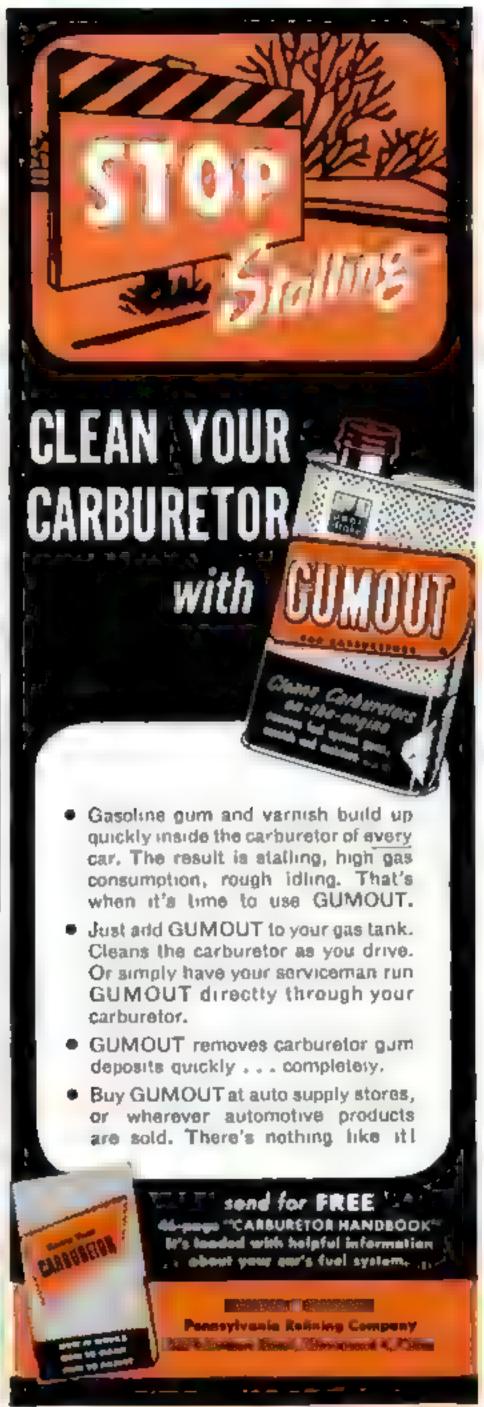

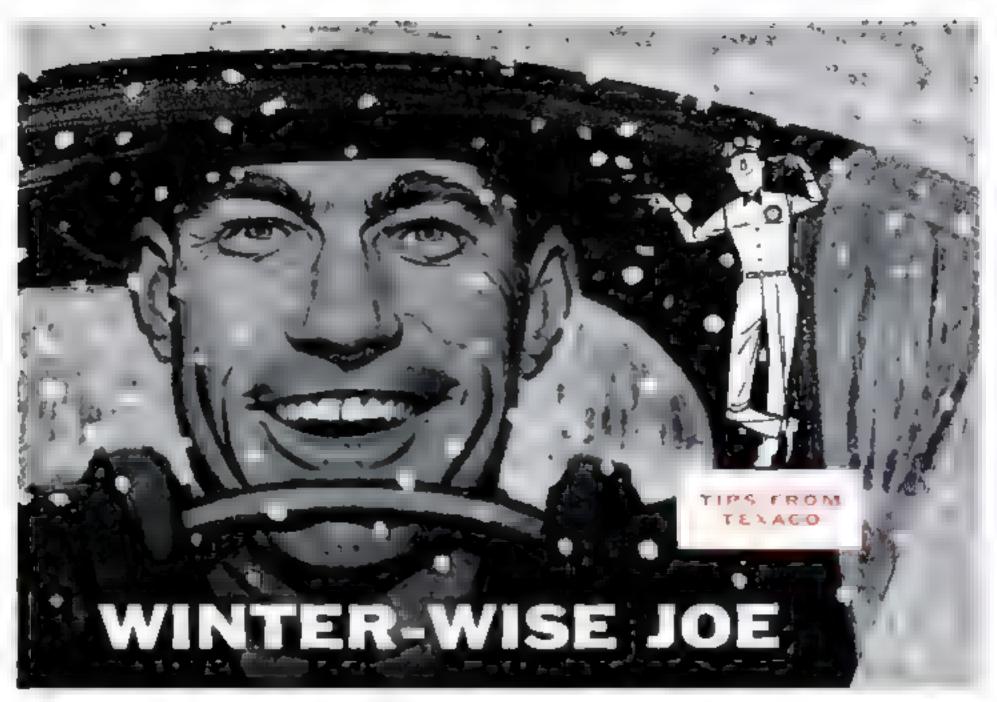

Winter driving problems that bother other drivers don't seem to bother Joe.

If Joe's car door lock freezes up, he heats the key with a match and inserts it. The lock thaws out.

Joe slides pieces of cardboard under the windshield wipers to prevent windshield frosting while his car is parked.

When Joe parks in the snow he always

backs up a little so there'll be space for a running start if the snow freezes or more snow falls.

Joe's Texaco Dealer checks his battery frequently to make sure there'll be plenty of power for starting . . . checks his anti-freeze to be sure of his temperature protection. Joe always favors Texaco products and the careful service Texaco Dealers give his car.



FKOW THE START



Start fast and save gasoline

When cold weather congeals ordinary motor oil, starting is slow and you waste gasoline. It pays you to use Havoline Special 10W-30 that flows freely in sub-zero cold, makes starting easier and saves on fuel. And, under high temperature conditions, it doesn't thin out like ordinary oil. You get full lubrication, a cleaner engine and more gasoline saved. Get this finer oil from your Texaco Dealer -the best friend your car has ever had

Texaco Products are also distributed in Canada, Latin America, and Africa.

THE TEXAS COMPANY

TUNE IN ... METROPOLITAN OPERA radio broadcasts every Saturday afternoon, ABC.



The 1958 Ford

How it stacks up against Chevy and Plymouth


By Devon Francis

NCE upon a balmy summer's day, the heads of Detroit's automobile manufacturing companies met in solemn conclave and adopted a resolution. Their pledge: to encourage motorists "to evaluate passenger cars in terms of useful power and ability to afford safe, reliable and comfortable transportation rather than in terms of capacity for speed."


That was June, 1957


With the Ford Division's announcement last month of its 1958 products, the "low-priced" cars made by the Big Three—Chrysler Corp., Ford and General Motors—were on the road for comparison. All three lines included "bombs"


In Detroit parlance, a "bomb" is a car that becomes a blur when

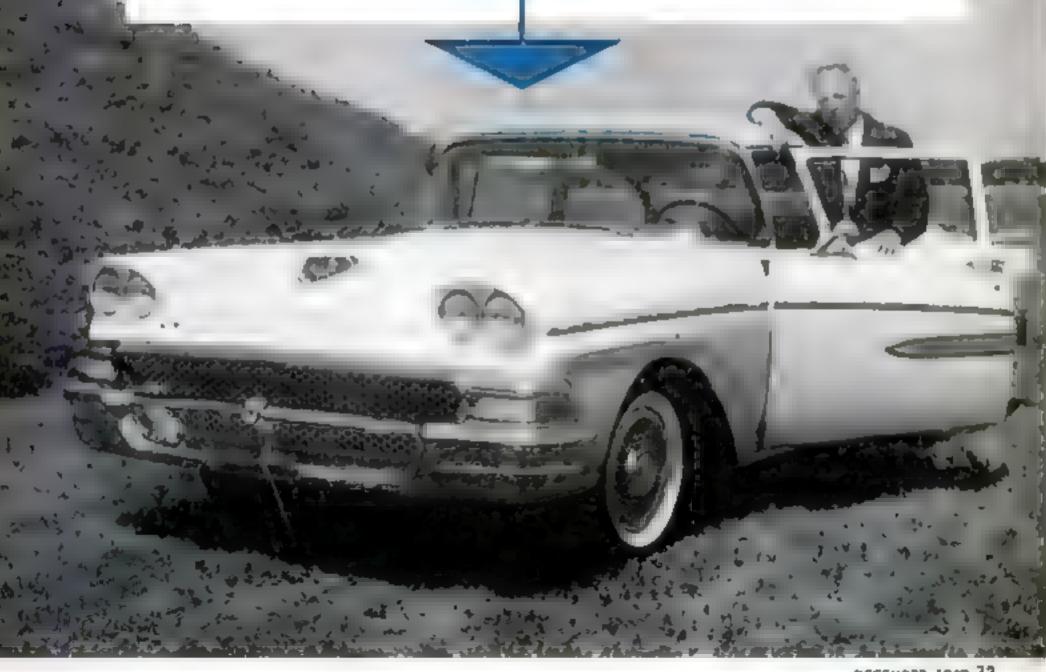

In portrait and silhouette, the three cars most popular

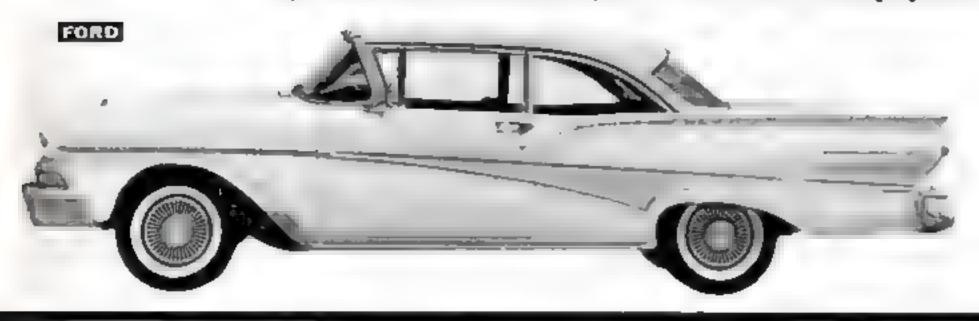

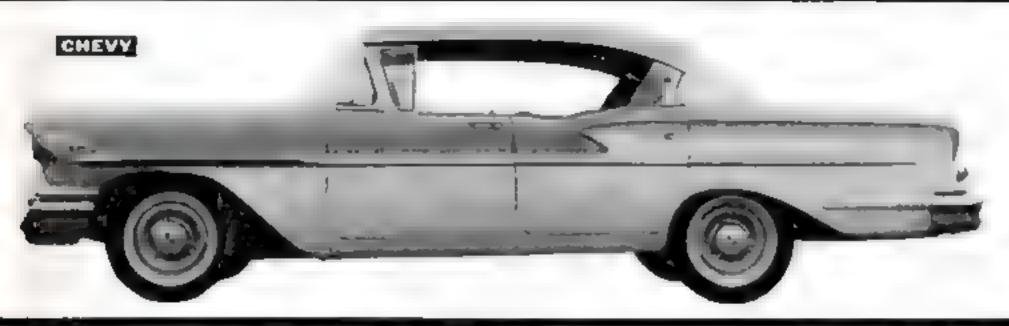

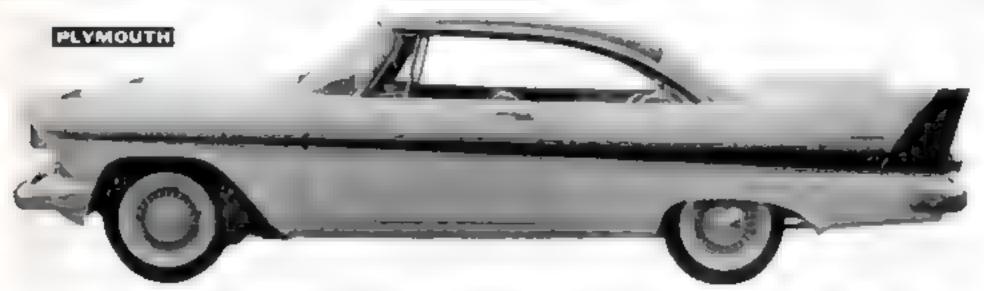

INDIVIDUAL STYLING TOUCHES in the Chevrolet, Ford and Plymouth are easy to spot despite

similarities in height, width and length. Ford and Plymouth retain their tail fins. Chevy has

the light turns green. Big Three bombs:

• Chevrolet's bomb is a 280-horsepower automobile, with 348 cubic inches of piston displacement under the hood, that can accelerate from a standing start to 60 miles an hour in 10,5 seconds.

 Ford's bomb is a 300-horsepower automobile, at 352 inches, that can accelerate to the same speed in 9.7 seconds.

 Plymouth's bomb is a 315-horsepower automobile, at 350 inches, with an acceleration time of 9.3 seconds.

For comparison, this is how those same cars, equipped with automatic transmis-

sions, rated in power and acceleration a mere five years ago:

Chevrolet—115 horsepower, zero to 60 in 196 seconds.

Ford—110 horsepower, 23.3 seconds.

Plymouth—100 horsepower, 20.6 seconds. For 1957, the top horsepowers for these cars—excluding that for Chevrolet's competition Corvette—were: Chevy 245, Ford 245, Plymouth 235.

The horsepower race for the Big Three, in other words, still shows no signs of breasting the finish tape.


While these prodigious, optional engine


74 POPULAR SCIENCE

with the U.S. motorist share that low, wide, long look





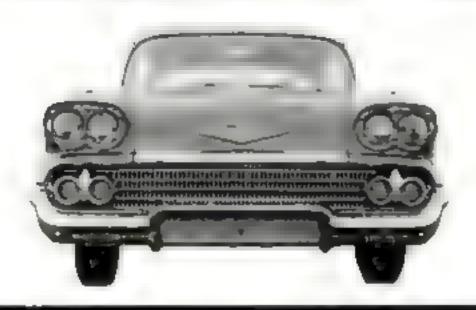

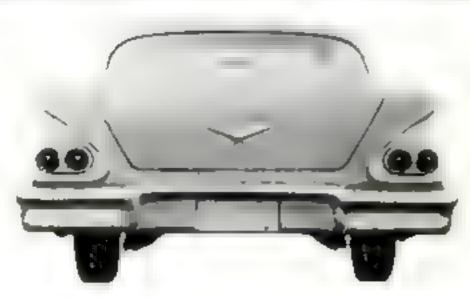







foolproof identification, Both Ford and Chevrolet feature twin-lens tail lights.

sizes may excite the most interest in the new model year for the three biggestselling domestic cars, they are by no means the most important changes.

Chevrolet has made vast improvements in its fuel-injection system. Ford has redesigned its automatic transmission. Plymouth has extended its optional three-speed automatic box beyond its Belvedere series to include all its lines.

Chevrolet has a brand-new frame with no side rails. Ford is back from the beauty parlor with a "flatter" look. Plymouth has a better power-steering unit. Two of the three cars offer air suspension.

All three come standard-equipped with four headlights.

All three have the fashionable stoopand-squat entry.

All three ride with the downy softness of sofa pillows.

All three are insidiously pretty.


All three—once again!—cost more than comparable '57 models.

Let's move in for a close-up of the Ford-Chevy-Plymouth products for 1958 —one car at a time—starting with the



instruments and controls in all three cars tend toward close grouping directly in front of

the driver. More responsive, higher-torque automatic transmissions are common ontions.

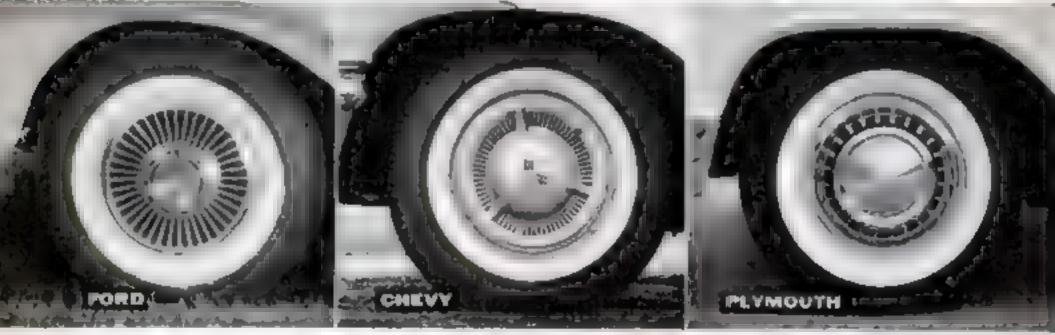

DISTINCTIVE WHEEL PLATES are features on all the cars. Some Ford models are up slightly in

turning-circle diameter-41 6 feet. Chevy's is

last of the three to undrape in the nation's showrooms.

FORD

This year there are four engine displacements but five options, compared with seven for 1957. Hold your hat now, because this gets complicated

A 223-inch, six-cylinder, 145-hp, engine can be had in most models. A 292-inch, 205-hp. V-8 is limited to the Custom and Custom 300 lines. A new 332-inch, 240hp. engine is only for the Fairlane line and station wagons. The same engine with a four-barrel instead of a two-barrel pot, at 265 hp., is only for the Fairlane 500 That new 352-incher with 300 hp., previously mentioned, can be had in all lines except the Custom and Custom 300. Finally, to satisfy shoppers who aren't completely confused at this point, the 332-incher, with four barrels and two exhausts, is available in the Custom and Custom 300.

How They Compare : The following figures ap py to a four door sedan, in each company's top line of cars carrying a volume-production engine and an	IWER	4CEMENT Inches)	O STROKE	COMPRESSION RATIO (1)	WER PER	CHT PER	M TOROUE	MAX MUM Mult Pubation SMISSION (1)	REQUIREMENT	STEERING RATIO (11)		
automatic transmiss on All measurements are in inches except where other- wise specified.	HORSEPOWER	PISTON DISPLACI (CIDIC III	BORE AND		HCRSEPOWER CUBIC .NCH	CAR WEIGHT F	MAXIMUM (b / fl.)	OVERALL TORQUE OF TRANS	FUEL RE	Manual	Power	
CHEVROLET	230*	283	3.875 x 3	9.5	.81	15 6	300	3.82	Prem.	23	23	
FORD	2651	332	4 x 3.3	9 5	В	14 1	360	4 56	Reg.	27 1	27 1	
PLYMOUTH	2504	318	3 91 x 3.31	9	79	15	340	3 82	Reg.	26.8	19.6	

^{*} Other horsepowers available in six- and eight-cyl. engines: 145, 185, 245, 250, 280. * Other horsepowers available in six- and



FOUR HEADLIGHTS eliminate necessity of using the same reflector and lens for driving and pass-

ing—a necessary compromise in old system, New lamps cut down on glare in passing.



PLYMOUTH'S WINDSHIELD remains the biggest, with 1,444 square inches of glass area. Chevro-

let's, at 1,135 inches, has dropped a bit. Ford windshield, at 1,055, is the same as in '57.

Memo: no fuel injection, But spark plugs are out where you can reach them, like Chevy's (PS, Nov.).

Ford had to make one change in a perfectly good automatic transmission because some buyers in 1957 didn't know what they had under their accelerator feet. On the three-speed box, a motorist had to push the pedal clear down through a resisting "detent" to get low gear for a jack-rabbit start.

When complaining letters came from

acceleration-happy customers, Ford gathered they had bought something they didn't know how to use. So for 1958, there are two Drive positions on the selector quadrant, in addition to Low.

In D (Drive) 1, the car starts in Low and upshifts through second to third. In D2, it starts in second and upshifts only once.

In D2 the motorist gets a no-cost premium—as he stops, a one-way clutch in the gearing locks everything up tighter

	CIRCLE DIAMETER CURB (feet)	BRAKE LIN NG AREA	GROUND C. EARANCE	WHEELBASE	OVERAL LENGTH	МІ ВТН	HE1GH)	OVERHANG		HEAD ROOM		SHOULDER		HIP ROOM		LES ROOM	
TURNING	TURMING-CIRCLE							Front	Real	Front	Rear	Front	Rear	Front	Rear	Frant	Rear
	41.3	157	6.8	117.5	209 L	77.7	57.1	35.8	55 B	35 t	34 6	56 5	56.2	621	63 2	44.7	42.8
	41 6	181 8	6	118	207 2	78	56 2	35.2	54	33 9	33 6	57.3	57	60	60 1	43 2	40.8
	42 2	184	5.5	11B	204 6	78 2	56 6	32.2	54.4	35 7	34.2	60 5	60 4	63	62 7	45.5	41.5

eight cyl. angines: 145, 205, 240, 300. • Other horsepowers available in six- and eight-cyl. eng nes: 132, 225, 290, 305, 315.

than a drum. Car can't roll back on hills.

In common with eight other brands of cars for '58, Ford comes with air suspension as an option. These are rubber bags in the place of steel springs, wrapped with a metal girdle and supplied with pressure by a pump.

For an off-year model (the Ford was completely new for '57), the car has been through an exceptional amount of sheet-metal changing. A mock air intake decorates the hood. There's a new aluminum

grille. Both roof and front fenders are "fluted." The deck lid has a channel like the Edsel's, but it's narrower.

The hood is 21/4 inches longer, the deck a half-inch, the entire car an inch wider There are still two wheelbases—116 and 118 inches—and two lengths. At 207.2 inches overall, the Fairlanes and Victorias actually are a half-inch shorter. But the rest of the brood, including the wagons, ranging from 202.2 to 202.9 inches, are a half-inch longer. Heights? Substantially

Ford improves gasoline mileage

BACK in the days when women wore hobble skirts and men fire-red galluses, a British engineer named Mr. Archibald Sharpe worked out a formula for a long-before-its-time kind of V-8 engine, He also created, for carburetor engines, a problem in fluid dynamics—known indelicately as slobber—that has plagued automobile makers ever since they adopted his formula.

For 1958, Ford has done something about it.

Archie wrote the mathematical description of a new kind of crankshaft—one with the cranks, or "throws," at 90 degrees to each other instead of exactly opposite, as was then the custom in all four- or eight-cylinder engines regardless of type. The formula was designed to keep engines from getting all shook up from vibration.

That was all—no more, no less. The idea lay doggo for 20 years. Then it began creating quite a stir in the internal-combustion business. Among the auto-

mobiles that adopted it was the 1929 LaSalle. Henry Ford introduced it on the first low-priced V-8 in 1932.


Today it's used universally.

The volume of complications that Archie's idea created was horrendous. But all that concerns us here is that while it did produce a smoother engine, it played hob with the intake manifolding of V-8's.

The old-fashioned V-8's with "flat" crankshafts were two simple four-cylinder engines glued together. Archie's V-8 was also two engines, but with a difference: The four cylinders of each engine were divided between the two banks.

The manifolding for the flat-crankshaft engine had been as simple as a child's prayer. That for Archie's was not. The fuel-air flow had to be routed back and forth between the two cylinder banks in a complex maze of pipes. That took some doing.

In the last 30 years, as compressions have gone up and engine design has be-

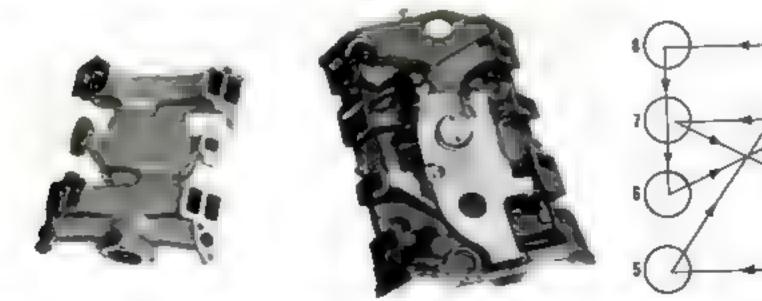

Old manifold (left) is skimpier than the new. Cylinder firing order shows air-flow problem.

unchanged from last season's road-hugging offerings.

CHEVROLET

Chevy, all new in Detroit's annual game of musical chairs, has five engine options. First there is the company's Old Reliable, the 235-inch, 145-hp. six. Then comes the first of the V-8's, a 283-incher, second-lowest on the totem pole because a 265-inch engine has been dropped. It ranges in power from a two-barrel-carbu-

retor job at 185 horses, through a fourbarrel at 230 and up to a fuel-injector at 250. On top is the 348-inch bomb

Most of these options are available on

most any Chevrolet,

A lot of work was done on the big engine's carburetion. During proving-ground driving the engineers recommended options of three two-barrel pots or one four-barrel. The conventional four-barrel carburetor turns out 250 horsepower.

[Continued on page 220]

with bigger intake manifolding

come ever more sophisticated, the intake manifolding has assumed the appearance

of a snake nest in spring.

An internal-combustion engine is essentially an air engine. It pumps air. In less than 50 miles, a 332-cubic-inch Ford engine driving a 2.69:1 axle will pump enough air to fill an eight-room house. The fuel, of course, goes along in suspension.

All the twists and turns in the intake manifolding of today's V-8's cause part of the gasoline to play hookey from suspension and condense, more in the piping to some cylinders than to others. Raw, indigestible fuel slobbers into the cylinders—into some more than others.

Slobbering engines are fuel hogs. The fuel-air mixture has to be enriched to the appetite of the cylinders receiving the lightest burnable charge. The other cyl-

inders get too much gas,

That's where Ford for '58 comes in. The Ford Division has simplified its intake manifolding. Increasing the size of the manifold area gave more space to route the piping. That enabled the engineers to remove some of the kinks that produced the condensation.

Space for the intake manifolding in V-8's has been at a premium ever since Archie's inspiration of 1909 became common law. There's so little room between the banks. The Oldsmobile Viking of the late 1920's used valves turned almost horizontally to make way for better manifolding. Reciprocating-engine designers were searching for lebensroum long before Hitler.

Where did Ford scrounge the added

space? From the cylinder-head area, which has been shrinking anyway as compressions have risen.

When POPULAR SCIENCE asked a Ford engineer why no one had done this before, he asked in turn, "Why do you still wear a necktue?"

Ford's new V-8 engines for the new model year have those bigger intake manifolds.

Ford's six, at 145 horsepower, remains much in evidence. And, by the way, six-cylinder engines don't have that rocking-couple problem. Never did have. That's because the pairs of cranks are at 180 degrees to each other, and there are always two cranks in the middle which just naturally cancel out vibration. As a breed, the six is as mannerly as Little Lord Fauntleroy. Many V-8 engineers are said to dream wistfully of it after a hard day.

Well, the bigger Ford intake manifolds have paid off. The 332-cubic-inch engine for 1958 gets 10 percent better gas mileage than the 272-cubic-inch for 1957. The new 352 engine is 15 percent better on gas

than 1957's 312.

Not all of this, to be truthful, is due to easier in-breathing. Part comes from some cam-shaft de-tuning, so a motorist can get more horsepower at a lower r p.m. In some instances, it comes from a lower axle ratio. In the new dual-range automatic-transmission Fords, it comes from a change in the three-speed arrangement—so a driver no longer has to put his foot in the carburetor to get a low starting gear. Takes some load off the engine.

But a substantial amount of gas is saved because it isn't slobbered away.

New Olds Lowers MPH to Lift MPG

By subtracting from the high end of performance, engineers get new fuel economy, even on a three-pot engine





TWO INCHES WIDER and an inch lower, but with

TWO INCHES WIDER and an inch lower, but with same overall length as in '57, new Oldsmobile retains little of its former appearance. Forged aluminum grille carries series identification.


CONOMY VERSION of Olds' carburetor is smaller, has only two barrels. Faster air flow through intake manifolding permits use of leaner mixture. (Four barrels and three two-barrel pots also are available.) Lower axle ratios pinch pennies, too.

If YOU are getting, say, 18 miles to the gallon of gas out of a 1957 Oldsmobile 88, there's news for you in the 1958 crop of Lansing-made automobiles. You can get 21 miles to the gallon, and even more, from an 88. You can get almost as much from the more powerful Super 88 or 98.

There's a reason. Oldsmobile—which started the crescendo of horsepowers in the industry just nine years ago with the first of its Rocket engines—has taken a bold step.

It has subtracted from some of the performance at the high-speed end of the horsepower output and added the result



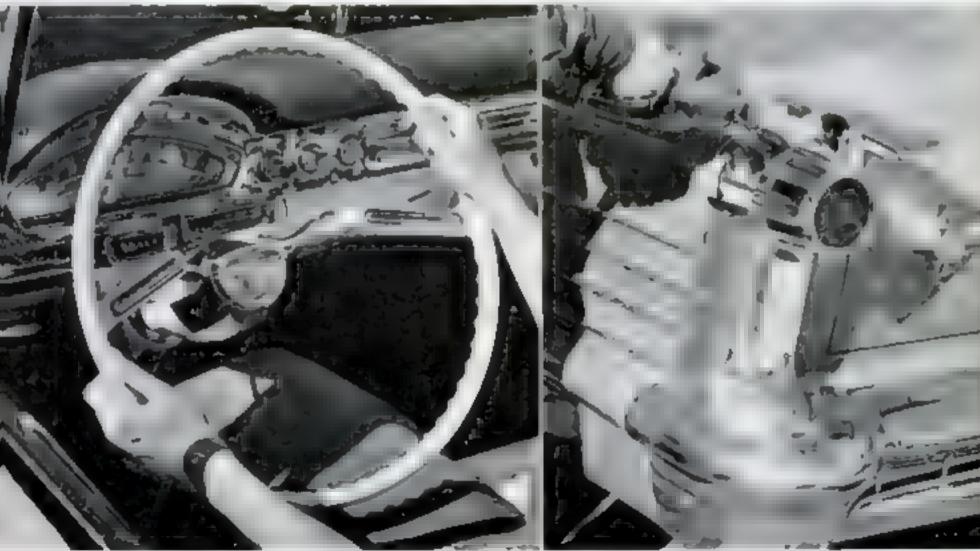


ELONGATED BUTTONS replace horn ring on Oldsmubile's deep-center, two-spoke steering wheel. Revised Hydra-Matie transmission, shared with Pontiac, Cadillac, is livelier in cold weather.

FUEL FILLER PIPE is just ahead of left rear tunning light and under chromed fender crown. "Exhaust" holes in the bumper are only for looks—pipes are hidden under the body.





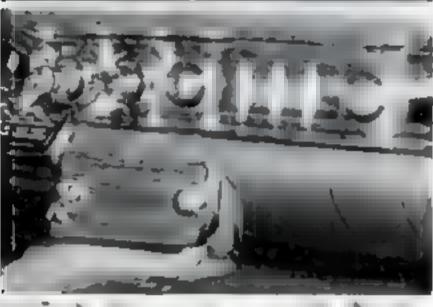



REMOVABLE RADIO, an option, is pulled out of panel by folding handle. In car, it uses car's antenna, speaker system, radio-control knobs. Small padlock, and release button inside glove bin (which can be locked), theft-proof it.

to fuel economy. Here's the reasoning:

"For years," remarked an Olds engineer, "everybody in the business has been pushing up horsepower and putting it in performance at the expense of economy. We feel that it's time for a compromise"

To which many a U. S. motorist will

add: Amen.

Olds has done nothing that any other manufacturer can't duplicate. It has refurbished its high-performance, gas-eating camshaft. It has redesigned its intake manifolds. It has reduced its axle ratios.

The 88 series of cars actually is down in horsepower from 277 to 265. But the nub of the change in this car is in the intake manifolding and carburetion. Attacking the economy problem differently from Ford (p. 78), Olds shrank the size of its intake piping. That speeded up the velocity of the air flow through a single, two-barrel carburetor. That resulted in better atomization of the fuel. And that permitted a leaner mixture.

Horsepowers of the Super 88 and 98 lines, with four-barrel carburetors, are up. As against 277 horses for 1957, these engines now produce 305. Optional on all lines are three two-barrel pots producing 312 horsepower. Used at sensible speeds,

they are economical of fuel, too.

Economy is easily half the story in the 1958 Oldsmobile. The other half is appearance. The stylists made a bilious appraisal of the sheet-metal configuration on their '57 vehicle and then threw tradition to the winds.

That Oldsmobile look is gone. The "mouth" in the grille has disappeared. The tuck in the beltline is moved forward. The inevitable chrome is in horizontal lines, accenting length, instead of

swooping at the rear treads.

There's an optional air-suspension aystem that may well prove to be the best in the industry. Filters purify the air before it enters the system, and thereafter the air can be recirculated among air bags. The Olds people say this eliminates the possibility of failures caused by dirt, ice or snow getting in.

As for the sacrifice of performance to economy, it's perceptible only at speeds above 65 miles an hour. By the merest coincidence, that's just about all that the law allows, where speeds are restricted, from the rock-bound coast of Maine to the smoggy shores of California.

758 Pontiac Is Longer Than Ever



FROM ANY ANGLE, headon, back, or sculptured side, new heavy-muscled Pontiac looks bigger.



Annual Ed Murphy manufactured buggies in a factory on Oakland Avenue in Pontiac, Mich. They had one horsepower—that is, one horse. In the intervening years, the factory dispensed with whip sockets and shafts, and installed internal-combustion engines. The company founded by Ed Murphy now is producing self-propelled buggies with up to 310 horses.

That's Pontiac for 1958.

The car sailed into the nation's showrooms last month with the majesty of a new ocean liner. It was:


- Longer by as much as nine inches.
- Lower by as much as 4½.
- Wider by more than two.
- Snappier by far.

For the 50th anniversary of General Motors—of which the Pontiac Motor



Division is a prominent part—the car was new from prow to stern.


It had an X frame like the Cadillac and Chevrolet. For the first time in its history, it had coil springs all around for a softer ride, with air bags optional. Its fuel-injection system had been tested in

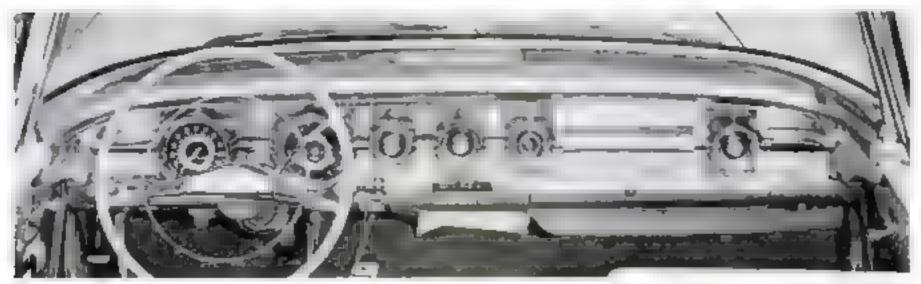

Recessed instruments have white figures, black faces, with orange pointers for readability.




EXPOSED VALVE BODY shows one of two thermostats (in center) added to Hydra Matic transposition for liveber cold-weather operation. Change is most apparent in 0-20 degree range.

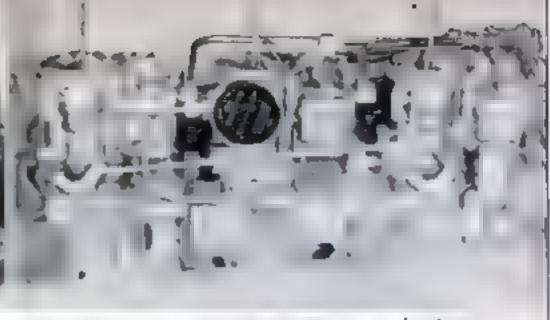

three two-barrel carburetors supply 300 hp on this 370-cubic-inch engine, fuel injection gives 310. Engines with 8.6:1 compression ratio use regular fuel; 10:1 ones need premium,



THIN FILLAR on Star Chief four-door sedan contributes to hardtop look. Lowest model is the Bonneville sport coupe—55.6 inches.

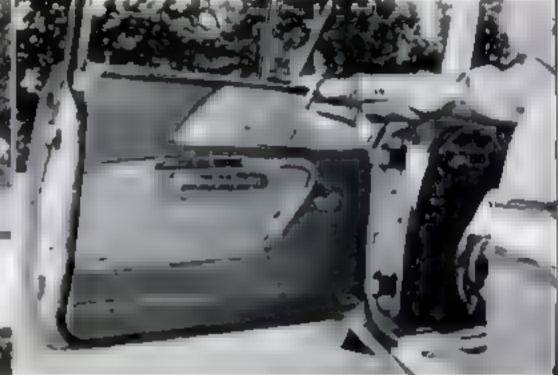

interior trim pushes GM's higher-priced vehicles for elegance. Windshield area is up 54 square inches. The hood is an inch lower.


service and now was ready for any and all customers with the price There were two new series of Pontiacs—the Bonneville, in flavors of convertible and sport coupe, and the Super Chief, on a longer wheelbase. The sheet metal on all models had that guided-missile sculpturing. Note: no fins.

One of the biggest changes in the Pontiac's behavior—shared for the new year with Oldsmobile and Cadillac—centers on the addition of two little bimetal thermostats in the Hydra-Matic transmission. Two years ago the gearshifts in this automatic box were smoothed out by the substitution of a tiny fluid coupling for one of the clutch-band combinations (PS, Nov. '55).

But when the frost was on the pumpkin, and chilled oil thickened, the gears got sluggish. They "hung on" past a decent interval in accelerating. They thumped. That's mended now. One of the two thermostats opens a valve to quicken the filling and emptying of the tiny fluid coupling until the oil heats up. The other one does the same kind of job in the transmission's valve body, the "brain" that upshifts and downshifts.

Last January, Pontiac engineers took some of the revised transmissions up to that Minnesota town that's always figuring in the winter's b-r-rr news, Bemidji. Worked fine.

In engines, the new Pontiacs are a Kris Kringle's gift sack—there's something for everybody. Starting with a two-barrel-carburetor job at 240 horsepower with a compression ratio of 8.6:1, they run through two barrels at 270 with 10:1, four at 255 with 8.6, four at 285 with 10, three two-barrel carbs at 300 with 10.5 and, finally, fuel injection at 310 with a compression ratio of 10.5:1,

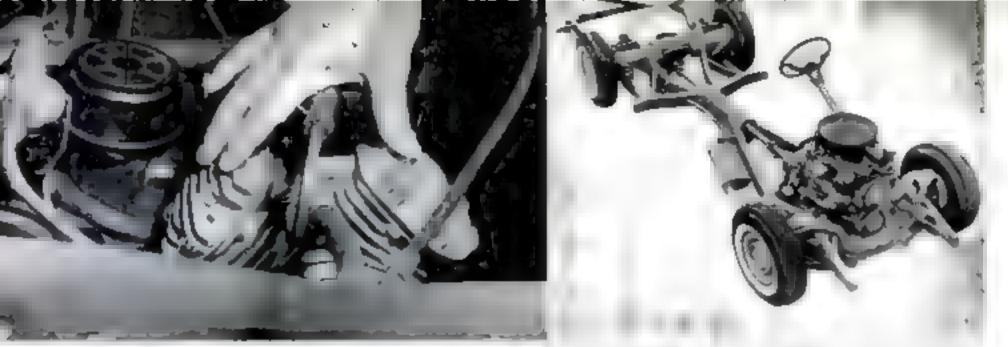

TWO-CYLINDER COMPRESSOR for optional air springs, belt-driven from crankshaft, produces top pressure of 250 pounds per square ioch. Override valve can raise the car several inches.

X-TYPE FRAME and propeller shaft with three universal joints contributed to lowering car's silhouette. Itali-joint front suspension has anti-dive control. For the rear; coil springs.




SONNEVILLE SPORT COUPE comes with such fancy items as radio speaker and pop-up armrest in center of rear seat, and chromed seat ends.

FUEL-FILLER DOOR is behind left rear back-up light. Both lamps above are running lights, turn signals. Trunk contains 17 cubic feet.

All these combinations emerge from one basic piston displacement, boosted from 347 cubic inches to 370 merely by boring bigger holes in the block. Exhaust valves and exhaust manifolding are up in size for better breathing. Hand in glove with that are alterations in the valve timing. The intake valves are open four

degrees longer, the exhaust valves two. Gases have more time to get in and out. Gives more miles per gallon.

To performance, the new Pontiacs add glamor. Colors range from Starmust Silver to Reefshell Pink, and on that Bonneville convertible four real bucket seats come as an option.

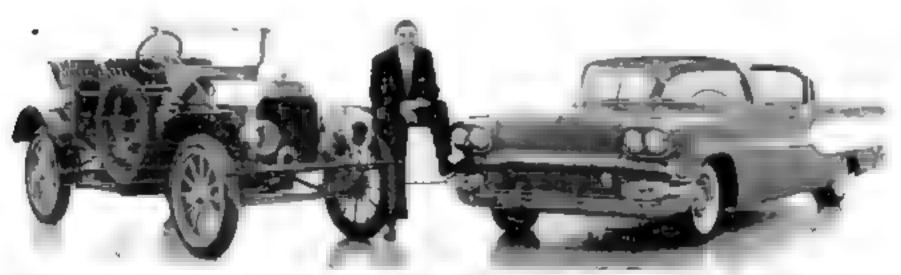


General Manager S. E. Knudsen with 1908 Oakland, Pontiac's granddad, and '58 product.



Cadillac's Extended Deck Sedan, with lengthened hood and fenders, jeweled grille and chrome

Why They Stretched the Caddy Hood

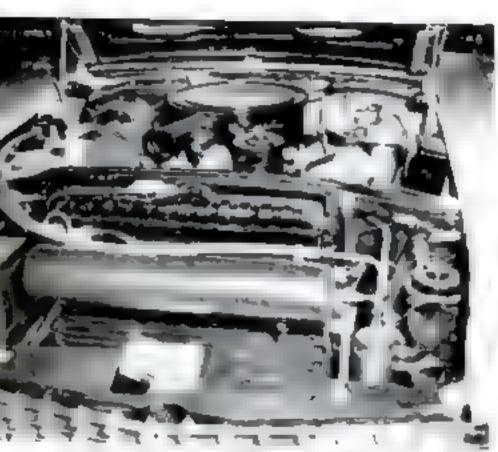

ALL THOSE 315 HORSES are comfortably stabled under the bigger hood. Engine displacement of 365 cubic inches is unchanged but compression ratio is boosted from 10:1 to 10.25:1. Valves are bigger, fuel economy better. Cylinder in front of radiator is the reservoir for optional air springs—standard, however, on Brougham.



Caddy, vintage 1957—the hood was too short.


Clark Street in the city of Detroit, where Cadillac cars are made, who have aching ears. Their ears hurt on account of some unkind remarks made to them in the last twelvementh by their customers. This situation resulted in an important change in the Cadillac for 1958.

Last year the Cadillac people thought it would be a dandy idea if they increased over-the-hood visibility for the driver. So they shortened the hood. Things came out pretty nice. A motorist could see a lot more of the road. The Cadillac people were pleased with themselves.

Then, whammy! The customers got



speed lines-all 18 feet, nine inches of her-sits regally for her 1955 portrait.

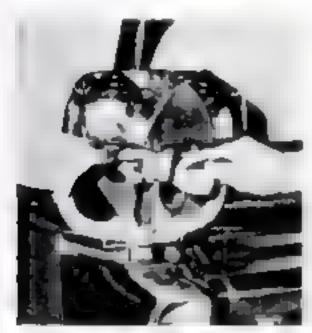

FUEL FILLER PIPE in Series 60 is located behind the inboard lamp of its twin running lights.



Splaying out frame's rear legs removes humps from trunk floor.

sore. Better visibility? No. siree! They wanted the hood longer. Gave them a feeling of power.

How did the Cadillac people dare put a dinky little hood on a great, big powerful car?


Well, the first rule of business is that you don't spit in the customer's eye. So for 1958, the Cadillac people lengthened the hood by almost five inches. The visibility from the driver's seat is down, of course, but the customers will be happy again.

They will be even happier to discover that the new Caddy's front fenders are four inches longer. Again, less visibility, but think of all that lovely sheet metal out front!

The people at 2860 Clark Street have reluctantly decided to take the world not as they want it, but as it is.

On these pages is the Cadillac as the customers demanded it.

The car not only looks more powerful, it actually is—315 horses compared with 300 for 1957, and an option that goes clear up to 335. All the new Caddies have those longer tail fins, originated on the Brougham. The X frame is revised, and—naturally—there's optional air suspension, pioneered by Cadillac, on all models.

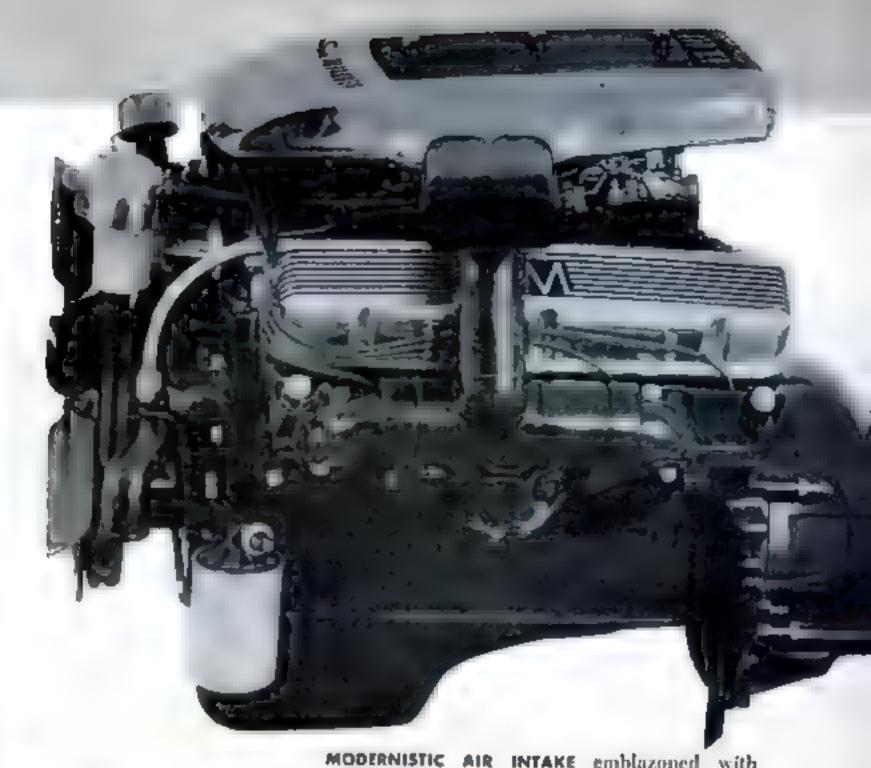

The 400-hp. Marauder

MODERNISTIC AIR INTAKE emblazoned with "400 H. P." squats over three two-barrel pots on the most powerful of U. S. production auto engines. Besides a high-performance cam, the new engines shortened intake piping fully jacketed with cooling water for denser air charge, helps deliver the mammoth power output.



Where Mercury Got Those 400 Horses

It has Lincoln's piston displacement —the industry's biggest—plus a hot cam, three carburetors and WHOOSH!

Were announced last month, there was a mouth watering treat for the customer covetous of whoosh'—a 400 horsepower engine. This is 65 horsepower more than you get in the mightiest of the new Cadillacs.

It is 55 horsepower more than Chrysler puts into its plush Imperials



Bayonets in rear fenders and wings on the

OUTRIGGER running lights-of bayonet design—are 30 inches long in Park Lane series. which has overall length of 220 inches. Same lights in Monterey and Montclair are shorter. Axle ratios go down as far as 2.69 1 to take advantage of greater engine torque and effect fuel economies.

and 10 horsepower more than in the latest issues of the Chrysler 300-with fuel injection.


Mercury didn't say why all the horse-

power. It only said how.

The engine is a product of the biggest block in the Ford family. It displaces 430 cubic inches. It's the same block, same displacement, used in the Lincoln. It's also the same block, bored to 410 cubic inches, that produces 345 horsepower in the Edsel's two top lines: the Corsair and Citation.

Mercury has nudged 400 horsepower from the block with a different camand a resulting higher r.p.m,-plus three two-barrel carburetors. The engine turns 5,200 revolutions at top output. That's 600 more than Mercury's second-best engine which, with the same displacement and compression ratio, produces 360 horsepower.

Overshadowed by this new engine is news of Mercury that otherwise would be of considerable importance: There's a jack-rabbit transmission, air suspension and (of course) four headlights, And there's a new series, longer and swankier than the Monterey and Montclair: the Park Lane.

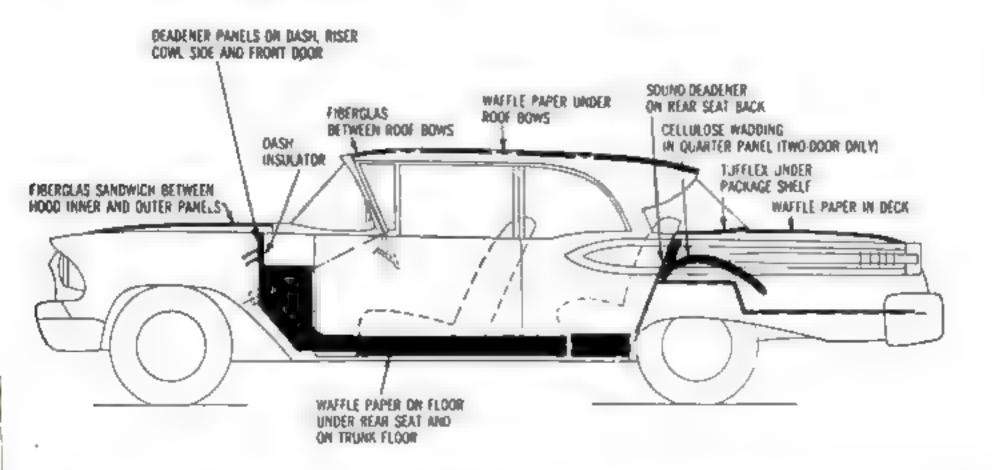

Body sound-deadening material is like that used in atomic submarines for noise insulation. 90 POPULAR SCIENCE

front decorate 20 new models

headlights make for wide look. Reservoir for air springs at pressure of 300 pounds per square inch is behind and below right headlight. Engine options: two blocks of 383 cu. in. producing 312 and 330 hp., plus the two 430-cu.-in. blocks. All have 10 5:1 compression.



Starting next month:

PS Staff Writer's Eyewitness Report on Russian Technology

Does Sputnik mean that the Russians are ahead of us in other fields of science and engineering? What about the everyday products of their modern technology? How do their automobiles compare with ours? How good are their new roads? What's their TV like? Do they have home workshops and power tools? What kind of household appliances?

When Sputnik began beep-beeping to a chilled world the Soviet challenge to American know-how, a Populan Science staff writer, Senior Editor Harry Walton, was completing a 4,000-mile automobile tour of some of Russia's most important industrial areas. He's one of the first American magazine reporters to get a close look at the way ordinary Russians, outside of Moscow, live and work in this age of earth satellites and intercontinental missiles.

You'll want to watch for the first of Harry Walton's exclusive, first-hand reports on modern Russin . . .

... in Popular Science for January

\$150,000 Car Shows

Here's a dreamboat with a different purpose—to protect you and your passengers like eggs in a crashproof crate

MAN who bumped his head has designed what is probably the safest automobile in the world. Its name: the Safety Car. You can see it soon. It'll be shown in cities like New York and Boston first, then probably in auto-display rooms in smaller towns.

Its manufacturers—the Liberty Mutual Insurance Co. and the Cornell Aeronautical Laboratory—have only this one auto in their 1958 line. They have spent

\$150,000 to produce it.

Outside, it's a streamlined, two-door, two-tone green sedan, not unlike other autos. Inside, you'll see why it cost so much: It contains more new ideas than

any car you ever saw.

The man most responsible for these ideas is Edward R. Dye, 55, head of Cornell Lab's Safety Research Department. Dye doesn't expect Detroit to snap up his car and produce it. Instead, he hopes the manufacturers will pick up and incorporate the car's ideas—all of them aimed at making passengers safer.

"Take the driver's seat," Dye said. All the seats in the car are bucket seats—to keep you from being tossed around in an accident—and they looked uncomfortable



FOLDING DOUBLE DOORS provide fullest possible access to inside of new Safety Car, do not stick out into road as far as many doors. Closed, they are locked into place by metal bars, cannot



CENTER BACK SEAT faces to the rear, is childsize. Boy, resting head against soft pad, is in what is probably the safest seat in the car. Shelf

behind the back seat is hollowed out below top of the seat back. This keeps packages from being hurled out in case of sudden stop.

Way to Safer Design


By Gardner Soule



come open in a crash. Rounded rear bumper tends to turn dangerous smashes into glancing blows. Wide rear window adds visibility. The car is painted dark green with white top.




DRIVER (above) sits in the center of car for greatest protection, best view Front-seat riders are belted in; in a crash they would be held in place snugly, as the bottom photo shows.

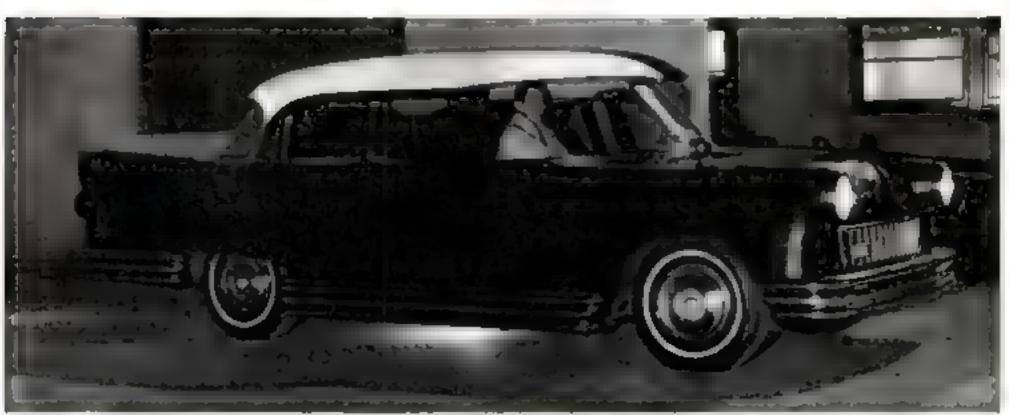

LIGHTS BENEATH CAR are to make it visible from the side at night. Front and rear bumpers wrap around. There is also a bumner all along each

side. All bumpers are mounted on shock absorbers containing springy, plastic material to increase shock absorption in case of collision.

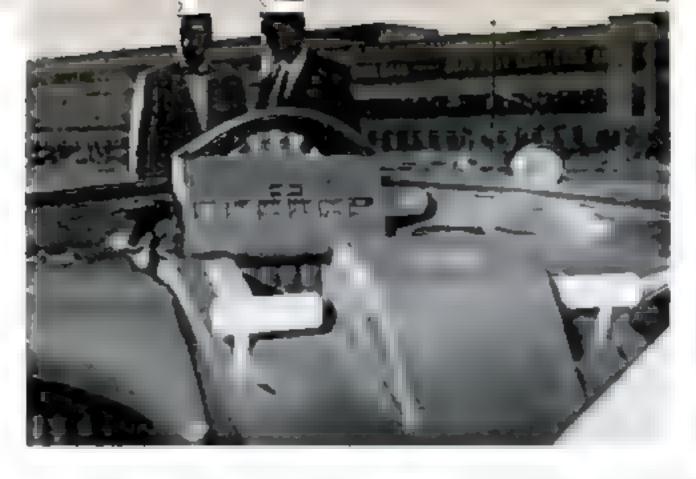

TWO HANDLES guide the car-there is no wheel. Handles are on a padded panel held in place in driver's lap. Switches above left-hand handle are for lights; similar switches, not shown, at driver's right, control driving speeds. Car's speed is shown in direct range of vision as driver keeps eyes on road. Beneath apeedometer, other instruments show mileage, oil pressure, temperature, battery charging, fuel, time.

"Pull down the driving panel," Dye told me. The most startling thing about the Safety Car is how you drive it. The driver's seat is in the middle—not at the side. This protects the driver from side blows, gives him better control, lets him keep little accidents from becoming big ones. The driving panel, which replaces the steering wheel, rocks down from the dashboard and locks into place just above your lap.

The steering wheel has vanished from the Safety Car because the Cornell Medical College reported that the wheel, either by means of a broken rim or the steering post itself, was a lethal instrument.

"Place your hands here." Dye pointed to two small handles, each about as long as the grips on bicycle handles, mounted out toward each side of the driving panel. "You don't have to steer," said Dye. "You merely guide. This you do by moving either handle slightly forward or backward—a tiller-like motion. Try it." The car has power steering and the front wheels turned easily.

I thought the feeling of sitting behind the driver's panel much like that of sitting at a desk. Your arms are held naturally, lightly and easily on the panel.

Ignition key and starter are at the right, ahead of the panel on the dash. Dye showed me the horn button. It's right under your thumb, on the right-hand steering handle. In the corresponding end of the left-hand handle is your light dimmer. Recessed, spring-mounted buttons on the panel control driving range and lights. The buttons can't harm you in a crash even if you strike them hard,

Similar, no-harm-possible buttons, in the right-hand wall of the car, run the radio. In the front left-hand side, other buttons control heating and ventilating. Inside door handles fold flat and out of the way.

The driver's seat is slightly ahead of, and slightly higher than, the other two front seats. This thronelike arrangement gives the driver an unblocked view on both sides and lets him concentrate on driving.

The only things the driver operates with his feet are the long, hard-to-miss brake, and the accelerator.

The car that took a year to build

THE Liberty Mutual Insurance Co. and the Cornell (University) Aeronautical Laboratory built the Safety Car by hand, and it took workmen a full year to do it. The man here is putting into place a piece of the double floor—double to provide tracks for the doors to run on and for the front seats that move forward and backward for convenience of riders and drivers.

The builders started with a 1955 Ford, and made it over. The cowl area was lengthened by the dark panels beneath the windshield. This allowed the windshield to curve gently, with the least distortion. Light lines over the windshield are arms that will swing wiper blades that clear entire windshield. The arms are covered by the roof in the finished auto. Folding doors were made to open almost the whole width shown.

At front and rear of doors, steel roll-over bars are incorporated into the body. These are strong enough to support 3 1/2 times the car's weight in an overturn, and arch directly over the riders' heads.

SEAT BELY snaps closed easily to hold back-seat rider in place. Everyone in Safety Car is buckled in. Bucket seats also help. There is padding in ceiling, sides, floor, backs of seats, everywhere. Concept of car is that of a package designed to protect fragile goods-people-in any possible crash. Experts believe you could sail into a telephone pole at 30 miles an hour in the Cornell car and step out the door unscathed.



The other two front seats also have desklike panels that lock in place in front of the riders and provide armrests, although they do not, of course, have driving controls. Each of the three front-seat panels has two arms that hug you on each side. Between the arms is a seat belt. Back seats also have retractable belts.

Dye regards the Safety Car as his masterpiece, and the ideas in it represent 30 years of work and study on his part. Back in the 1920s, when he was playing football at Purdue, he got a couple of bad whacks on the head. This led him to

study kinematics—the science of bodies in motion. And it led to his designing new injury-reducing helmets for Cornell footballers, and safety matting for boxers and wrestlers to land on.

A box to protect eggs in transit was perfected later by Dye. You can toss it against a wall and not crack a shell. Then, thinking that the human head was like an egg—soft matter surrounded by a shell—he built, with help from Liberty Mutual, the Safety Car. The man who made travel safe for eggs now believes he's made travel safer for you.



Science Closes In on

Will 1958 see the capture of the mysterious creature that mountaineers have hunted for nearly 70 years?

THE longest game of hide-and-seek on record is being played on the roof of the world: in the highest Himalayas. It has gone on, so far, for 68 years. The seekers are men, including today's best Himalayan explorers. The hider is an unknown man or beast—one? several?-that makes mysterious anthropoid footprints in the icy snows blanketing the world's ceiling (PS, Dec. '52).

No Western men have had more than a glimpse of this unknown creature they call the Abominable Snowman. though explorers and mountaineers cannot find the snowman, it has shown an amazing ability to find them.

In 1951, Dr. G. N. Dutt, resting near Everest, looked up to see that he was being stared at by a creature with grizzly brown hair on its head, apparently a snowman. The beast promptly vanished. In 1952, the Swiss expedition that almost climbed Everest heard the snowman's velos, tantalizingly near—but the snowman stayed hidden by fog. Another near-miss. In 1953, the British, on their way to the first successful ascent of Everest, heard another snowman sound: a



1889: World's most Western man startling tracks

Just as soon as penetrated earth's highest

places, he was shocked to find bare manlike prints in the snow. Col. L. A. Waddell first discovered them, 16,000 feet up, in Sikkum. How could a man live in those frigid winds? Yet there was the proof: Something or someone was walking across the roof of the world.

1890s: The body the mystery from beno one identified ing cleared up at the

One near-miss kept start. Workers on a

telegraph line near Jelap La (a pais) disappeared. British troops searched the area, shot and killed a wild, shaggy-haired apelike beast. But they left the corpse in the mountains; no scientist was there to look it over and identify it. There was only an army report.

SE POPULAR SCIENCE

'Wild Man' of Everest

whistling cry. Again the snowman stayed invisible. In 1954 and 1957, the snowman —by now perhaps the most-wanted quarry of any chase—eluded expeditions sent


out expressly to bring him back.

In fact, the snowman has displayed its tracks, sometimes very fresh ones, to almost every Himalayan expedition of the 1950s. Two Europeans in 1948 actually came to hand-to-hand grips with the snowman. This ghost of the Himalayas has been called a bear, monkey, panda, ape, yak, horse, musk deer, lynx, snow leopard, wolf. No identification has stuck. For one thing, the humanlike tracks appear at far greater heights than the known ranges of any of these animals.

But what if some familiar animal has

got beyond its recorded range, straying into the snowy heights? To answer that question, the London Zoo made live tests. It recruited animals native to the Himalayas and studied the imprint of their tracks in wet sand. Humalayan bears were quickly eliminated. Better clues came from animals most nearly resembling man. The closest likeness was the langur monkey. But its tracks were not nearly so big as the snowman's.

Starting in 1958, more nations than ever -including the U. S., Britain, Switzerland, Italy-will send expeditions into the Himalayas. All will watch for the manlike beast. Will they succeed where three generations of explorers before them have failed? Here is the story up to now.

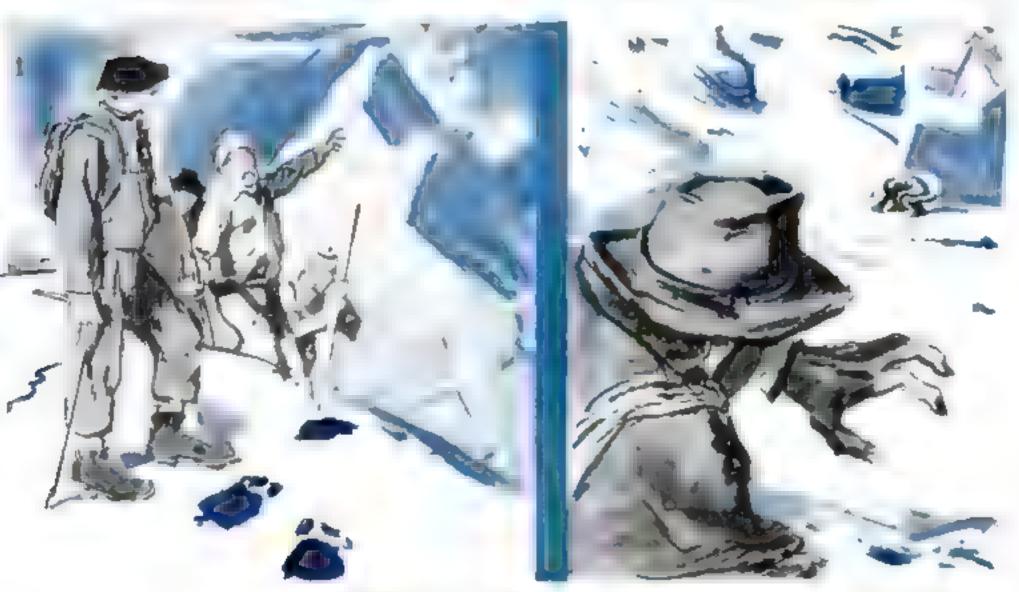

of Everest

Englishmen first tried 1921: Guardian to climb Mount Everest in 1921. Lt. Col. C. K. Howard-Bury,

their leader, saw tracks "like those of a barefooted man"—made, his porters told him, by "the wild men of the snows." The yeti (snow-men) live, the natives said, in the highest places; some on the peaks themselves. One, they thought, guarded Mount Everest.

1925: A witness who couldn't believe it

A. N. Tombazi, in Sikkim (where Col. Waddell first

found the tracks), saw a "figure exactly like a human being's" Afterward: ". . . I examined the footprints . . . in shape like those of a man . . . " Tombazi, amazed, knew he might not be believed. So he published his report [Please turn the page] privately.



1937: The steps Hunt probed the difficut in the ice


Famous climber John cult and dangerous Zemu gap. He was

startled to find two lines of the manlike prints winding their way through the mountains. He was more startled to find that steps had been cut into an ice slope. He used the steps himself. He assumed climbers had been there, was bewildered to learn none had been anywhere near.

a snowman bit

World War II halted 1948: The man the search for the snowman for 10 years. But in 1948, two Norwegian

engineers, Aage Thorberg and Jan Frostis, sought uranium in the Zemu glacier, Suddenly two dark, hairy beasts-looking, they said, like grant monkeys-set upon them. One bit Frostis' shoulder. Both men were dazed but tried to lasso the sinister creatures. They failed.

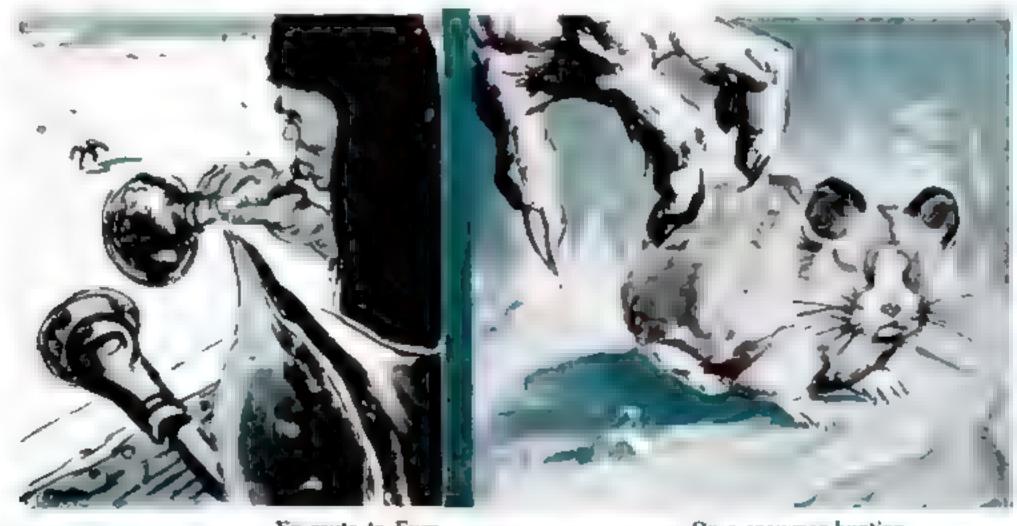

1953: "Sometimes on all fours"

En route to Everest with his party that climbed it, John Hunt, the

leader, stopped at a monastery. Monks said a snowman had been there and had hung around for several days. From inside the monastery, they had watched it. Sometimes it walked upright, sometimes on all fours. The monks finally scared it away by blowing on their long horns.

1954: A human characteristic

On a snowman-hunting party, Charles Stonor followed tracks close enough behind a snow-

man to get a possible clue to his diet. Stonor found the remains of a bare. It had been disemboweled. No beast or bird of prey leaves the entrails of its kill. This is a human trait. It suggests that the snowman might be a missing link, a primitive man, or much-advanced great ape.



1951: Snowman leads a crevasse

Another near-miss came when lamed Himalayan explorer Eric Shipton found

fresh tracks at 19,000 feet, brought back convincing photos. He followed the trail for several miles, the longest set of tracks yet—to lose it on rock and debris. One track showed the creature's great climbing ability. The yetf had jumped a wide chasm, anchored itself on the other side.

1952: Hillary misses a chance

Edmund Hillary was climbing in the Himelayas when his Sherpa guide, Ang Pemba,

picked up a tuft of long black hairs—thick and coarse. "Yeti, Sahib, yetil" cried Pemba. Hillary wanted to bring back the tuft for analysis. But Pemba threw it over a bluff. It would be bad luck, the Tibetan guide said, to keep it; it would make the snowman angry at the Sherpa tribe.



1954: Founda look-alike

Stonor showed native Sherpas photographs of orangutans and many other animals so the

Sherpas, many of whom claim to have seen the snowman, might point out any similar creature. Some at once called the pictures of orangutans those of snowmen. Others said the snowman looked like orangutans-but wasn't quite the same. No other animal was even considered.

will be found"


Zoologist Leon August 1955-8: "Proof Hausman of Rutgers U. (N.J.) studied an alleged snowman scalp.

said it belonged to an unknown mammal. In 1957, a Texas party searched for the snowman and found none. But, says Sir John Hunt: "I believe in the yeti. I have seen its tracks, heard its yelping call." Proof to answer doubts, says Hunt, is only a matter of time.

The Dangerous Job of Moving Oil



Morning parade along catwalk is to bosun's locker for clean-up gear to keep tanker shipshape.

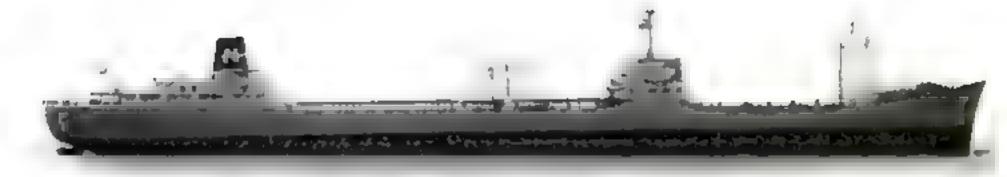

With 45,000 tons of explosive cargo, this giant tanker sails the seas to help quench the world's insatiable thirst for oil

By David R. Lindsay

T WAS 0236 on a star-filled morning when two tugs nosed the bow of the L largest cargo vessel ever built in the United States into the slip at Amuay Bay, Venezuela. The pilot, who had never seen so huge a vessel as the new supertanker World Beauty, played it safe and had her dead in the water when she was only part way in. Then her mooring winch took over, pulling her in by her tree-thick lines. Too long for the dock, she stuck out into the bay astern and her midship connections missed the loading station by a couple of hose lengths. The Beauty's overall length is 736 feet, more than twice as long as two football fields. Her beam of 102 feet got her a two-vessel slip to herself.

The floodlights on the pier and the chains of bright white lights on the refinery on the hill added a look of urgency. Because so many major oil fields are located in far corners—the edge of South America, the Arabian desert, the East Indian archipelago—the world's 3,000 tankers work around the clock trying to keep up with civilization's thirst for fuel. Oil carriers make up half of the merchant tonnage afloat today and every year the oil fleets expand as bigger and bigger tankers are launched. The reason for the growth in size is economic: The bigger the tanker, the more oil she can carry per dollar of wages and fuel. So today supertankers are the mistresses of the seas. Trailing the World Beauty's chief mate, Martin Meseck, during her maiden voyage, I learned why the life of a modern tankerman is so rugged and exciting.

The \$12,000,000 World Beauty was less than a week out of her Massachusetts birthplace when she tied up at the Creole Petroleum Corp. dock, but her captain was already fretting. The giant tanker had to swing at anchor for a day and a half while the Amuay storage tanks accumlated enough crude oil to fill her up. At \$3,500 a day for operating charges, that's an expensive wait,


When the mooring lines were secured, Chief Mate Meseck left his docking post on the fo'c'sle. As the ship's general manager, he has one job he can't delegate: watching the loading and unloading of cargo and ballast. To keep the Beauty from blowing around like a balloon, she'd left with half a hullful of Boston harbor water. Now it had to be dumped before the tanks could be filled with oil.

Taking cargo on a tanker is complex and risky, as I'd learned from the disaster stories swapped over the dinner table by Captain Johann Masuch, the chief mate, and the chief engineer. (The conversations were in a combination of English and German. Like many a tanker, the Beauty is practically a United Nations: Built in America for Greek shipping magnate Stavros Niarchos, she flies the Liberian flag, was chartered for this voyage to a British company, and was manned by a German crew.)

Would we have trouble? At Amuay Bay another tanker, the Herbert G. Wiley, had been sunk by a fire and explosion,

CHECKING THE OIL LEVEL: Chief Mate Martin Meseck aims a sparkproof flashlight down a tank hatch as the World Beauty takes on her 45,000-ton liquid cargo at Amusy Bay in Venezuela.



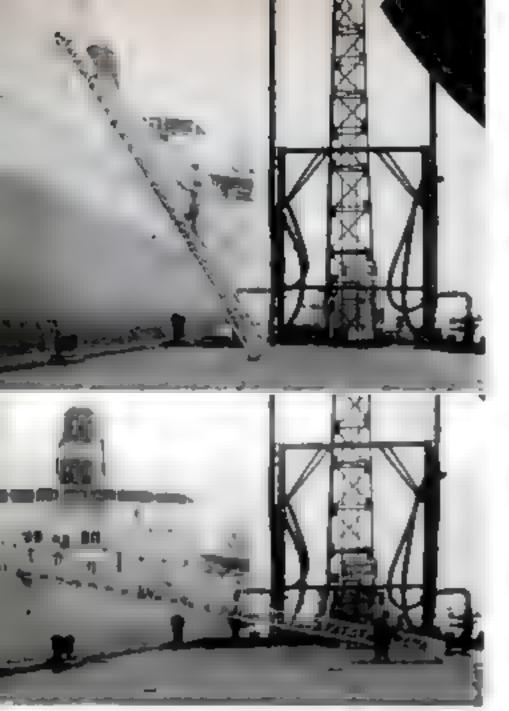

WATER BALLAST PUMPED OUT, the World Beauty rides high above the dock, her gangway almost vertical. As her tanks drink oil, however, she settles deep down into the water.

origin unknown. At nearby Aruba one had been lost when a wrench dropping onto the steel dock had sparked off an explosion.

When disaster strikes, it strikes fast. On March 7 of this year, the Navy tanker Mission San Francisco collided with a small freighter, Elna II, in murky weather in Delaware Bay. The Mission exploded, burned, and sank so fast that 10 tankermen were lost, though the explosion occurred so close to the Delaware coast that street lights on shore were knocked out.

The danger is in the explosive vapors. Crude oil, which the World Beauty was to carry, has components more volatile and inflammable even than gasoline.

An oil carrier, Meseck told me, can't be pumped full all at once because her stern tanks would overflow before her forward ones were full. Instead she has to be loaded tank by tank; valves must be opened and shut with split-second timing. The Beauty would be receiving crude at the rate of a million and a half gallons an

"You could see explosive

hour, rushing through the hoses at 30 to 40 m.p.h. A miscalculation could burst a hose or shoot a geyser of oil mast high, with the possibility of a fiery death for all aboard.

Accompanied by the pumpman, whom he always called "Poomps," Meseck clambered over the black pipelines on deck as he made his way to the pumproom by the after deckhouse. There is a mile of cargo pipe aboard the Beauty. The lines are controlled by 103 valve wheels on deck and another 52 inside the pumproom, which has a Rube Goldbergian tangle of pipes, from 16- and 14-inchers down to tiny gauge tubes. Handles all have brass identification plates and are painted in a color code—yellow rims for cargo valves; black spokes for crossover lines, red for port tanks, etc. But like virtuosos, the two men played the valves without looking. Five minutes after the last mooring line had been made fast came the whine of the turbine pumpe discharging ballast.

To stall of trouble, a procession of seamen was moving aft along the deck, carrying large wooden plugs. These they stuck into the scuppers (drain holes) so that oil spilled on deck wouldn't run overboard to spread dangerously across the water.

While the ship's crew was putting the 30-foot gangway over the side, men on the dock were hooking up extra lengths of hose. The empty Beauty rode so high that her gangway became a ladder. Her own cargo booms had to help lift the heavy hoses aboard.

Well after daylight, when it was beginning to get hot, James Ross from the refinery came aboard, and told Meseck what cargo the ship would get: a split load, 13,000 long tons of a premium crude for making lubricating oil and 27,000 tons of ordinary crude

Meseck was having trouble sucking out the last of the ballast with the stripping pumps. He went down into the tanks themselves. At the bottom of one tank, he found what was wrong: A small piece of sheet metal, left by the builders, was blocking the suction line.

At 0941, with everything set, Meseck gave the word to the men at the dockside to start the oil flowing. He rushed to the

vapors escaping like heat waves off a sun-baked road"


inspection opening on a tank and looked in. He and Poomps took turns peering down. After a short wait, Poomps spread a red bandanna over the six-inch hole. It fluttered. When the oil starts through the pipelines, it pushes air out and you can feel the wind, Suddenly, at 0944, Meseck and Poomps grinned at each other. The World Beauty's first oil was aboard. You could smell it.

When all the hoses were shaking with oil, the chief mate went to his room to calculate how high to fill the tanks. The only way he can tell how much oil he has is to measure from the top of the liquid to the top of the hatch. Taking these soundings is called "taking the ullages," and the tools are a weighted steel tape for the measurements and a sparkproof flashlight for looking into the unlighted tanks. To reduce sloshing, tanks should be nearly but not quite full. Roughly a foot of air space is left for expansion of the oil.

The captain was disappointed that his ship had been assigned only 40,000 tons of cargo when she could carry nearly 45,000. In answer to a cable, the ship's agents sent word to take a full load. Then Meseck had to do his figuring again, this time taking into account the ship's draft. Engraved on the side plates are Plimsoll marks showing how deeply the ship may be loaded in different oceans at different seasons. Since payment is by the ton, and an inch of draft is equivalent to 142 tons of cargo on the Beauty, the goal was to load to the limit.

That afternoon, while off-watch seamen atrolled ashore for a few hours, Meseck had the watch on the go. Men were stationed at ullage openings and valves. As the rising black tide was reported nearing the top of a tank, Meseck, Poomps and several others would converge on that part of the deck. Commands were shouted. Men in pairs spun yellow-painted valve wheels. Poomps darted from hatch to hatch in a permanent crouch.

You could see explosive vapors escaping, like heat waves off a sun-baked road, as Poomps opened uliage holes. Smoking is prohibited on the main deck at any time even though, when the hatches are closed, the vapors are led up pipes to be dissipated 30 feet in the air.

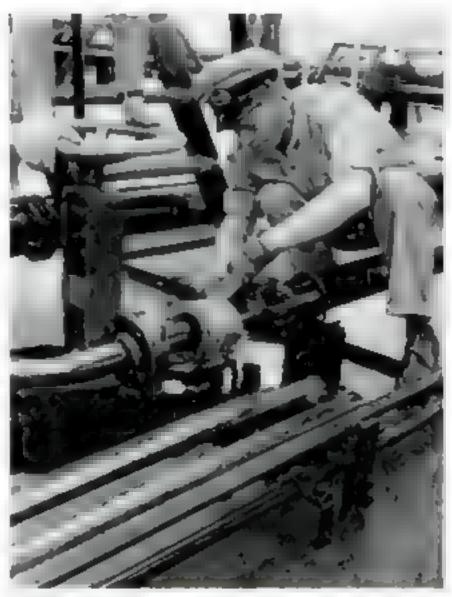

LEAKING OIL, seen as a black smudge under the mate's bands, is an ever-threatening fire hazard. Faulty connections, like this one, are repaired immediately and the oil swabbed up.

Oil was still coming aboard at midnight when a man wheeled on a squeaking aupermarket basket of sealed gallon cans. They were oil samples for the refinery at the other end of the trip in case there was any question of contamination of the cargo.

At 0031 the next day (Friday), Meseck told the man on the dock: "Stand by to stop pumping." After checking the draft marks, he called out, "Shut down!" Then he climbed to the bridge and shattered the night with a confirming blast on the ship's whistle.

When the World Beauty got underway at 0242, she'd loaded 44,989 tons of crude oil, the biggest cargo ever carried from Amuay Bay. The chief mate, turning in for a catnap before standing the 0400-0800 watch, had spent a wearing 27 hours on his feet.

Clear of the bay, the World Beauty headed for the Mona Passage out of the Caribbean. Once in the Atlantic she would veer northward and eastward across the ocean. On the way, her captain expected to receive orders for unloading in Europe.

Unload—but where? Friday morning the possible ports were discussed. With her full cargo and deep draft, the Beauty was too big for any oil dock in Europe—except two. She could fit into Green Island on the Thames below London and into Fawley below Southampton. On the continent there was no place deep enough to take her.

The first job of the day for the deck crew was cleaning up. Despite drip buckets under the hose connections, oil had been spilled and the paint scraped off where the hoses had been dragged around.

With sawdust, rags and swabs, the crew started what would become for them a familiar routine—mopping up the dangerous black coze.

Another chore was to trim ship. When she'd gotten underway, she'd been down by the head. To get her stern deeper than her bow, oil was transferred by gravity from full tanks forward to partly filled ones aft.

Early Saturday, as daylight cracked the horizon, we sighted the lighthouse on Mona Island. By 0820, the last of the Caribbean islands were disappearing astern; the next landfall would be Eng-

land. That night torrential rains fell. Never having had a ship equipped with radar before, the captain spent an hour tracking rain equalls on the 'scope.

Sunday was no day of rest. It started with emergency work, Black splotches of the inflammable cargo had been found on the main deck. Three leaks were discovered—the ship had been working mildly in the gradually increasing seas. Men hurried around cleaning up, while Poomps and the bosun sweated up the bolts on a leaking pipe flange.

Tuesday evening, the daily weather broadcast reported a low-pressure area with strong winds ahead. By Wednesday the sea was kicking up more. The ship slid down the face of quartering swells and splashed spray sky-high. Despite the

white-capped swells, the deep-sitting Beauty never rolled more than six or seven degrees. But her working started two more oil leaks—luckily, small.

At dinner that night, the captain and a company observer discussed the unpopularity of giant tankers with seamen. The captain said he wouldn't be surprised if some of the crew wanted off at the first port.

On Thursday came two more reminders of the peril of oil at sea. First, the captain noticed that the insulation on the floodlight wires on the bridge was worn through. The same type of light was also

mounted next to the tank vents aloft. Worn insulation there, the captain observed, would be more dangerous than smoking on the main deck, or dropping dynamite. A hasty check showed that the rigging wires were undamaged.

A second alarm came that night when thick fog closed in. Suddenly the radar showed a target dead ahead The captain changed course to pass it half a mile abeam. We heard its whistle, but we never saw its lights.

Thursday was also the day the ship learned definitely that Fawley, England, was to be

her unloading port.

Friday, a week out of Amuay, Meseck inspected the cofferdams, three-foot safety compartments extending the breadth and depth of the ship and separating the tanks from the rest of the hull. They are supposed to be empty. They were. He also inspected the Butterworth machines, complicated nozzles that spin streams of water around to clean tanks. Operated at 150-pound pressure with nearly boiling water, they knock residue and scale off the tank plates—but they're as tricky to handle as a boa constrictor

Poomps and his assistant made the rounds of the tanks, taking cargo temperatures with thermometers on long strings. (The cargo was supposed to be kept



PLIMSOLL MARKS are checked by Capt, Masuch and British official on arrival at Fawley, England. If ship is overloaded, captain risks a beavy fine.

[Continued on page 216]

New Ideas from the Inventors



1 Chipped ice Chips ice. To remove the hard, slick film that remains after surface ice is scraped off a road or runway, this machine would use ice itself as

an abrasive. Chunks plowed off the top would be pulverized, then sprayed over the thin but hard-frozen bottom layer through a high-velocity jet.

2 Magnets Hold Extra Lenses. Closeup lenses could be quickly added to regular glasses—and removed just as quickly—if the frames and lenses were fitted with magnetic inserts. Tiny pockets in the temples (also with magnetic holders) would store lenses between uses. 3 Brush Apron Catches Drips. A flared skirt around the ferrule of this brush would trap the paint that often drips down when bristles are pointed up. The handle—and your hand—would stay cleaner when you painted overhead, and drippings could be returned to the can.



Please turn the page for more new ideas

More Inventors' Ideas



4 Balloon Streamlines Truck. To gain extra speed or power on the open road, the driver of this truck could just inflate a streamlined tailpiece. The balloon wouldn't affect cargo space, and it could be quickly collapsed for easier maneuvering through towns or traffic,

6 Tree Decoration Fights Fire. Christmas-tree fires might take less of a toll if trees were trimmed with fire extinguishers. These glass balls, filled with flame-



5 Baby Slides on Rails. Instead of lifting Junior out of this folding carriage, using excess energy and maybe waking him, you'd just slide him out—and back in again—smoothly. Retaining rails would tilt to allow the bassinet to slide off at the most convenient angle.

quenching liquid, would be suspended from fusible hooks. Heat would cause the fragile shells to drop—and to spatter their contents on a burning tree.





7 Hanger Clips on Chair. Your jacket wouldn't get bunched at the neck if you slipped it over a chair with a shoulder-draped back. Brackets attached to a conventional (or hookless) hanger would let you turn almost any chair into a convenient overnight clothing stand.

B Trunk Light Flashes Werning. This blinker would flash a danger signal if you had to stop for roadside repairs. Hinged inside the raised trunk lid, the blinker would be clearly visible to oncoming cars. Swinging the light downward would disconnect the flasher and aim a steady beam into the trunk.






Jacket Camouflages Hunter. A waterfowl hunter who didn't find enough
natural cover at the water's edge might
bring along a plentiful extra supply if
he had a jacket like the one shown here.
Loops stitched to the front and back
panels of the coat could hold long stalks
of rushes or other concealing vegetation.


The following patents have even such an these inventions I Patent No. 1881-814 to II 4 Ion min. It bouton, Ohio, 2 No. 2 to 1812 to 1 I tonnor Ierarkana Iera 4 No. 2 "1", 411 to R. B. Potter Bouter Cola., 5 No. 2731.928 to 4 M. Pondreau Gardner, Mass., 6 No. 2,800 to R. Lehder Stumped Cons.; 7 No. 2 34.638 to 4 Fedman Wood ide, R.), 8 2,736.005 to 6 L. Craddock N. Housewood Cols.; 9 No. 2,741,348 to 6 F. Smith Pate Archae Ira.

Copies of paients may be ordered, by number, from the Commissioner of Patence Rashington 25 DC at 25 cents each To unite to an inventor of the address given shore as in afficient you may address him the name and patent numbers to an are of the Commissioner of Patent

The Shocking Facts on Car Theft

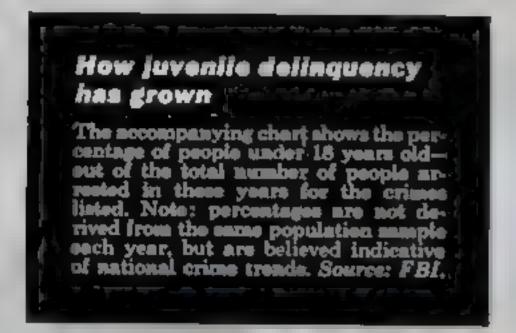



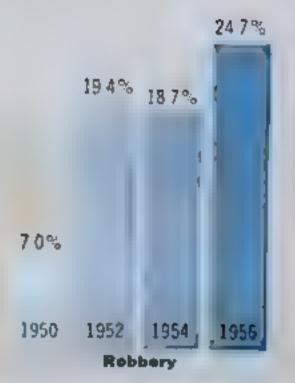



UNITED STATES DEPARTMENT OF JUSTICE PAREAL SUBBAU OF INVESTIGATION

MARRIMGTON 25, 2- C

im Reply, Plane highe in File No.


manulaughter

The theft of automobiles ranks as one of the most perplexing and widespread criminal problems facing the law enforcement agencies of the United States today. During the past five years, more than one million vehicles valued at over one billion dollars were stolen. This wholesale thievery means that during that period approximately two automobiles were stolen every live manutes.

I lest that "Popular Science" magazine is performing a much needed public service by printing this article which emphasizes the simple things which car owners can do to assist law enforcement in suppressing this transmissably costly crime against property.

Uphn Edgar Bover
Director

How can you protect
your car? Here's
what one expert
says: "Learn how
car thieves operate
—then take steps
to make sure
they don't operate
on yours."

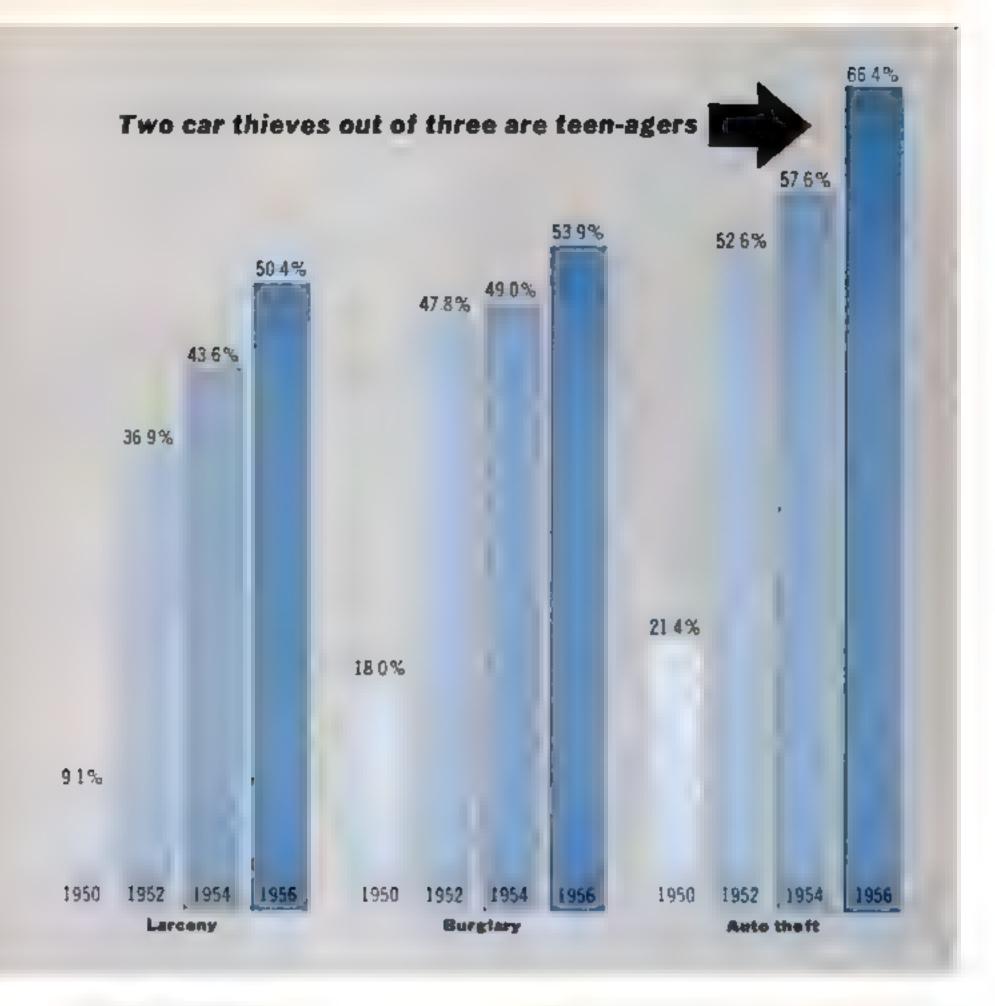

By Max Gunther

record 263,720 motor vehicles were stolen in the U. S. last year—230 million dollars' worth. This was a 16.1-percent rise over 1955's figure of 227,150. All indications point to still more auto thefts in 1957.

Almost all kinds of crime increased last year. But auto theft led the field by a mile. No other type of crime increased by half that much. Thefts of auto accessories—tires, fog lights, radios, hubcaps—showed an even more shocking rise. In a study of this crime in 436

cities, the FBI reported a jump of more than 41 percent from 1955 to 1956.

In part, these increases are a result of growing population and car-ownership—but only in part. By far the biggest reason is juvenile delinquency.

Never before have so many teen-age auto thieves been on the prowl. All kinds of juvenile delinquency have increased alarmingly in the past two years; but no crime has attracted a bigger percentage of youngsters than auto theft. Of all people arrested for car-stealing last year, the Federal Bureau of Investigation reports, two-thirds were less than 18 years old.

For a picture of what's going on,

glance at the record in Cincinnati. Of 146 people arrested in that city for carstealing back in 1948, roughly a fifth were juveniles under 18. Of 265 arrested for the crime last year, more than three-fifths were juveniles. There were actually fewer adults in Cincinnati's car-theft picture last year than in 1948—yet the number of thefts almost doubled.

"Auto theft in Cincinnati today," says Police Chief Stanley R. Schrotel, "is primarily a youth crime." St. Louis police records show that 91 percent of all those arrested for car-stealing in the city last year were 16 or younger.

Why are so many kids stealing cars?

"It sounds funny to put it this way," says a New York police official, "but it's all you can say: They're stealing cars for the sheer hell of it."

The FBI agrees. Car thefts are divided into three main categories: A car may be stolen (1) for sale, (2) for use in committing another crime, or (3) for fun. This last category—joyriding—has become by far the most common kind of auto theft. In a survey of 125 cities, the FBI

found that 59.3 percent of car thefts last

year were joyrides.

"Almost invariably," says an FBI officer, "a joyride begins with a bunch of youngsters hanging around with nothing to do, looking for a thrill." Sometimes the whole group will steal a car, ride around in it for a night and abandon it. At other times, the car will be stolen by one or two members of the gang on a dare or bet. The car is abandoned eventually—often badly damaged.

To a lesser extent, youngsters also steal cars and accessories for sale. In some parts of the country organized carthest rings pay boys to bring in cars. There are used-car and junk dealers in most cities who will buy stolen cars and accessories—paying low prices but asking no questions.

Happily for car owners, a high percentage of stolen cars—93 percent last year —are recovered. Even so, the man whose car is lifted faces plenty of trouble. If your car is stolen, you may be without it for months. When you get it back damaged or wrecked, you may find that your insurance policy doesn't cover you. If joyriders have damaged someone else's car with yours, you may not be covered for your liability, either.

How can you protect your car? One basic piece of advice is offered by Sergeant William Fyffe, former auto-theft expert of the New York police and now consultant to Babaco Alarm Systems, Inc. Says Fyffe: "Know your enemy. Learn how thieves operate, then take

steps to make sure they don't operate on your

car."

The favorite hunting ground of thieves—pros and joyriders alike—is a dark street. So don't park on a street any more than you have to, and when you do, park near a street lamp or stores. Lock both ignition and doors. A locked car isn't an insuperable barrier to a thief, but an open car is an invitation.

If your car is more than eight or 10 years old, or if it's a con-

old, or if it's a conspicuous vehicle—such as a rare sports car—it isn't as prone to theft as newer or more common autos. But if it falls in neither category, the season on it is open. Police say that joyriders are likely to take the first car they come across that looks easy to steal—one with its doors open, or one parked where it can be worked on easily.

"A thief's first problem," says Sergeant Fyffe, "is to get inside your car." No matter how easy it is for him to lift the hood and jump the ignition, he's licked if he can't then get behind the wheel to

drive away.

If you have a convertible, the thief can make a small, inconspicuous slit in the canvas top and lower a hooked wire or rod through it to grab the inside door handle. He's as good as in your car if you have the common type of lock that releases automatically when you move the

Where is your car safest?

Autos stolen in Los Angeles, 1956: Stolen from:

Alleys	81
Parking lets	2,173
Driveways	270
Private garages	221
Public garages	56
Service-station lots	257
Streets	6,368
Used-car lets	497
Vacant or private lets	419
TOTAL	10,342

Source: Los Angeles Police Dept

TOPULAR SCIENCE

How cars are stolen dutor stolen in Concessants, 1956.

Method of theft Sto en from	Mater left runn ng	Ignition locked, doors unlocked	Key left in ignition	Car broken (eta	Duplicate or sketaton key	Other	Total 619
Streets & highways "		192	232			41	
Residences	0	9	21	3	0	5	38
Commercial parking lots	1	20	48	24	0	3	96
All care stolen in city'	9	261	388	207	1	72	938

*Yores Buttom ton does not represent totals of columns, tince cars are stolen from other places than the ones mentioned here. Source Cincinnate Potica Division

inside handle. Police advise convertible owners to make the kind of lock modification sometimes used to keep kids from falling out—a latch that can only be released by pulling up the lock button.

A clever thief can still lift the button from outside the car, but joyriders generally won't go to that much trouble. A further protection is to take the buttons off. The slim shafts remaining are virtually impossible for a thief to manipulate from outside, but you can still work them with your fingers.

A thief can get into a sedan fairly easily, too. If your outside door handles are of the pivot rather than thumb-button type, and if they're the kind that stay rigid when locked instead of disengaging from the latch mechanism and turning loosely, watch out. A thief could force one of them open by wrenching it sharply with a length of pipe

"Probably the favorite point of entry into a locked car," says an FBI official, "is the vent window." A thief may wedge the window barely open with a screwdriver, then push a bent piece of coathanger wire through the slit to release the vent catch. If he's foiled by a lock on the catch, or if the vent is the kind that has to be cranked open instead of merely pushed, the thief may use force instead of finesse. Using a screwdriver or a beer-can opener, he'll lever the vent open until the catch snaps off or the crank mechanism gives.

One way to beat thieves at the ventwindow game is to drill a hole in the window frame just inside the forward, or inward-opening, edge of each vent. Then, whenever you have cause to be especially worried about theft, drive a sheet-metal screw into the hole so that the screwhead is snug up against the vent's metal frame. This will help the catch hold the vent closed. Faced with this, the thief may simply smash the vent glass—but on the other hand, he may simply walk away. A car with a broken-out vent is likely to arouse suspicion.

The thief's next problem, once in your car, is to close the ignition circuit. He

NEXT MONTH: Why is your son four times as likely to get into trouble as your daughter? Read: "Why Girls Are So Good" in January PS.

may do this under the instrument panel or under the hood. If you have the older type of ignition switch with an armored cable, he'll probably have to work under the hood—but police say this is no problem if he knows his automotive wiring. If he's fast, he'll be driving your car off in a few minutes.

You can foil him by installing an extra ignition switch in some secret place. Police authorities think the best idea might be for Detroit to develop a switch that not only breaks the electrical circuit but also mechanically locks some vital engine part such as the distributor rotor. They also suggest a hand-brake lock,

What can you do to protect your outside-the-car accessories—tires, spotlight, hubcaps? Almost nothing (except in the case of some bolt-on accessories; you can file away screw slots and burr bolt threads). The worst hours for car and accessory theft are those between dusk and midnight. In this period, if possible, get your car off the street.



How Good Are the Shops in Your Youngster's School?

Your youngster can learn a trade in high school—if he gets the right kind of vocational training. Here's how to check

By Erik H. Arctander

HE United States now has 8,200,-000 skilled craftsmen. By 1965 we'll need 10,200,000.

You don't have to study statistics to get the idea. Help-wanted ads reveal the demand for all kinds of craftsmen: machinists, appliance repairmen, sheet-metal workers, tool-and-die makers, auto mechanics.

These jobs are among the finest your son can aspire to. They are steady, secure, challenging. The pay is excellent. It has risen sharply since World War II to approach that of college-trained professionals. It will increase still more.

There's a catch, though. Jobs like these require training—lots of it. Your boy should be able to get some of this skill-education in high school. Can he?

To find out what schools are doing to help likely youngsters get started as skilled craftsmen I questioned leading officials in education, government, business and unions. Then, to see for myself, I visited some of the outstanding school shops in the country.

What I found was not one system of school shops but two:

Industrial-arts shops are provided by ordinary high schools for all boys, whether they plan to become machinists, lawyers or poets. They introduce the youth of America to the tools and machines that keep America running. They may steer some boys toward careers in

the skilled crafts. But they are not intended as training for those careers.

Vocational-training shops are specialized. Each one is part of a separate educational program. They do teach youngsters a trade—auto repair, aircraft maintenance, sheet-metal work. They prepare students to take on adult work, not necessarily as fully qualified journeymen, but with more-than-rudimentary competence.

What's a vocational high school like? I visited one of the finest in the country, a \$10,000,000 layout occupying two city blocks in Milwaukee. I saw bright, spacious shops, each with its classroom.

Here, future auto mechanics study in a real service garage with big roll-up doors, a car-size elevator, exhaust hoses built into the floor.

Metallurgy students have heat-treating furnaces, strength-testing machines, even a complete X-ray lab. For boys studying other trades there are diesel engines, welding booths, a patternmaking shop, a small foundry, even a complete television station (WMVS-TV, channel 10).

The Milwaukee school is completely independent, with its own buildings, budget and school board.

In small cities, the vocational high school is often in the same building as the general high school. Besides city vocational high schools there are also "area" schools run by state or county governments, or by groups of municipalities working together.

Whatever the setup, vocational high

A vocational school can waste your son's

schools are quite different from the more familiar general type:


 They cost more to equip and operate. The cost per student is 20 percent greater, as much as \$700 a year.

 The school day is an hour longer. Students spend one-half to three-quarters of the time in shops, the rest in class. The teachers are different—they are


drawn from industry and most are also trained in special vocational-teachers'

colleges.

How good are they? In the 40-odd years of its existence, vocational education has done an outstanding job in some places, training diesel mechanics in Milwaukee for Nordberg Diesel, electrical a few examples.

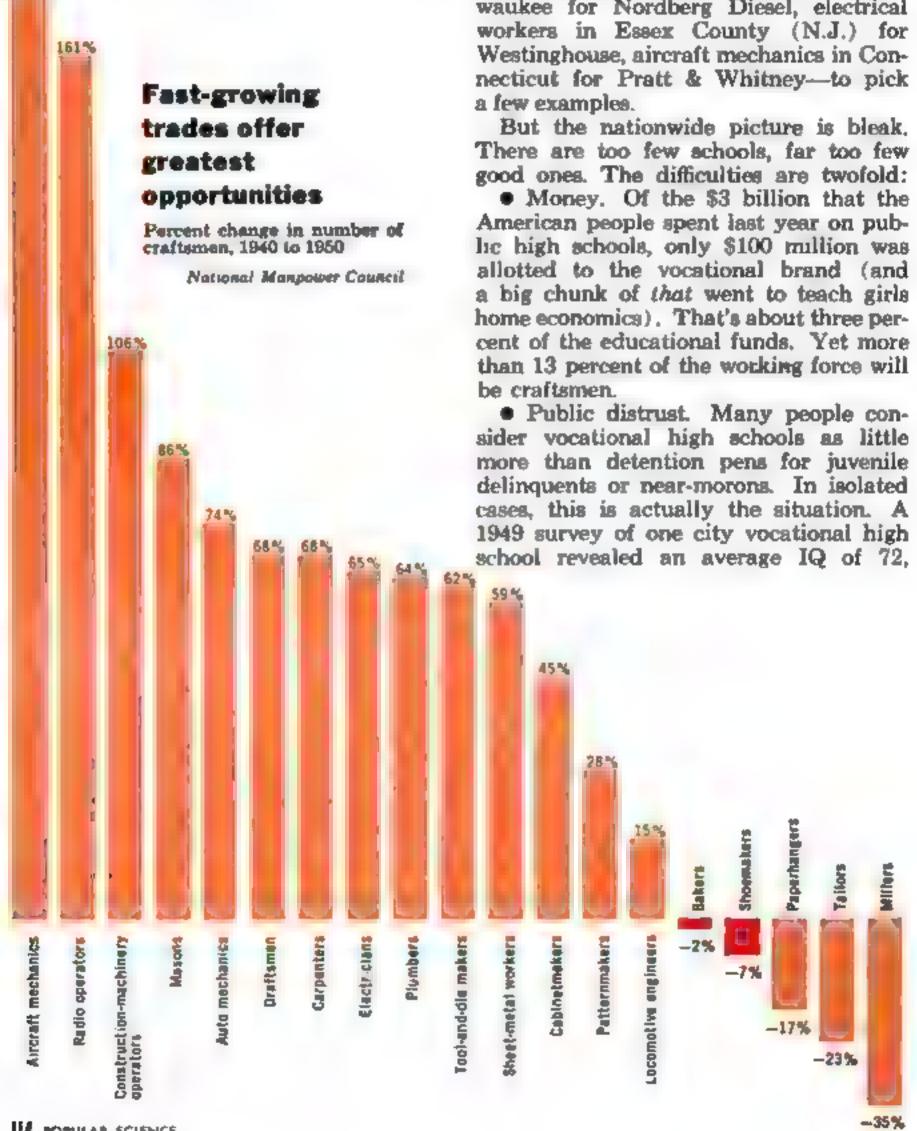

time-or lead to a skilled job at high pay

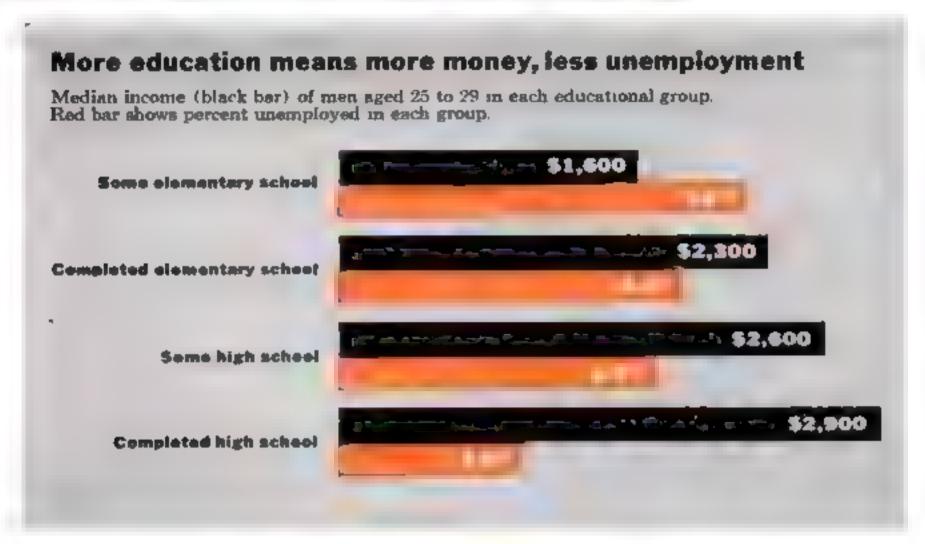

way below "normal." But a school like this is the rotten apple that spoils the barrel. The National Manpower Council surveyed vocational students around the country and found their average IQ to be about equal to the average for the general population.

"Parents who want their kids to enter a white-collar occupation are the main problem," Prof. Hamden L. Forkner of Teachers College, Columbia University, told me. "They think of vocational education as a kind of last resort; if a boy doesn't get along well in regular schoolwork he can at least succeed in a trade"

Is your boy a good prospect for a vocational high school? A couple of do's and don'ts will serve as guideposts.

Don't consider a vocational high school just because your boy can't master English and math. Vocational schools have no magic recipe for converting poor students into \$200-a-week tool-and-die men.

Don't sign your boy up for vocational training if his talents and desires suit him to a college education. He can't

get into college on the strength of most vocational diplomas.

Do investigate vocational training if your son enjoys working with his hands and is good at it. Most schools test students to measure these characteristics. If your local schools do not, you can get expert advice from an outside testing agency (see July PS: "How to Help Your Youngster Choose a Career").

Do urge your boy to enroll if the vocational program is up to date, practical and thorough.

Where to enroll? You're lucky if you have a good vocational high school nearby. Half of all vocational students are concentrated in only seven states. In six states—Connecticut, Louisiana, Georgia, Alabama, California and Kentucky—vocational training is available to all residents. The states themselves run the schools. Georgia, with only two state schools, provides dormitories for students whose homes are beyond the commuting distance. If you live in one of [Continued on page 224]

Next Month: Can Your Son Learn a Trade in the Service?


The armed forces train thousands of young men—and women—in technical skills that are prized in civilian life. Can your youngster use this route to a good career? See January PS for the facts.




Aircraft furboprops on its deck power Liberty ship

Four turboprop engines totaling 24,000 hp. propel this converted Liberty ship in a Navy experiment. The regular propeller of the YAG-37 (former SS John L. Sullivan) was removed, the old engine shut down, and the plane motors—two on the foredeck and two aft—installed

Picture News

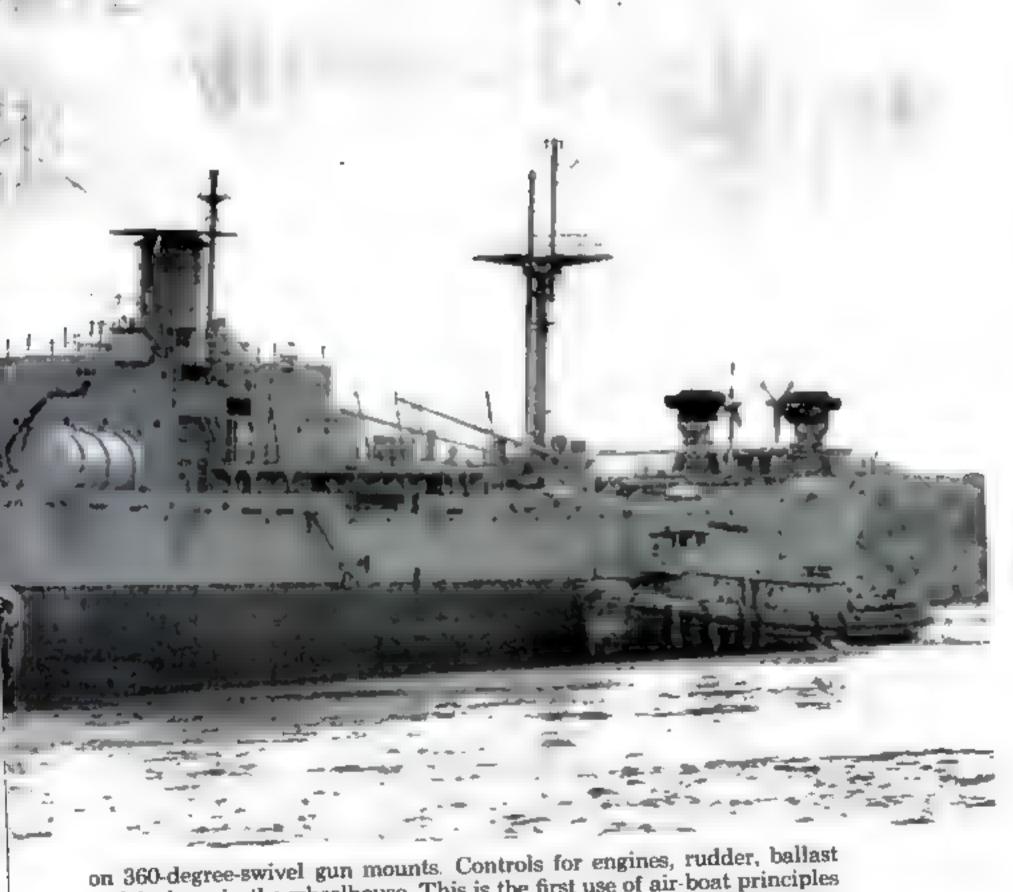

on 360-degree-swivel gun mounts. Controls for engines, rudder, ballast and fuel are in the wheelhouse. This is the first use of air-boat principles on a major ocean vessel. It moves propulsion from a vulnerable underwater area and halves the crew to 20. Here the YAG-37 is under tow from Rawls Brothers shippard in Jacksonville, Fla., for Navy tests.

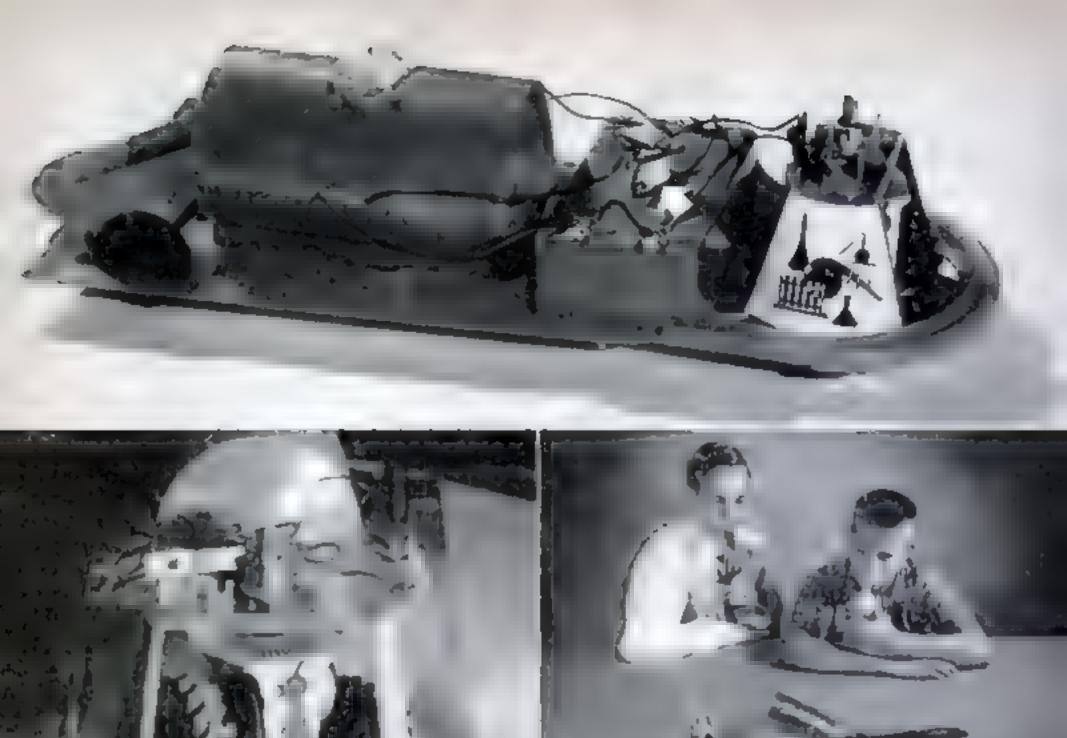

Sound waves steer toy car by remote control

A PLASTIC disk vibrating on top of a resonator (arrow, top photo directs or reverses this car at the sound of a whistle. Blowing over a half filled pop bottle also controls it. The vibrator dances on contact points in a flashlight battery circuit to control the wheel assembly left). Tigrett Industries, Jackson, Tenn, designed the sonic toy.

Widest self-supporting roof spans 150 feet

MADE of 10-foot steel panels bolted together, the full-size pilot roof below stretches 150 feet without need of pillars, trusses or other supports. Wonder Building Corp. of America calls it the widest clear span roof in the world, prefabricates them for big arenas and aircraft hangars.







Pipeline bridge wins title of nation's most beautiful

Top award winner this year in the annual beauty contest for new steel bridges is this one—carrying twin natural-gas pipelines across the Missouri at Plattsmouth, Neb. A jury selected by the American Institute of Steel Construction found it not only the most beautiful big bridge but "best in the show." It was praised for good taste and a simple solution.

Hinged license plate gives driver an automatic SOS

DISTURBED by reading of car holdups, Homer Grant of Independence, Mo., rigged up this call for help. A button near the floorboard dimmer switch triggers the mechanism without tipping off an unwelcome rider. It flips down the license plate and shows a distress message behind it.






308 underwater lamps illuminate airport fountain

A TOTAL of 916 fountain nozzles, plus 308 floodlamps, all under water, makes this spectacular display of a 200-foot, 350,000-gallon pool at New York's International Airport. The nozzles can spout 3,100 gallons a minute. The lights, housed in watertight aluminum, rate 118,000 watts.

Hibernating diesels get winter rest in long tunnel

When Minnesota's deep snows set in, Erie Mining Co finds protection for its diesel locomotives and their electrical instruments in an 1,800-foot tunnel on its line. Here the first section of a string of 27 heads

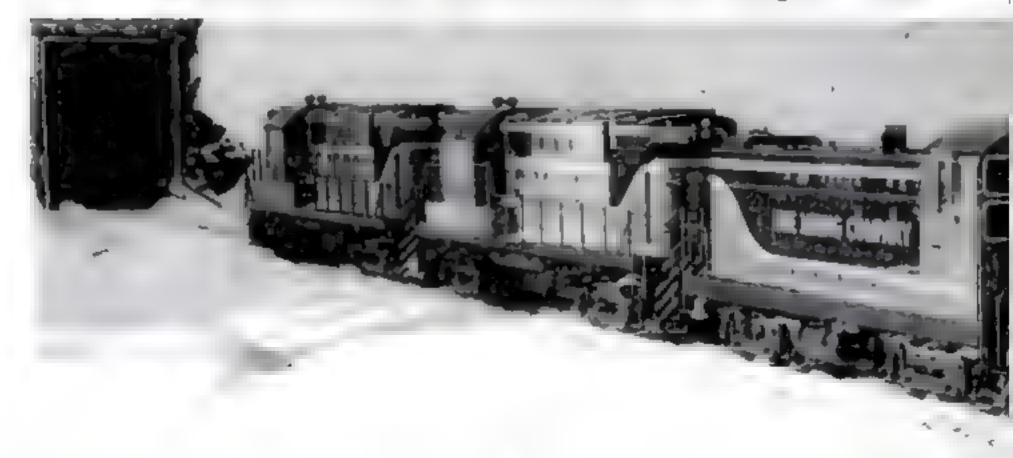



Plastic bubbles atop Paris roof increase inside light

New skylights installed on the roof of this banking establishment in Paris are made of plastic in the form of big halved balls. The spherical design is said to collect more sunlight and to distribute it evenly inside for better daytime lighting for employees on the floor beneath.

for the tunnel entrance Doors shut out the cold, but two of the diesels are started periodically to shift the others and prevent freezing of the bearings. The line hauls taconite 73 miles from plant to Lake Superior. The company hopes to shift eventually to year-'round operation.





Army's Ranger travels sideways in surf, sand, snow

WITH rear wheels that cut as sharply as the front ones, this fork-lift moves forward, backward or to the side in deep snow or soft sand. Built for Army beach and rough-ground operations by Clark Equipment Co., the Ranger has airplane-type disk brakes that can work in five feet of water. Its hydraulic, telescoping fork acts as a jack to lift it out of holes.





Air-buoyed suit keeps logger afloat

WHEN a boom man wearing this suit slips while cat walking from log to log, he is in no danger of drowning Inside the special jacket and trousers, used by Weyerhaeuser Timber loggers in the far Northwest, are airtube floats. They attach to the clothing with zippers.




Satellite with crew? By 1965, U. S. experts say

A THREE-STAGE rocket, its third stage to enter an earth orbit and return safely after two months, is proposed by Goodyear Aircraft scientists as a possibility within eight years. A modified version of an earlier design. PS, Apr. '55). Meteor Jr. would be 142 feet long, weigh 500 tons and consist of three delta-winged rockets, each with its own






crew. It would be launched at White Sands. Its booster stage would drop 300 miles away—altitude, 24 miles—its second stage 700 miles farther, 41 miles up. The third stage, with crew of three, would circle the earth 500 miles up at 16,660 m.p h., with supplies for two months and return fuel. Darrell C. Romick, head of the Goodyear group that designed it, compares its cost to that of the intercontinental B-52 bomber.

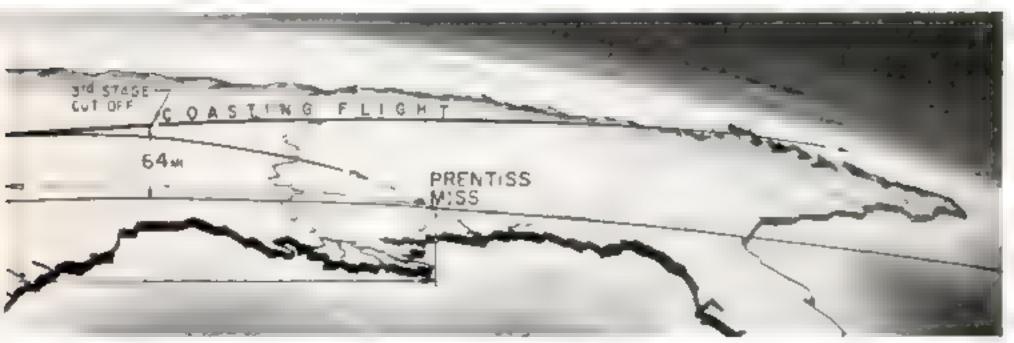

PICTURE NEWS





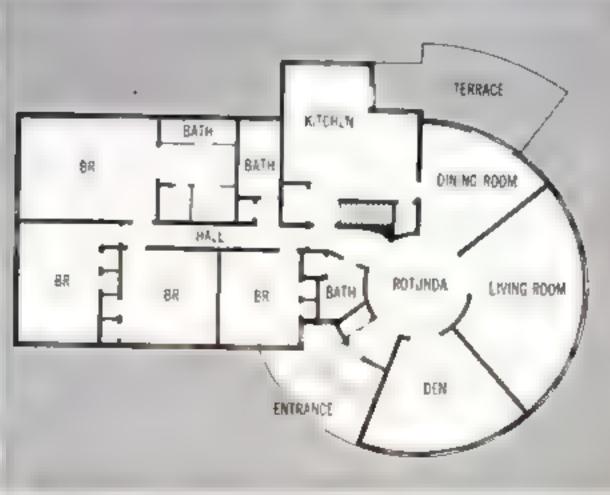

Circular house is sliced into wedge-shaped rooms

AN UNUSUAL architectural design produced this house, a model home in a development on New York's Long Island. The main section is circular, on a 21 foot radius, to enclose a wedge-shaped dining room, living room and den around a rotunda topped at the roof's apex with a transparent plastic dome. Bedrooms are in a rectangular wing. Architect Michael L. Radoslovich planned it for Country Estates, Roslyn Hills.




Outboard motor moves inboard to power racing car

A 40-HP. outboard replaces the regular engine of this lightweight sports car, which has exceeded 100 m.p.h. A four-cylinder Mercury was installed on its side (above right) with the crankshaft horizontal and the carburetors rotated 90 degrees. The exchange cut weight 110 pounds.

Rubber "toothpaste tube" converts truck to tank car

EQUIPPED with huge roll-up tubes, the trucks below can haul dry cargo one way and liquid the other. The tubes, made by U. S. Rubber of four-ply rubber-coated rayon tire fabric, are 55 inches in diameter, 35 feet long and hold 3,800 gallons. Bigger ones for rail cars and barges are planned.



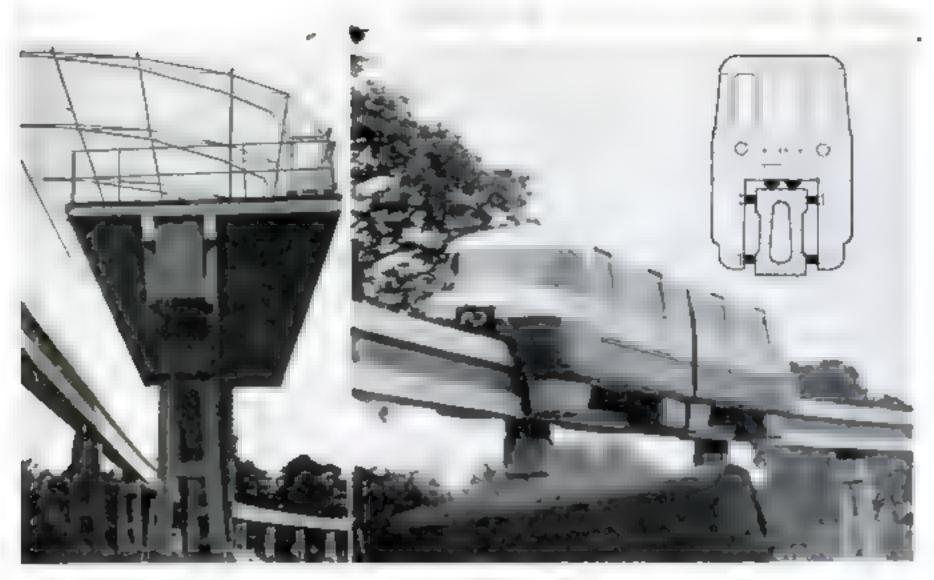

Monorall wheels cling to track on three sides

STRADDLING a concrete rail with pneumatic tires, this full-size, two-car monorail is being tried experimentally on a mile loop near Cologne. Germany The train seats more than 60, hits 50 m.p.h. on two motors, and takes sharp curves. Track and stations use little ground space.

Telephone attachment plays music while caller walts

WHEN you keep somebody holding on at the other end of the line, the attachment on the back of the phone below lets him know you haven't hung up. It's a wind-up music box. Supplied by Gayle's, New York, it entertains a travel-agency customer here while his tour is checked.





Thin chemical coating cuts reservoir evaporation

A FLAKY, insoluble chemical—hexadecanol—is being used to reduce evaporation in Western reservoirs three to eight feet a year. It is floated onto the surface from a doughnut-shaped dispenser. On 97-acre Rattle-snake Reservoir in Colorado, one eight-pound charge lasted two weeks.

Soft barrel tires let farm tractor go anywhere

BUILT to use the low-pressure Terra-Tires developed by Goodyear for military vehicles, this tractor travels over rough ground, steep slopes, snow and mud. Atwood Vacuum Machine Co., Rockford, Ill., makes it for farm, oil-field and lumber work, and in smaller utility versions.






Flickering light to hypnotize enemy? Army hopes so

Using this screened searchlight that blinked some 500 times a minute, Army and Tulane University experts tested it for hypnotic effects. They hope to develop a weapon to put enemy troops to sleep, make them sick or dizzy Tulane subjects didn't respond. The experts plan to keep trying.

Huge crusher clears acre of trees in quarter-hour

ONE man in the cab of this diesel-electric monster can batter a two-fifth-mile forest strip in 15 minutes, leaving a 20-foot path of pulp and aplinters. The 280,000-pound tree crusher was built by R. G. LeTourneau to clear jungles for farms. Motors are in the nine-foot-diameter rollers.

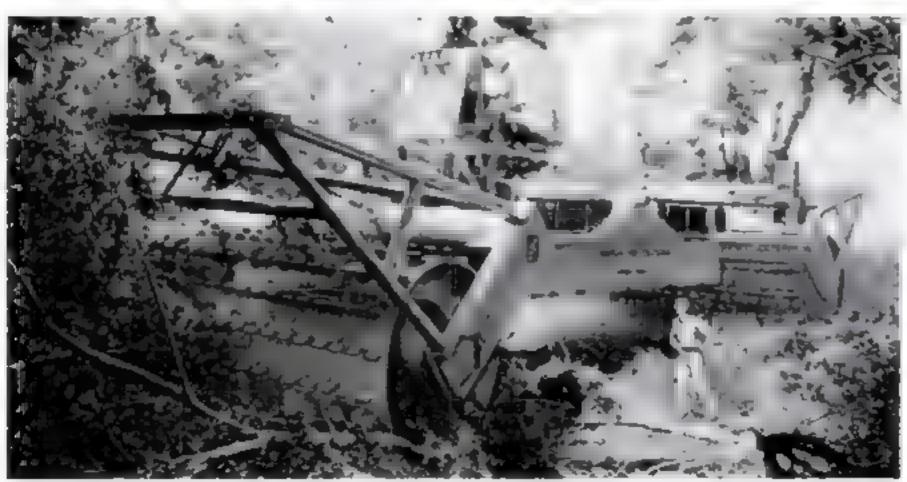



Aquatic telephones let skin divers talk under water

This swimmie-talkie uses water as a medium for sending high-frequency sound waves, on the principle of the hydrophone employed in the early 1900's for communicating between ships, and in World War I for detecting submarines. Being adjusted here on a frogman, the Aquavox includes a face-mask mike, transducer (on belt, left), transceiver (right), earphones (on thigh). Cotton Associates, Philadelphia, developed it.

New PS Feature:

A Monthly **Guide to Smart Shopping**

THIS month and every month from now on, Popular Science brings you an exclusive guide to smart shopping. You'll find articles filled with ideas on shopping wisely, complete with descriptions, specifications, prices. Look for the latest on products for your home, your car, your shop, your leisure. You're undoubtedly already familiar with the regular PS newproduct departments. The new Consumer News section bring you these plus many fresh features, showing what to look for in a product, how to keep from making a mistake, and how to save time and money.



How to

They're alike in some , vastly different in others. The problem is finding the one that suits your shaving needs

By Robert Gorman

32 POPULAR SCIENCE



Buy an Electric Shaver

O MATTER what weapon you use to whomp off your whiskers, there are four test questions by which to rate your daily shave. How clean is it? How long does it take? Does it irritate your face? How convenient is the method of operation?

To one man out of three the answers add up best with an electric shaver. Other men have tried electrics in the past and can't find a single good thing to say about them.


Now, here's news for such disillusioned one-time users and other skeptics:

Electric whisker-peelers have been getting steadily better. Among the current models, there's almost sure to be one that is right for any skin and beard.


But which one? Faster or closer machines aren't necessarily best for all, because beard patterns and skin types are individual. You can see why experiences vary so widely if you consider how shavers are alike and how they aren't.

How shavers work. All dry shavers operate on the same basic principle: They shear, or scissor, your beard. Unlike a straight or safety razor, which slices whis-


How electric shavers work: One of these three motors . . .

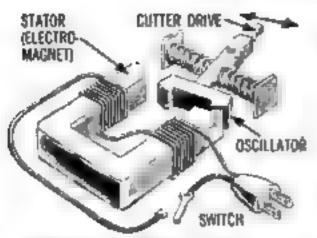

synchronous motor has a Ushaped electromagnet that alternately attracts and releases a pivoted, spring-buffered oscillator. It works off rising and falling AC-voltage pulses.

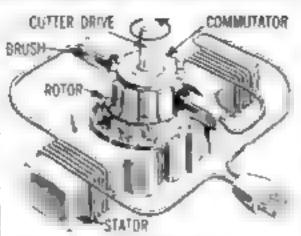

commutator motor has serieswound coils on stator and rotor. Carbon brushes, riding on commutator, make and break the circuit to produce magnetic pulses that spin the shaft.

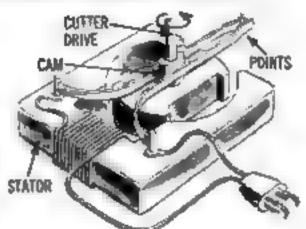

IMPULSE, or interrupter-type, motor has a lobe or cam on the rotor shaft that opens contact points twice per revolution. Resulting current make-and-break creates electromagnetic pulses.

kers, an electric traps each hair between two sharp edges and snips it off. One blade of each snipper consists of an opening in the shaver head or guard; the other is a motorized cutter that moves at high speed across the opening.

Resemblances end here. Shaver heads differ greatly in thickness as well as in size, shape, number, and arrangement of guard apertures. The cutter may be a single blade, or a cluster of them; it may oscillate from front to back, rotate like a windmill, or do its job with a reciprocating, side-to-side wiggle


The thing to note about these differences is that many of them are simply different—not better or worse. Many of the variations are the result of compromises. In trying to create shavers that will be clean, fast and free of irritation, designers must face the fact that each of these three objectives is always at war with the others.

You get a choice. Keeping in mind

Shavers Compare			STAT ONARY HEAD OR GUARD				MOVING CUTTER			
MAKE	MODEL	MFR S	Number of Heads	Th ckness	Number of Apertures	5 ze of Apertures sq. (6)	Type of Action	Speed (cycles per min)	Cutting Actions Per Second	
BULOVA	E ectr c Razor	\$35	1	0027	1 600 •	000.5	osc ating	6 500	125 000	
MORELCO	Speedshaver	\$45	2	0035	120	0009	rolary	3 300	39 600	
	Sp. 1 man	* \$15	2 .	00 35	1.0	0039	rotory	2 CDs on 1 vo 1s, 4 000 on 6 12 vo 14	04 000 00 1 ye 1s, 45 0m 00 6 12	
REMINGTON	R ect c	\$32	J	0123	755	0014	ret plocaling	8.50	~£0 000	
	AUR	. 4 1	3	Cu 3	756	chta	14. p 66. n.	8 × 0	400 000	
RONSON	1 5·A	\$29	1	<u>,4.8</u>	1 4561	0006	ret procet he	14 450	648 600	
SCH CK	Yar y	\$18	1	2025	254	601	reu procating i	71.0	173 000	
	P. War Fave	530	2	6,25	5 B	031	recupeating	91100	2 0 000	
SUNBEAM	Shavemaster	\$30	1	6 60	I 750	00.025	osc atra	6.0.0	446 000	
									-	


Notes: n.a. This information not available. *Apertures and cutting action of aux hary (side) trimmer not included in these figures.

... drives cutters in one of these three ways

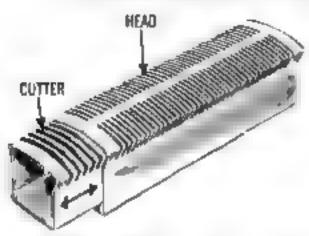


from side to side below (or inside) perforated shaver head.

One or more cutter knives whisk past each opening in the head on every cutter cycle.

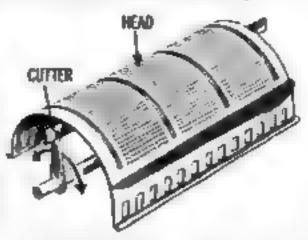

OSCILLATING action is very similar to reciprocation except that the cutter blade—or blades—sweep a wide are from front to back of the semicircular head or guard of the shaver.

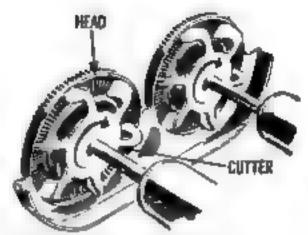

ROTARY cutter, as its name suggests, simply spins around. Unlike both other types (which move in two directions) this cutter can be driven directly by a rotary-motor shaft.

these compromises in design will help you shop. Thickness of the guard on the shaving head is important. A heavier slab of metal keeps the cutting business farther away. That may mean a shave that's less irritating—and not so close. A thinner guard could be right for the man whose skin can take a close shave.

Another compromise you might consider is the tie-in between irritation and shaving time. In order for the clippers to get at more hair more quickly, the perfo-

rations in the head should have large areas. If the holes are too large, however, an uncomfortable amount of skin may squeeze in—and get sheared—along with the beard. (If the aperture sizes in the chart seem small to you, remember that the cross-sectional area of a hair is much smaller than its diameter.)

The time it takes you to shave may also depend on the number of whisker openings in the guard and the rate at which the shearing blades whisk by. The combination (leaving aperture size out of the reckoning) may be roughly summarized in terms of cutting actions a second.

The amount of snipping that goes on is measured in astronomical numbers. In the course of an ordinary shave, the scissors may sup a hundred million times.

Obviously a lot of this action goes to waste. Each individual whisker may be chopped anywhere from two to 50 times. Then, too, cutting action doesn't have any useful effect unless hairs are poking through the apertures. But while every shaver busily shaves air a large part of the time, a higher rate of cutting still should help to shorten your daily tussle.

Consider the head openings. Some manufacturers insist that the shape of head apertures is more important than their size. Proper slope, contour and position, they say, permit guard openings to raise whiskers and funnel them to their doom. Among the listed models, Remington and Schick feature slotted openings; Bulova, Ronson and Sunbeam have essentially round holes; Norelco uses slots in a radial pattern.

How do you select yours? The first step is to consider the kind of shave

	W	MAINTENANCE			
Cotter Hardness (Rockwe) C Scale	Type al Motor	Operating Voltage	On Off Switch	Service nterva's mir's recommen dat onl	Repraced ment Cost of Cutter & Head
60	commutator	115 AC-DC	na	2 yes.	п.а.
66.5	commutator	115 AC-DG	no	142-2 yrs.	\$5.00 (both heads)
66.5	commutator	3 DC (battery pack) and 6-12 DC (car plug)	no	11/2-2 yrs.	\$5 00 (both heads)
63-65	Impulse	115 AC-DC	i ijo	6 mos.	\$4.50 (each head)
63-65	Impulse	6 DCF and 115 AC-DC	0.0	6 mos.	\$4.50 (each head)
60	synchronous	115 AC	yes	1 yr	\$3.25
56-58	synchronous	115 AC	ma	, 6 mos.	\$2.50
56-58	tmpulse	115 AC-DC	yes !	6 mos.	\$2.50 reach thead
17.00	commutator	115 AC-DC	l no	indef.	\$3 95

PAiso available for use on 12-voil car battery and 135 AC-OC.

How to use a shaver

BEFORE you plug in a new shaver, read the instructions. Even if you've owned one, chances are your new model is not used the same way. For example: Some ahavers won't do well under pressure. Bearing down on one of these increases irritation without giving you as good a shave.

Second, wash your face and dry it well before shaving. Whiskers hold some of the water and swell up, becoming easier to cut. Washing also removes cutter-dulling grit. Drying is important so surface moisture won't cause shaver drag. When you can't wash, try a preshave lotion. Don't use talcum. It may dull and clog cutters.

Finally, to attack whiskers that grow one way on your cheek, another under your chin, vary the approach. The principle: Maneuver the shaving head into lifting (not flattening) the hairs, so your shaver's openings can trap them

SELF-CLEANER: With head lifted off, Ronson cleans itself under power. You can blow clippings out of some makes; others need a brush.

you're looking for and the degree of your skin sensitivity.

Then check on some factors that may affect the life of your shaver, its maintenance cost, and its convenience in use. Cutters with higher Rockwell hardness ratings, for example, may reasonably be expected to hold their edges longer. This might be important if your beard is exceptionally tough.

Accidents—such as dropping a shaver -can't be figured on, but neither can they be ruled out. So the cost of replacing vulnerable parts is something to ponder.

And of course a shaver's power requirements should match the ways you plan to

NEXT MONTH: Thinking of buying a portable electric saw? An article in January PS will give you all the facts. Complete with spec chart, of course.

use it. The chart shows two dual-voltage models that can be used in your car. The Norelco Sportsman will also operate on its own battery pack, and Remington's Auto-Home doubles as a regular housecurrent shaver. With two exceptions, all the 115-volt models may be plugged into DC as well as AC outlets. In some areas this may be a convenience, especially for men who travel. But the synchronous, AC-only motors have the virtue of causing no radio or television interference: AC-DC motors may.

Another convenience angle: Most shavers can be turned off only by disconnecting the line cord, but a few models have an on-off switch.

About price: In most parts of the country you can buy an electric shaver for considerably less than its list price. either on a straight discount or on some kind of trade-in deal. But whatever the tag, look for a store that will let you try the shaver. Free home trials are the best way to tell if a shaver suits you.

Because of different shaving techniques -and the need to "retrain" your beardyour first efforts may leave your face pretty raw. So allow the model you select at least a week to prove itself.

Then let your face give the verdict. Unless you have some special problem, at least one of the new electrics should give you a neat and bloodless shave—with a happy balance of speed and comfort. END Want to make music? Experts say you're a rare bird indeed if you can't learn. As a starter, here are the facts:

Before You Buy a Musical Instrument

By Wesley S. Griswold

HE U. S. is in the midst of the biggest play-it-yourself boom in musical history. Around 28,000,000 people in this country now play some instrument—nearly twice as many as 20 years ago.

Why are so many people making music?

Students of the melodic boom say it's a product of the tense, fast-paced times.

There's a common longing, they say, for a good way to "let down." Nearly everyone has both more leisure and a need for a relaxing way to spend it. Physicians have long prescribed music-making to soothe nerves and lighten spirits.

Can everyone play? Hardly anybody is



so tone-deaf, uncoordinated and nonrhythmic, music educators believe, that he can't learn to play some kind of instrument. And once he starts playing, he must coordinate eyes, ears, fingers and sometimes breathing or feet. As a reward for his efforts, he gains the real thrill of being able to produce tunes.

This he achieves just playing by himself. If he joins a group of other amateurs, he soon finds that half the fun lies in fumbling along and correcting mistakes in tolerant company. In such a welter of concentration and good humor, who has room in his mind for worries?

Scarcely anybody but the dedicated musician bothers with tedious scales and similar exercises any more. The modern teaching trend is to start a beginner right in on tunes.

Often, the instrument you buy or rent comes with a book of simplified instructions so that you can pick out old favorites without a teacher's help.

If you crave a surer grasp of the instrument, there is now a way to gain it that makes a social game of what otherwise might become a lonely chore. You can learn by joining a group of amateurs, all equally new to the game, who are being coached by one teacher, a roomful at a time. It's a great way to rid yourself of self-consciousness.


The standard course for such a classincreasingly common in school adulteducation programs—provides 12 hours of instruction. At the end of that time, each player is usually advised to continue with private lessons. The cost of private lessons these days runs from about \$2 an hour in small towns to \$5-\$10 an hour in cities.

The zest of so many eager but musically innocent people to join in the new national pastime has created a special flurry in the easy-to-play instrument market.



ONE great favorite is the recorder, a small, tubular, wooden wind instrument with a flutelike tone. It's about as

simple to play as a shepherd's pipe and nearly as ancient. Recorders come in five "voices": soprano, alto, tenor, bass and sopranino, which has a higher range than the soprano. You play a recorder by placing fingers over holes in the instrument and blowing. (The bigger ones have a single key near the outer end.) You can easily learn to play one from an instruction book, and enjoy it alone or as part of a group. Recorders will set you back from \$4 to \$150.

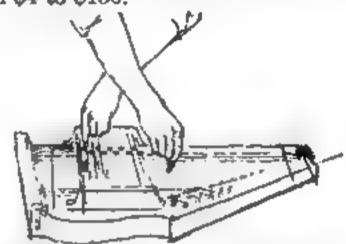

NOTHER very popular, easy-to-play instrument is the Autoharp. It is small, light, looks like a zither, and is held in one's lap and strummed. It has steel strings and a number of wooden "chord" bars. Each bar wears a little label with the name of a chord on it (C-sharp, E-flat, etc.). On the bottom of each bar are felt dampers with spaces between them. When you press down on the C-sharp bar, for instance, and strum the strings of the Autoharp with your free hand, the dampers under the bar prevent all strings from sounding except those that play notes in a C-sharp chord. The Autoharp ranges in price from \$20 to \$45.



Then there's the chord organ, a fastrising newcomer. It looks pretty much like other electronic organs but is winning friends at a brisk rate by being a cinch to learn to play. It has half a keyboard, for the right hand. In place of the part of a standard keyboard normally devoted to bass notes, it has a row of buttons. Each button, when punched,

What instruments are Americans playing?

Some 20,000,000 Americans thump pianos, 4,000,000 strum guitars and 3,000,000 play violins and related string instruments (violas, cellos, bass viols), according to the American Music Conference of Chicago.

More than 2,000,000 blow woodwinds (flutes, clarinets, piccolos, saxophones, oboes, bassoons). Nearly as many sound the more stirring brasses (trumpets, cornets, trombones, baritone and alto horns,

mellophones, Sousaphones, French horns, tubas). Another close rivalry in numbers exists between those who plunk ukuleles (1,600,000) and those who squeeze accordions (1,500,000). Organists (875,000) are growing rapidly, numerically speaking, thanks to new electric and electronic home organs. Even the humble harmonica, which ranges from bite-size to a whopping three-footer, has 400,000 fans, including President Eisenhower.

electronically produces a particular chord, which ordinarily would be the work of several fingers of your left hand. By following a kind of blueprint that comes with the organ, you can quickly find out which buttons to punch to provide an agreeable, full-bodied accompaniment to whatever tune you are able to pick out with one finger on the instrument's pint-size keyboard. Chord organs cost from \$985 to around \$1,100.

That long-time delight of kids and cowboys, the harmonica (costing from 50 cents to \$100), must also be mentioned among the instruments that are easiest to learn to play. Next in order of difficulty for most people come ukulele, guitar, banjo, accordion, piano, standard home organ, woodwinds, brasses and finally string instruments.

IF YOU hanker to join the crowd of Americans now making their own music, here are some practical points to consider:

Though most musical instruments cost a respectable amount of money, and some are very expensive, all can be bought on time-payment plans. Furthermore, music stores generally are willing to rent any instruments they sell, giving the renter an option to buy at the end of three months and use his rentals up to that time as a down payment on the purchase price The monthly rental is customarily from five to 10 percent of the cost of the instrument, if new; five percent, if used. Regardless of the purchase price, though, \$5 a month is about the rock bottom rental and \$50 a month—for the best grand piano—about the top.

If you want to learn to play an instrument, you might be wise to rent it until convinced that your choice was sound and your chance of playing well is bright.

Used instruments are often available, but here, as with second-hand cars, it's prudent to stick to reliable dealers, or to buy from the original owner, if you know

he has taken good care of it.

In shopping for musical instruments, keep in mind that an inexpensive one usually does not limit your choice of music, just because it's cheap. You can play anything on a \$100 violin that you could play on one costing \$100,000. There are a few cases, though, in which you might be lured by a low price into buying an instrument on which it is impossible to play all the music you may be capable of producing.

How about a lone-wolf instrument? Unless you start out with a well-developed yen to play a trumpet or a bongo drum or a harp more than anything else, you had better first consider the class of "self-sufficient" instruments. These need no accompaniment to give listeners pleasure, and, in addition, provide agreeable accompaniment for other instruments and for singers. They include the Autoharp and chord organ, already discussed, and also the:



PIANO (\$500-\$7,500) —most popular of all musical instruments, and the only one, except for the standard home organ (\$695-\$4,000), that is also an attractive piece of furniture. To play either,

you have to learn fingering for both hands. The piano is easier to master than the full organ, which has foot pedals (for deep base notes) and knobs, levers, flip switches or extra keys to change tone quality. Small pianos available at a minimum price have only 64 keys, 24 fewer than the standard size. You can't play all pieces on them.



ACCORDION (\$40-\$1,500)—This is nearly as versatile as the piano and, moreover, is portable. It has a piano-like keyboard for one hand, an array of buttons for the other, to play bass chords. Coordinating bellows action with the fingering of keys and bass buttons is tricky at first, but, seasoned players say, it gradually becomes second nature.

You can't cover as much musical ground with a 12-, 25- or 80-bass accordion (the numbers indicate the number of bass chords you can play on it) as you can with the 120-bass professional type. The price difference? Accordions with curtailed bass start at \$40, 120-bass accordions begin at \$300.



FRETTED instruments—These include the ukulele (\$1.39-\$75), cheapest and easiest to play of the group; mandolin (\$20-\$200); banjo (\$45-\$300); and guitar (\$20-\$500). To play any of these, you learn fingering for one hand (normally the left), while picking or strumming the strings with the other. Frets, raised strips of metal across the finger board, make it easier to learn where to place your fingers.



HARP (\$1,500-\$5,000)—Here's the only other self-sufficient instrument. It is difficult to learn to play, rough on the fingers, and few people have the money or inclination to tackle it.

All other instruments—woodwinds, brasses, strings and drums—need accompaniment. If you want to play one of them, you had better find an orchestra, band, ensemble, or, at least, a pianist.

1700DWINDS-For the most part, these have reed mouthpieces, though two of them-the (\$100-\$1,800) flute piccolo and the (same price range) —are played by blowing gently across lip hole. All woodwinds require fingering with both The saxohands. phone **(\$200-\$650)** is the easiest to play. Next come clarinet (\$75-\$600). flute. piccolo, oboe (\$150-\$650) and bassoon (\$150**-\$**650).





BRASSES—These require fingering of only one hand. The trumpet and cornet (both \$75-\$250) are almost identical, and are the easiest to play. Then, with the going progressively tougher, come the trombone (\$75-\$250); alto horn

(\$150-\$300); meliophone (\$100-\$350); French horn (\$100-\$375); baritone horn (\$160-\$350); tuba (\$400-\$900) and Sousaphone (\$515-\$740).



CTRINGS—These instruments, though the exceptional charm of their music is a reward for the effort, are the most difficult of all. If anyone has ever told you that you were singing off-key, don't take up the violin, viola, cello or bass viol. For them, you must have a sure sense of pitch. Though the strings require you to learn fingering for only one hand, you must learn to place your fingers with great accuracy and with no frets to guide you, in order to produce a note that is true. At the same time, your other hand must master the bow. If you move it across the strings diagonally, you'll sound a false note. If you don't exert just the right amount of pressure, you'll produce an unpleasant sound.

Violins, which come in a number of substandard sizes to accommodate small hands, start at \$25, violas at \$40, cellos at \$60 and bass viols at \$200.




DRUMS—These are for the man who was born with a sure sense of rhythm. If you are stricken with the calypso fever, get yourself a bongo (\$7-\$100) or a conga (\$18-\$100) drum, both of which are sounded with bare hands. If your enthusiasm is more conventional, you will prefer a snare drum (starting at \$40), played with sticks, or possibly a full set of drums (\$400), including cymbals and bass, to give your feet a share in the fun.

Many a music educator believes that nobody should attempt to learn to play a musical instrument before the age of seven. There is scarcely any top limit, though. A Chicago manufacturer took up the violin at 65, when he retired. Now, in his seventies, he plays in a suburban string quartet. With oldsters? Not exactly. Two of the four are teen-agers. END

NEXT MONTH: The story of the most sensitive instrument of them all—the human ear, Rend "The Wonderful Way We Hear" in January Popular Science.

Physical traits may determine how well you can play



small Hands? Better avoid the guitar. It requires long fingers and a wide reach. However, you might consider buying the three-quarter size.

short arms? One instrument not recommended in that case is the trombone. To play this well, you need all the reach that nature endowed you with.





IRREGULAR TEETH, a sharp jaw, thin lips? These are all points in your favor in case you'd like to play any of the woodwinds, experts have found



round jaw, full lips? These features are in your favor if you want to play a brass matrument, with its wide, round mouthpiece.

DECEMBER 1937 4



for your home An indoor barbecue that's gas-fired from small, disposable propane tanks makes

it easy to broil sizzling steaks all winter long. You just perch it in any fireplace, as shown above. In summer, you can also use the portable grill outdoors. The tiny tanks—the same kind used in many gas-fired blowtorches, lanterns and camp stoves— fire up instantly, eliminating the fire-building chore. Each tank lasts about two hours, then you remove the empty and hook on a new one. The burner heats the underside of a porous ceramic block at the bottom of the grill so that no flame reaches the meat directly. How do you get the fine outdoor flavor? It's the fat and juices dripping into the fire, says the maker, that smoke the meat. The grills, made by Bernz-O-Matic, come in two sizes: 12" wide with one burner for \$30; 18" wide with two burners for \$50.

New filters are made to stop dirt and scale from getting into hose-fed washing machines, pumps, lawn sprinklers and sprayers. The Trump filters fit standard garden-hose couplings in place of the regular washers . . . Latest aid in refrigerators is a full-length slide-out rack (at left) that lets you easily reach the stuff that's stored way in back. It's available in the new Sears line.

Here's a switch from cold to hot: two new thermostats are designed to simplify your furnace controls. One has up to five pushbuttons for easy touch-selection of heating, cooling, air circulation and manual or automatic operation. Made by White-Rodgers, it also has an interlock arrangement that makes it impossible to turn on a furnace and air-conditioning system at the same time—which can happen where separate thermostats are used. For those



AT POPULAR SCIENCE

who want a clock thermostat, there's a new Minneapolis-Honeywell model with an automatic time switch that turns down the heat for any interval during the day as well as at night to save fuel. You can set it to go off when you leave, come back on before you get home . . . Speaking of heat, you can now put a furnace in your window just as you would an air conditioner. The new Fedders unit at right is actually a compact heat pump that supplies both heat in winter -by working like a refrigerator in reverse-and cool air in summer. A single thermostat turns on either one as you need it. Each unit costs only about \$50 more than an ordinary air conditioner alone, its makers say and you get a furnace to boot. The electrically operated units can be used singly for supplementary heat or, with one in each room, to take care of the whole house.

Other heat pumps, including a central GE system small enough to fit in a closet, may indicate a new trend in the making. Are heat pumps

economical for you? They are, say experts, if your electrical rate isn't too high. For those who prefer gas as a fuel, there's also a year-round gas-fired conditioner. The Perfection-Hupp model is not a heat pump, but provides a similar kind of winter heating and summer cooling in a single compact unit.



for the home handyman

Speedier cleanup after painting, always the worst part of the job, is claimed for a new Mira-Spin tool. You just hook on a solvent-soaked brush or roller, pump the revolving handle a few times, and it's said to clean out paint by a fast spinning action . . . Watch your lumberward for new interlocking concrete blocks (below)


that automatically give you straight, level walls. You just stack them in place dry, then add mortar in the joints later. Air spaces between the blocks provide insulation, keep out moisture, even let you run plumbing and electrical lines right inside. The two halves of each block are held together by steel cross bars embedded in the concrete Where extra strength is needed, tie bars can be run through the walls. The Presto Brick Machine Corp designed the new blocks . . . W ant to display your favorite guns quickly and safely? A new type of individual hook-shaped bracket can be screwed anywhere to the wall, one at each end of the gun, saving a lot of gun-rack carpentry. The rubber-covered Gunberth brackets come in two sizes, will hold both hand and long guns.

If you are worried about ceiling tiles covering up important plumbing and electrical fixtures, here's an answer. You can install a hinged, metal access door (bottom right), then fit a matching tile into the recessed face of the door. The Milcor doors come 12" by 12", 12" by 24", and 24" by 24", and will take all types of tiles.

[More new products on the next page]



what's new for your car

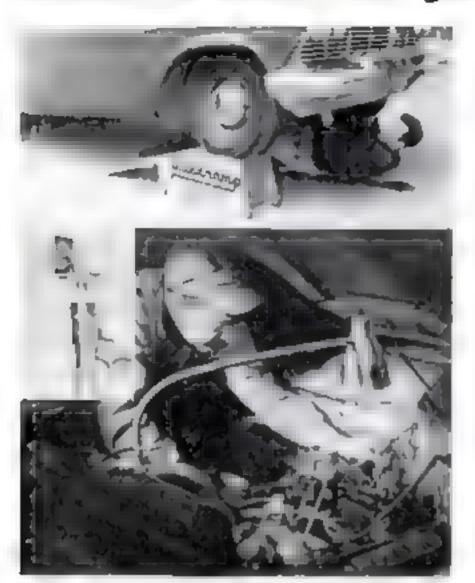

Drive onto these twin ramps (top left) and you can work safely under a car without danger of slipping jacks. The steel Adelramps have nonslip rubber feet and wheel pockets to prevent roll-off. Yes, you can back up on them, too . . . Good working light, another important aid to car care, is the aim of a new Moffatt swivel lamp. You can buy it already mounted on a radiator cap for underhood work, as at left, or with snap-in connectors (inset) for use on power tools, workbenches, walls or desks . . . The wrong kind of light can be kept out of your eyes with a new anti-glare dashboard coating made by Arndt-Palmer, It's a clear vinyl finish, doesn't hide the color . . . If you've been worried by recent warnings about high-speed tire distortion (PS, Oct., p. 84), the BF. Goodrich people have an answer: a new all-nyloncord tubeless tire that's said to eliminate wobble even at 110 m.p.h.

for your leisure hours

Bigger baby outboards may be a trend to watch for, as indicated by a husky new Wizard fishing motor for '58. Power is up to 5½ hp. over last year's five, displacement up from seven cu. in. to nearly 9½. Yet weight (55 lb.) is still under many engines of this size. The motor will troll down to one m.p.h., hit up to 15 m.p.h., and has a reverse gearshift... Two new camera items are in the moderate-price department. One is an imported Japanese single-lens reflex camera that offers three interchangeable lenses for a total cost of about \$278. The Kalimar uses 120 film, has automatic shutter cocking and is synchronized for both strobe and flash. Camera with standard 80-mm, f/3.5 lens is \$99.50, A 150-mm, f/4 telephoto costs \$79.50; a 52-mm, f 3 5 wide-angle, \$99.50.

To light your pictures indoors or out, there's also a portable electronic flash that works on either flashlight batteries or house current for about \$60. The new Graflex unit has 1/1,100 second duration and gives up to 100 flashes before batteries need replacement . . . You can have a back-yard skating rink any time the weather is below freezing with the circular plastic liner shown

waterming pour console, wires;
wavesradio vo

at left. You just fill it with 2" to 3" of water—like a very shallow plastic swimming pool— and let it freeze. Made by Urb Products, the liners come in four diameters from 15' to 35' for \$20 to \$75...

You can change records without getting up from your chair on a new Admiral console. The remote control—with no wires; it works by sending ultrasonic waves— also tunes the TV set and adjusts radio volume from anywhere in the room.

for the home shop

Multi-purpose tools are the trend today. One of the neatest is a universal socket wrench that saves you carrying a full set of separate sockets or fussing with several sizes to find the right fit. Its jaws adjust like a chuck to grip all sizes and shapes of nuts from \(^3/8''\) to \(^3/4''\). Made by the Alliance Tool Co., the socket itself, without handle, sells for \$5.95\). Another all-in-one tool is a three-way screwdriver that gives you a choice of a wide or narrow straight blade or a Phillips blade. The blades swing out from the handle, which also provides a forward or reverse ratchet action. It's called the Versatool. . . .

A convertible chainsaw-handsaw (below) offers a novel switch. You remove the circular blade and insert a sprocket wheel that drives a 12"-long chain attachment. It will cut timbers up to 9"


thick and has a blade speed of 2,500 feet per minute. Made by Portable Electric, the tool has a kickproof slip clutch and sells for \$79 complete . . . Another new portable circular saw doesn't convert to anything, but does offer a lot of cutting at a modest price: \$59.50. Made by Porter-Cable, it has a kickproof clutch, ballbearing drive and is said to make all professional cuts including compound miters in stock up to 2" thick . . . An electric drill that also saws and sands, at lower right, uses a new method of converting. Instead of fitting attachments into the chuck, like other accessories, you actually build a whole new tool to do each job. To saw, you remove the chuck and install an offset drive that powers a reciprocating saber blade. To sand, fit on a wobble wheel that drives an oscillating sanding shoe. The Thor kit comes with all the parts packed in a steel case for \$37.50.



Here's where to write if you can't get any stem listed above. Adelenmy Co., 3º12 8 (his ago dee., Cho ago 31, Admiral Lorp., Cho ago Allanev Tonl. 287 & oth 51, St Paul I. Man., Arndt-Palmer Laba, Helrindate Uich, Berng-O-Matle, Octo Berns Co., Rochester, A. F. B. F. Goodrich. Akron, Uhm, Fedders-Quigan Corp., Maspeth, A. F., General Electric, Bloomfield A. J., Graffen, Rochester & A. F.; Gunberth, Inc., Inc., 1909 S. Kingshighway Ried, St. Lower 10, Mileon, Inland Steel,

for more information:

Nilmanker I., Minneapolls-Honeywell. Manneapolis 8. Mica-Spin, Kruger Product. Lenkell P. O. Ros. 5582 Retroit 38. Moffett Products, 1824 Triton Br. Minneapolis 22. Perfection Industries. 7609 Plate, Circumal Portable Electric Tools, Chicago 30 Porter-Cuble, Stracuse 8. N. 1. Presto Brick Machine Co., 350 oth 4cc., N. 1. C., Sents. Roebtick, Chicago, Thor Power Tool Co., Chicago I. Trump, Asimal Trop Co., Little Po., Leb Products, 55 Meadow St., Brooklyn 6. N. 1. Versatool, Engle Products Meriden Conn.; White-Rodgers Co., 1209 Cass. 4cc., St. Louis 6; Wigned, Festern Auto Supply Kansas City 8.

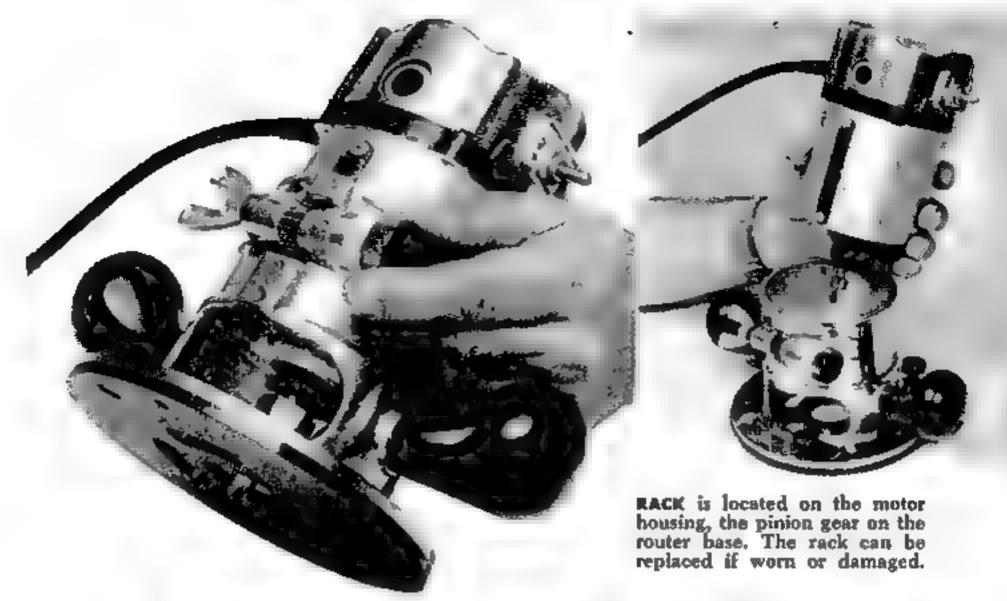

New Router Adjusts

EPTH adjustment of a new Black & Decker router is provided by rack-and-pinion. You turn a knob to raise or lower the power unit. A pinion gear on the base meshes with a rack screwed to the motor housing.

Because the housing moves straight up and down instead of being rotated, the switch is always in the same position relative to the handles. You don't have to search for it for instant shut-off.

To set the working depth, you first


bring the router bit—locked in the chuck—lightly down on the work surface. You then set the dial—it slips around the shaft of the depth-adjustment knob—to this zero cutting depth. After "zeroing in" the scale, you turn the knob to lower the bit to the desired depth, indicated in 64ths of an inch on the dial. A large wing nut locks the setting.

The router is powered by a heavy-duty \(^3\)4-hp, motor operating at 19,000 r.p.m. You get the router, a smooth plastic sub-

Sheet Steel Backs Up New "Sandpaper"

AN ABRASIVE that is said to outlast andpaper 100 to 1 is being produced by brazing tungsten-carbide grits on sheet steel. The tough grits, permanently fixed on their steel base, stay sharp indefinitely and can be cleaned of gum or

The Skil Corp., 5033 Elston Ave., Chicago, makes the new abrasive in six forms for home-shop use, all shown on the facing page. They are a two-sided sanding disk for table saws priced at \$12.95 (you can use the edge for cutting); a sanding block at \$3.45 for fine and coarse hand sanding; a 14" file at \$2.25 with fine and coarse sides for shaping wood by hand; and grit shoes, at \$2.95 each, in a wide range of grit sizes for orbital sanders. Grit sleeves and rods are also made for industrial spindle-sanding machines.

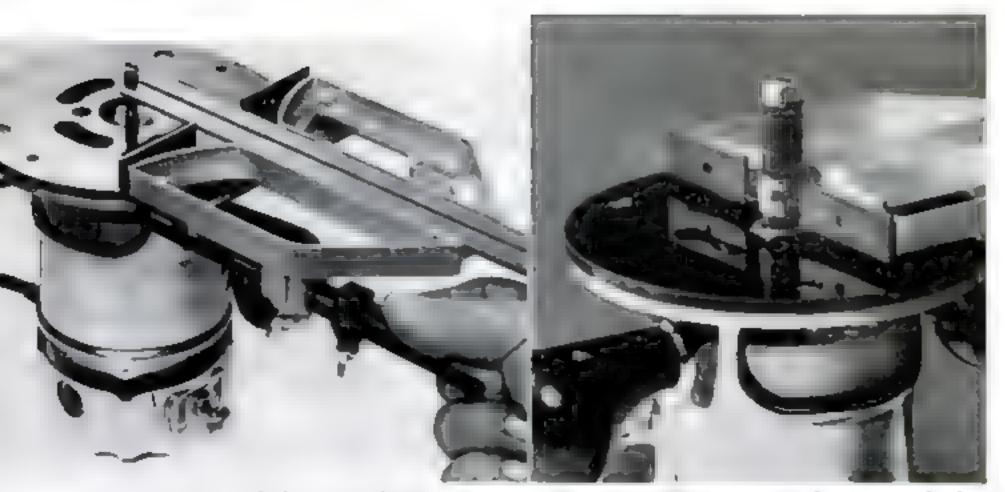

METAL RULE, or scale from a combination square, fits in 1" groove in underside of router's edge guide for accurate measurement of the distance to cutting edge of a bit or cutter.

SHAPER CUTTERS are mounted on a special arbor that locks in the chuck. They can be used singly or in a large number of combinations to produce a variety of edge cuts and moldings.

by Rack-and-Pinion

base, chuck and two wrenches for \$59 50. The motor housing has a flat top with air-intake slots arranged so that the router can be stood on its head for sharpening bits and cutters. High starting torque makes it necessary to hold the tool firmly when starting. At operating speed, it stands quietly on its flat top while you


Router attachments include a straight and circular guide (\$6.50) for routing or grooving parallel to the edge of straight or

use the bit-and-cutter sharpener (\$17,50).

curved work; and a slot- and circle-cutting attachment (\$6.75) that equips the router for cutting evenly apaced grooves, circular holes and concentric designs.

A dovetail kit consisting of a workclamping fixture, finger template, template guide and bit—everything needed to cut precision dovetails in two mating pieces at one time—can be had for \$39 50.

Builders and carpenters will find a hinge-mortising kit priced at \$55 a time saver for hanging doors and shutters.

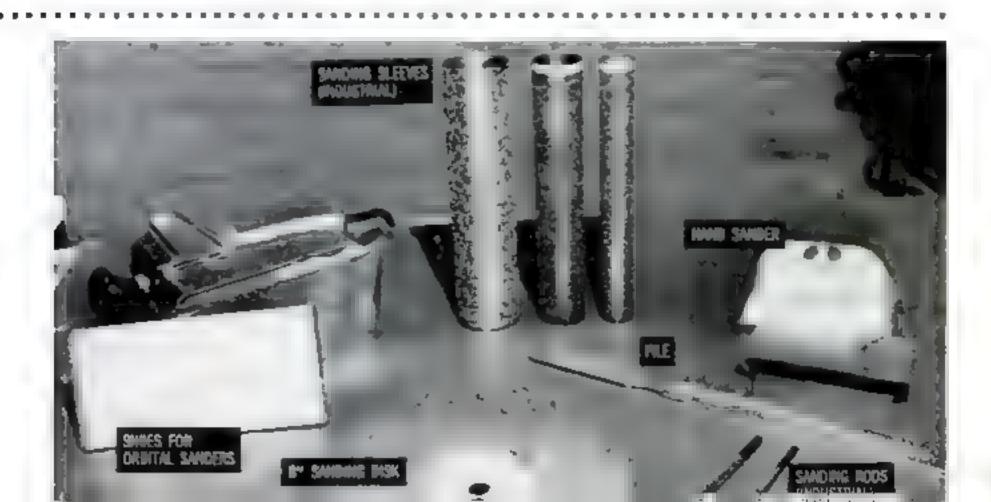



WO speeds—1,000 and 3,000 r p.m. g
—have been built into a new 3/8" n
electric drill. This gives it the ca-

You use the chuck in the high-speed spindle for drilling sheet metal and wood, and for such accessory jobs as disk sanding, rotary sawing, grinding, polishing.

When heavy jobs turn up, you remove the husky %"-capacity chuck and screw it in the spindle geared for low speed, converting the drill to heavy duty. The gear reduction provides the higher torque needed for drilling thick metal and masonry, and for boring large holes in wood. The slow speed is also better for such jobs as driving screws, mixing paint and rotary waxing with a wool bonnet. A dust cap snaps over the unused spindle to keep the threads clean.

The manufacturer, Wen Products, Inc., 5804 Northwest Highway, Chicago 31, says that the drill, priced at \$29.95, is the equivalent of two.

This New Mount Gives You a One-Motor Shop



TWO-PART MOTOR MOUNT now on the market consists of a pulley base and a motor base (you supply the motor). Centrifugal clutch coupling on the motor shaft slips into clutch drum on the pulley base. Bases fit all power tools.

A NEW snap-on mount makes it easy to operate all shop tools with one motor. The change-over from one tool to another takes only seconds and there is none of the inconvenience that often cancels out the advantages of a single-motor workshop.

The motor mount is made in two parts: a motor base (you buy one at \$7.98) and a pulley base (one for each tool at \$9.87 from Graybill Industries, Inc., 2907 North Monroe, Spokane, Wash.). A pulley base with the correct-size pulley is installed in the regular motor-mounting position on each tool and connected with the V belt. The motor is bolted to the motor base and the "plug-in" coupling is mounted on its shaft. To shift the motor from one tool to another, you simply slide it off one pulley base and onto another.


A spring latch automatically locks it in position and centers the clutch coupling in the drum. When the motor switch is turned on, weighted rubber segments in the coupling expand by centrifugal action to drive the clutch drum.

You save important money on shop motors by using the single latch-on motor. In a shop consisting of five power tools, the cost to drive them with one motor would be about \$35 for the motor, \$7.89 for one motor base and \$49.35 for five pulley bases, bringing the total to \$92.24. Individual motors to drive the five tools might cost up to \$175.


Each pulley base has its own shaft bearings, reducing wear on the motor bearings. The motor can be stored in a cabinet, when not in use, to keep children from turning on any of the machines.

HANDLE ON MOTOR BASE makes moving it from tool to tool a one-hand operation. Each tool in

the shop is equipped with a pulley base. The drive pulley and V belt remain undisturbed.

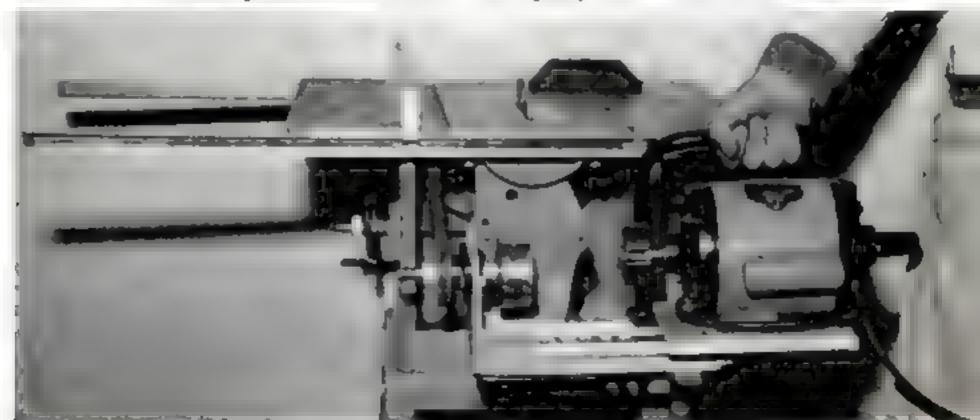

Bandsaw or Jigsaw? Which Should

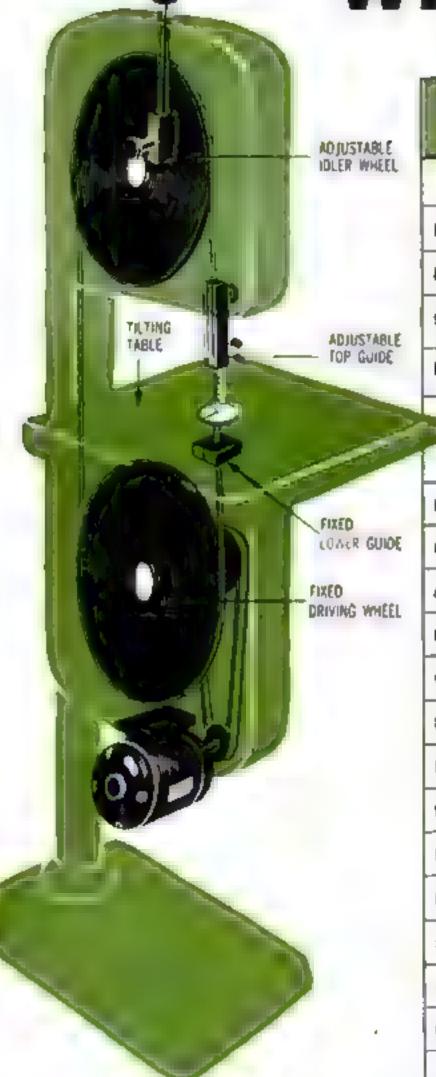

SANDSAW ANATOMY: Bandsaws may have either two or three flangeless wheels over which a continuous blade travels. One wheel is adjustable to maintain blade tension. Guides above and below the exposed section of the blade resist pressure from stock being cut.

How They Stack Up JIGSAW BANDSAW \$20-\$50 \$50-\$100 Price range (average) Power requirements 另一场 hp. 56 - 56 have Randusws generally Reed more space Space requirements Both need stand, motor, pulley and belt Extras required Max. douth of cut (average) 18" Max. width of cut (average) 12" Risping with guide? limited yes. Ilmited Crosscutting with guide? **708** Angle sawing with table tilt? **yee** Yes. limited Reserving? *** Compound sawing? Rimited yes. Pad sawing? *** **948** Intricate irregular sawing? 50 yes. Internal sawing? 746 Internal baval sawing? yes. inlay work? 749 limited " Sanding? **705** Filling? Yes Matal saving? 795 yes. Plastics sawing? Manisted yes Sawing in stock with yes" 100

*Only one make offers a sanding attachment

man face grant

On passws equipped with removable upper arms



You Buy? By R. J. De Cristoforo

Versatile as both these power tools are, one may serve you better than the other. Here's how they compare

Solution of the most useful tools in your shop. But there are times when you have irregular cutting to do. A circular saw is no help there. What you need, if you want to avoid a lot of manual labor, is either a bandsaw or a jigsaw. Say you can't afford both. Which one should you put your money on?


Don't let this puzzler throw you.

First, recognize the fact that while bandsaws and jigsaws have many features in common, each will do certain types of work either better than, or beyond the ability of, the other. Evaluate these advantages and limitations on the basis of your own particular needs (the check list on the facing page will help).

As versatile and enticing as both of these power tools are, you should have little trouble selecting the one that's better for

you.

For specific examples of jigsaw and bandsaw pros and cons, see the pictures on the next four pages.

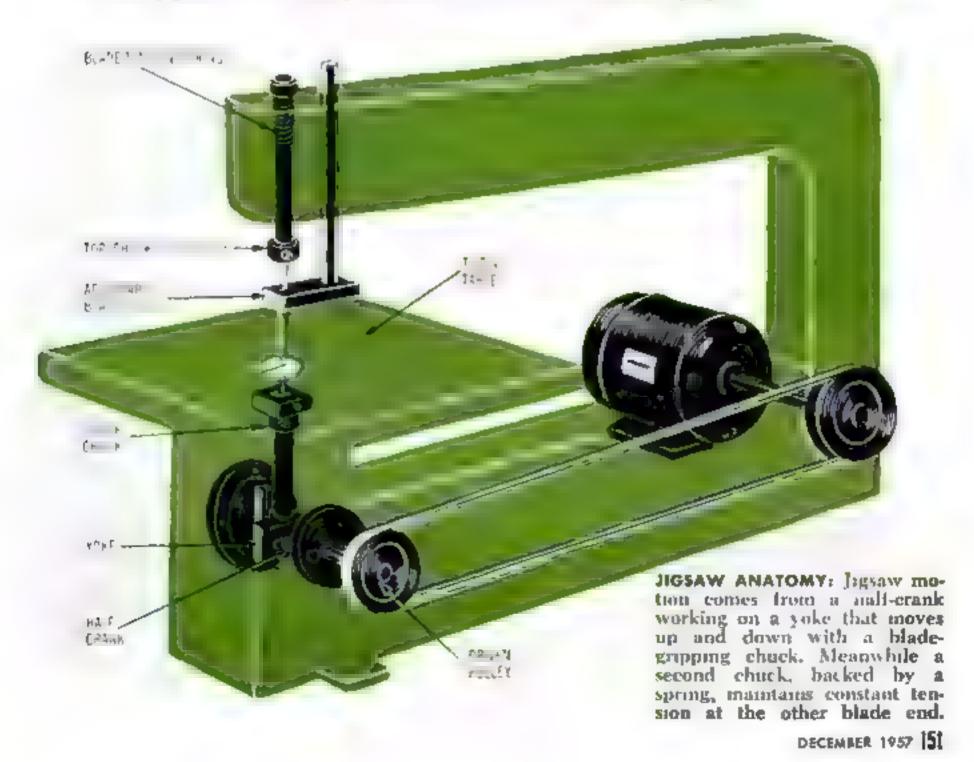



Most passess have removable upper arms, chimpating throat clearance problems. A heavy saper blade makes top chincking unnecessary. Care must be taken, of course, to prevent the


unsupported blade end from flexing. But once you get the feel of the stock, and of the blade's response to the rate of feed, you can follow guide lines closely. If cuts do waver a bit, they can be trued with jigsaw sanding.




intricate metal cutting: Blades are available for cutting nonferrous and hard metals. Here again, you can do finer work with a jigsaw, and of course aren't limited to outside cuts.




SANDING: Gripping an abrasive sleeve, a jigsaw 5 half-round sanding-stick attachment can smooth both convex and concave edges. Only one make of bandsaw has a sanding attachment.

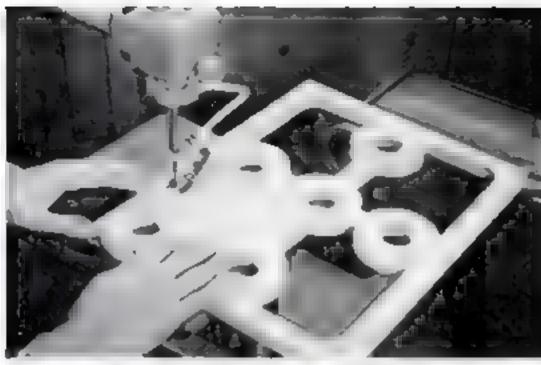

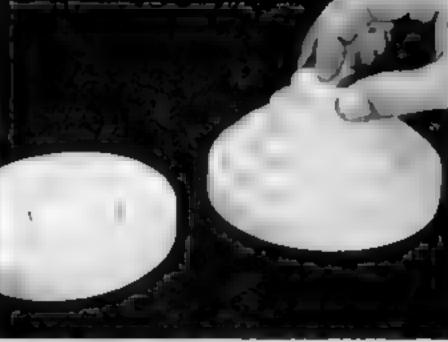


MAKING INTERIOR CUTS: Only a jigsaw can run off interior cuts like these. It's done by drilling a starting hole and slipping the stock over the retracted blade before its upper end is fastened in the top chuck. An old woodworking trick makes use of this feature. With the jigsaw table

tilted from one to 10 degrees, concentric rings are sawed in a disk. The bevels hold them together when the center section is raised as shown. Glued in this position, they form a thick blank for bowl-turning. Later, wood putty is used to fill in the starting holes.

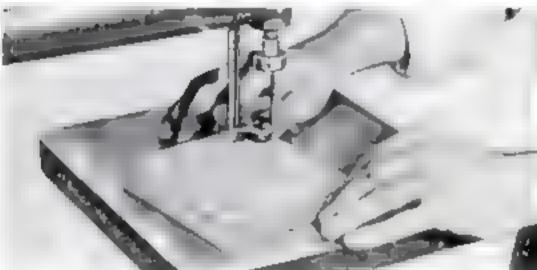


PRODUCING PRECISE, FINE WORK: Small jigsaw blades can turn on a smaller radius than a bandsow's, remove less stock, and minimize tooth tear on the undersurface of the work. At left above, multiple cutouts are made in a


stack of paper sheets sandwiched between two blocks. At right, another multiple operation is shown: Parts for five identical inlaid-wood pictures are cut from a like number of veneer sheets. The pieces are interchangeable.

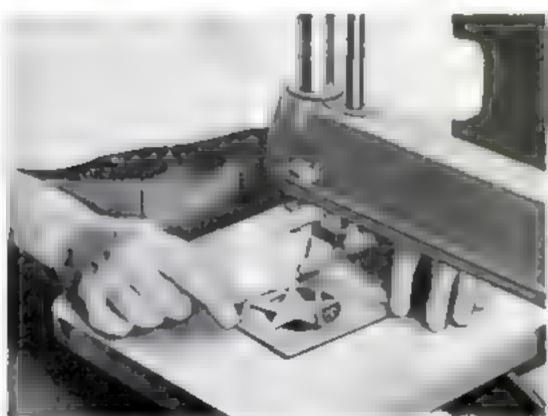

PILING: Here's another jigsaw specialty. Clamped in the lower chuck, square, triangular, round or half-round files do a fast job of shaping metal parts and smoothing burred edges.

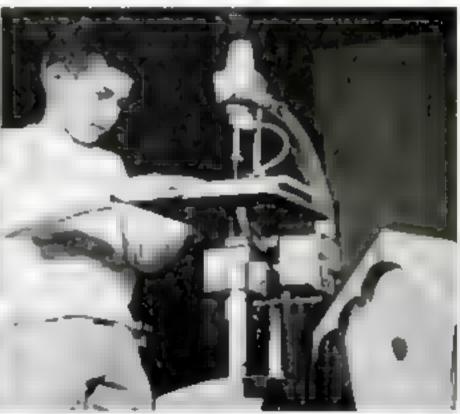


SUMMING IT UP: A jigsaw has less capacity but more versatility than a bandsaw. It's also much safer—a good tool to help you introduce anyone to woodworking. [Please turn the page]

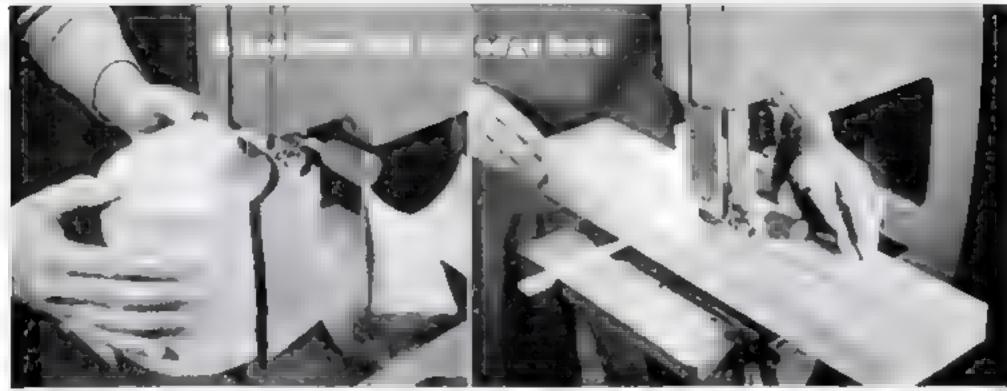

CUTTING THICK STOCK: The long, exposed section of a bandsaw blade whizzes through wood from three to four times as thick as you can cut with a jigsaw. Here, a hefty 6" block is preshaped for turning on a lathe.

MAKING STRAIGHT CUTS: With a rip fence, or a miter gauge set in one of its table slots, a bandsaw runs off straight cuts as accurately as, and faster than, a circular saw. Bandsaws are also easier to set up for taper cuts.

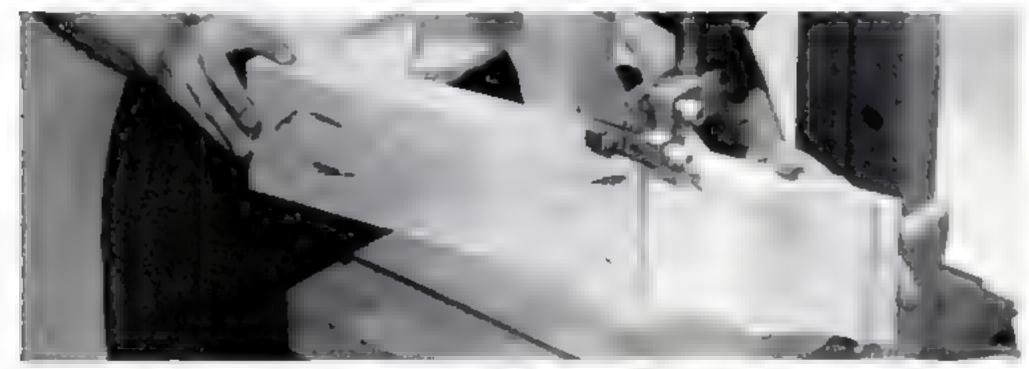


WEAVY COMPOUND SAWING: In this operation, waste from contour cuts through one plane of the stock is nailed back in place. Then, with

the stock turned 90 degrees, a second set of cuts is made. You can do compound sawing on a jigsaw, too, but only to form small parts.




MASS-PRODUCING PARTS: Because a bandsaw can make both straight and irregular cuts through thick stock, it offers the woodworker a choice of two methods for mass-producing parts.

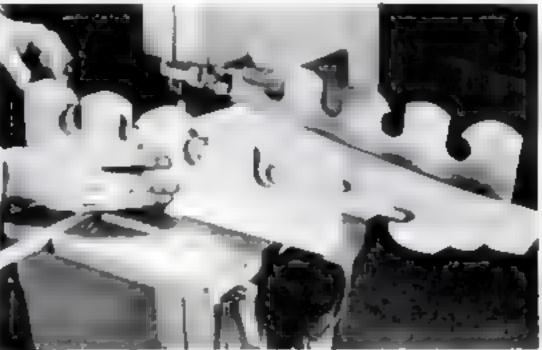

In pad sawing (above left), a number of blanks are temporarily nailed together and contour-sawed. In resawing (above right), a thick block is contour-sawed first, then sheed into parts.



SAWING PLASTICS: A bandsaw blade's one-directional motion throws chips away and develops little heat, while a jugaw blade returns chips to the kerf and often generates enough heat to "weld" them back in place.

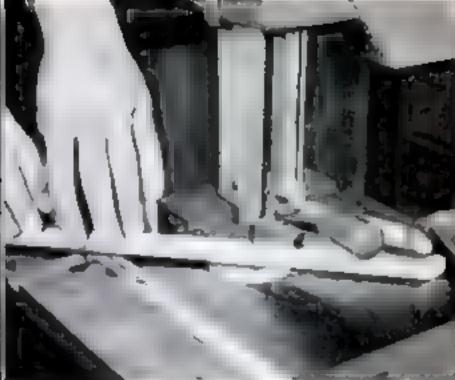



buy special blades that will saw both nonferrous metals and wood. Hard-metal cutting blades are also available, Used with a speed-reduction unit they'll handle almost any job.



SUMMING IT UP: A bandsaw is a high-capacity performer, at its best on the big jobs—turning out heavy cabinetwork, making lawn furniture, boatbuilding, etc. It is also made to order

for mass-producing large parts. Among professional woodworkers, bandsaw owners outnumber those having jigsaws. If you go in for ambitious projects it's the tool for you. END

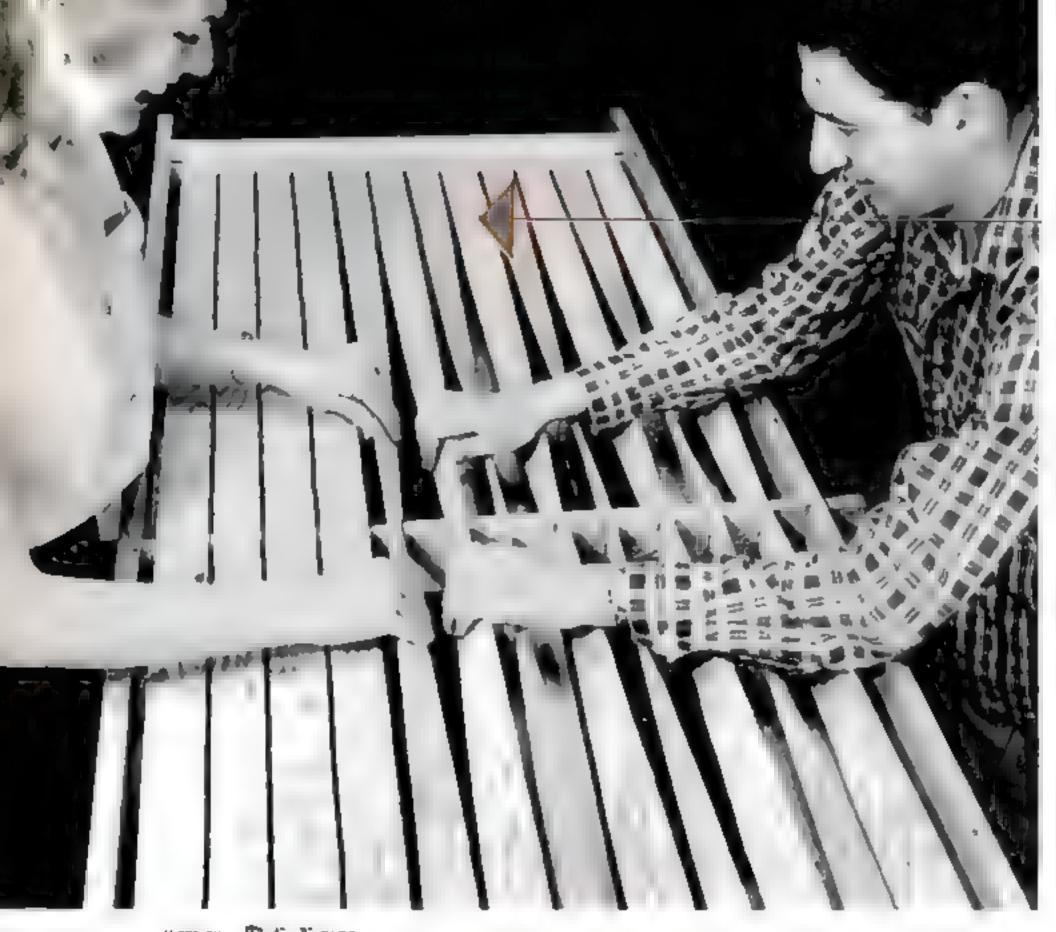

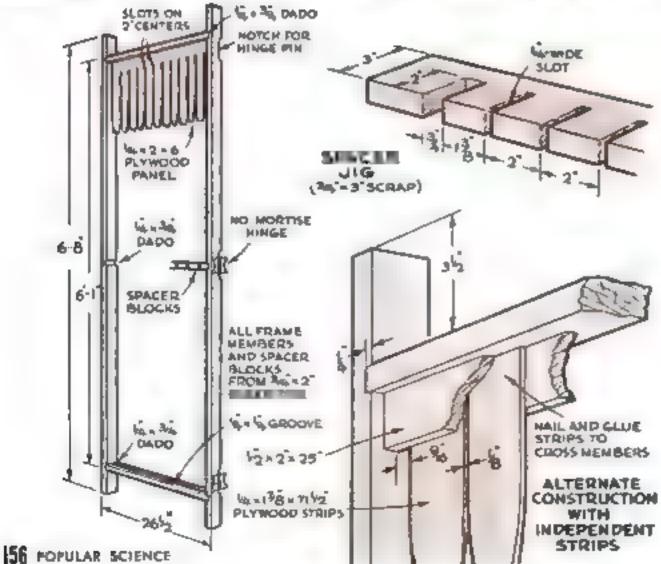

What to buy

You'll need three 2'by-6' sheets of \(^1/4''\)
plywood, three 20'
lengths of \(^3/4''\)-by-2''
(actual, not nominal
size) clear pine, and
six \(^3''\) no-mortise
hinges. Also, some 6penny finishing nails,
a can of plastic-resin
glue, and approximately two quarts of
enamel, lacquer or
clear varnish.

Twisting Plywood

for a Folding Screen

By Paul Corey

You can bend and twist strips of thin fir plywood into all kinds of shapes. The handsome, homemade screen that you see below takes advantage of this flexibility. The materials to build it cost about \$12. You can use it as a room divider or as a backdrop for modern furniture.

The job in brief

The screen consists of three panels of 1/4" plywood framed in 3/4"-by-2" wood. Each panel is cut lengthwise into strips 2" wide, the cuts terminating 2" from the panel ends. Each strip is then twisted 90 degrees at midpoint and glued in place with wood retaining blocks.

Tools you need


Slits were cut for this screen with a Porter Cable Routo-Jig, but you can use any power router with a 1/6" bit. Or use independent plywood strips sandwiched between framing members, and you can do the whole job with hand tools. (In this case, add two 14' lengths of 1/2"-by-2" pine, and some 2-penny nails to your shopping list.)

Either way, the hand tools needed are hammer, screwdriver, handsaw, chisel and two C clamps.



Now see the next page for the details of how it was built

Here it sets off a modern chair. More building details for the screen of twisted plywood

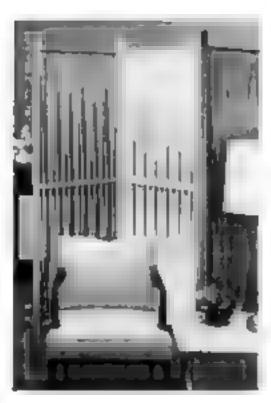


CTART by cutting the parts for the frames. Each 20' length of 3/4"-by-2" pine will give you two 6'8" uprights and two 25½" cross members, with enough material left over for 11 13/4"-long spacer blocks and two 13/4"-long end spacer blocks.

If you are using a power router, run a 1/4"-by-1/4" groove the length of each cross member along the center line of one of its broad faces. If this is a hand-tool job. cut 12 supplementary framing members. each 25" long, from two 14' lengths of 1/4"by-2" pine. With these, and independent plywood strips, no grooves are needed.

Next, cut three dadoes across one broad face of each upright. (Use a saw and chise) if you don't have a power router.) All dadoes are 3/4" wide and 1/4" deep. One is located at the exact center of each upright: the others are cut 3%" in from the top and bottom

Cutting the slits. If you use a power router to slice through the 2'-by-6' panel.

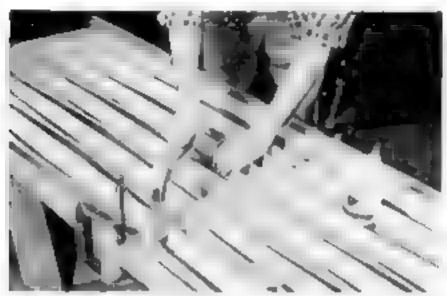

A SPACING JIG holds the twisted strips firmly in place while permanent retaining blocks are driven home. Eleven 1% "-long spacer blocks hold the strips at 2" centers, and two 1%"-long blocks go into dadoes at the ends.

apply a shoe or guide attachment and slide it along a straightedge clamped to the panel. Cut the slits at 2" centers, working to stop marks 2" in from each panel end.

If you're doing the work by hand, or with a power saw, cut 12 11/8"-wide-by-71½"-long plywood strips for each screen section and glue and nail their ends between the cross-frame members, as shown in the detail drawing. Drive the nails in from both sides of the assembly, countersinking them and filling the holes with wood putty.

Putting the sections together. To assemble screen sections built up from strips, simply apply glue and nail the uprights to the three-piece cross members, Or, if you're using router-slotted panels, insert their top and bottom edges in the grooves of the single cross members before applying the uprights.

While the glue is drying, make a spacing jig from a piece of 3/4" scrap lumber at least 3" wide and 30" long. Cut two 3/4"wide-by-2"-deep slots in this jig, 25" apart. Between these slots cut 12 more, each 1/4" wide by 2" deep. Space these as shown in the jig diagram.

Place the jig on edge under one of the screen sections, just above or below the center dadoes in the frame uprights. Insert the uprights in the 3/4" jig slots. Then, starting at one side, give the first panel strip a 90-degree twist, and slip it into the corresponding 1/4" jig slot. Continue across the panel, twisting the strips in alternate directions.

After all strips are in place, apply glue liberally to the ends of the spacing blocks that will hold the alignment permanently. Also apply glue to contacting strip areas. Drive the blocks home with a hammer. True them up and, after covering both sides of the resulting crossbar with masking tape, clamp the line of blocks together between two stout strips of wood. Then remove the spacing jig and repeat the operation with the other two panels.

Finishing. After the glue sets, sand the blocks flush with the strips, smooth all strip edges and round the corners at the ends of the upright framing members slightly. Cut notches for the pins of the nomortise hinges, and fasten the three screen sections together, hinging the outer sections in opposite directions for compact folding. Finally, apply two coats of paint. lacquer or clear varnish.

The POPULAR SCIENCE Shop Notebook

Check the accuracy of holes drilled 90 degrees to the work surface of production parts this way: Place two parts face to face on a piece of rod that fits snugly into or through the holes. If the holes are truly perpendicular no light will show when you sight between the parts while rotating one against the other.—Frank La Saracina, New York City.

A hold-down made from a square piece of 3/4" plywood screwed to a length of two-by-two will prevent saw-wrecking vibrations when cutting sheets of non-ferrous metals with a table saw. Clamp it to the fence with just enough clearance beneath for the metal to slip through. Adjust the fence for the cut; start the motor and raise the saw to make a slot in the plywood. With this setup, you can run off a clean, chatter-free cut.—Henry J. Gilbert, Tulsa, Okla.

To check the squareness of welded work, grind the outer corner off an old steel try square. With the corner removed, the square can be brought up to the metal surfaces without interference from the bead.

Cutting wire or thin rod to identical short lengths can be done accurately by using your vise and a strip of steel as a jig. Clamp the strip so it protrudes the required length from the side of the vise. Butt the end of the stock against the jaw (right), and clip off sections with cutting pliers held flat against the strip.—Federico Strasser, Santiago, Chile.


Corroded screws can be loosened in wood or metal by applying heat to their heads to expand the shanks. Use a well-heated soldering iron. If the tip is removable, reverse it so that the flat end instead of the point can be touched to the screwhead.

Cleaning concrete shop floors is easier if you tape a garden hose to a long-handled scrubbing brush. This will keep a steady stream of water in front of the brush as it is pushed across the floor to the drain.

A handy chuck-key retainer for a portable electric drill can be quickly made by cutting a ¾"-long slit near each end of a scrap of leather strap. Loop one end of the strap over the electric cord of the drill, and then draw it through the slit in the opposite end to a snug fit. Slip the key's bevel toothed end through the other slit. This way the key will still be free to turn in the leather retainer strap whenever you want to use it.—H. J. Gerber, Stillwater, Okla.





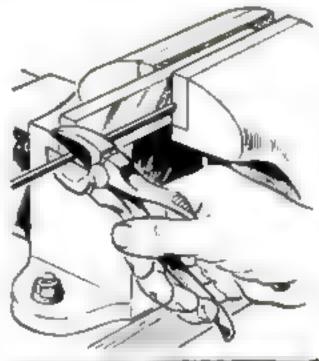





Wordless Workshop







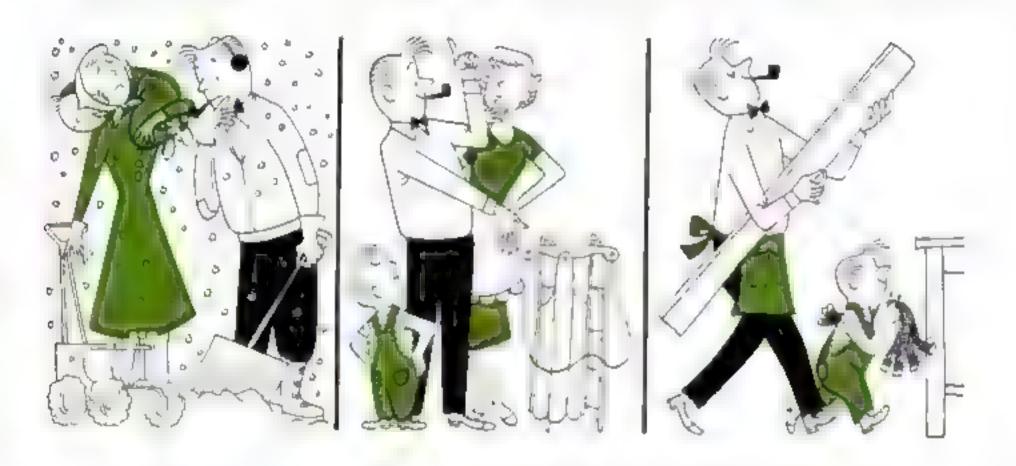


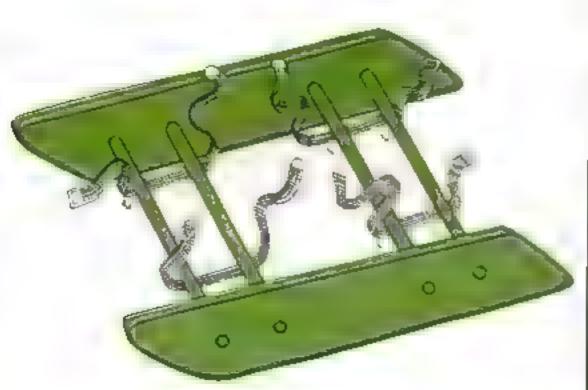







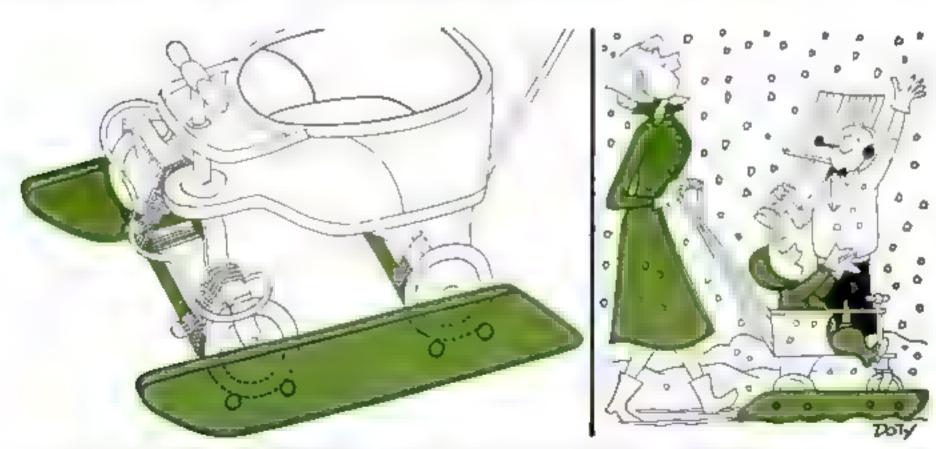

Next Month: Easy-to-reach bathroom mirrors for the whole family DECEMBER 1957 [6]

How to Quiet Noisy Plumbing

Do your pipes groan, rumble and bang every time they go into action? Here's how to hush them

By David X. Manners

TOU don't have to put up with the three biggest rackets in plumbingpipes that hammer, faucets that chatter, drains that gurgle. Silencers for all three usually are close at hand.

Water bammer: How to cushion it

You get water hammer when water slams to a stop in a pipe. The faster the water is traveling, and the more sudden the stop, the worse the crash. Let it continue, and hammer can literally shake your plumbing apart at the joints.

What causes water hammer? It may be a sagging pipe, a pipe bent out of line or a pipe with inadequate support—particularly at elbows or other turns.

Rigid copper tubing in 1/2" size should be supported every 6', and 3/4" and 1" tubing every 8'. Soft copper tubing should get even more support. But don't make hangers and clamps so tight that they prevent normal expansion and contrac-

tion of the pipe.

At corners, first determine the direction in which water flows. Then install a brace against the section of pipe that the water hits in making the turn. You can use a pipe hanger, a wood block or a shelf bracket as a brace—anything to keep the pipe from moving under the impact of the water.

An air chamber, a device for cushion-

ing the slamming water, is called for if snugging up the pipes is not enough to stop the racket.

The simplest type of anti-hammer cushion is a vertical capped length of pipe attached to the supply line just before the fixture. Air trapped in this dead-end pipe will compress under the impact of the moving water and absorb the blow.

Anti-hammer chambers can be as short as 12" to 18" and the same diameter as the supply pipe. But a chamber will be more effective, and remain effective longer, if it's at least 24"-and greater in diameter than the supply pipe. For 3/8" supply pipe use a 3/4" chamber pipe, for 1/2" use 1", for 3/4" use 11/4", and for 1" use 11/2". A reducer fitting will connect the two sizes. If it's not possible to install an air chamber at the fixtures, a 3' air pipe installed near the water meter may do the job almost as well.

Even a line already protected by an air chamber may become noisy. Draining the line will drain the chamber. A commercial silencer that won't get waterlogged costs about \$5.

Hissing, humming and other pipe noises are caused by fast-moving water. You'll notice these mostly in the silence of night when water pressure is generally up quite high.

A pressure of 40 to 50 pounds per square inch is best. Yet in many areas




REDUCE THE SPEED of rushing water with a pressure regulator inserted just after the meter. borty pounds is about right, untheeked, water pressure may climb to double that much.



ASSORS WATER HAMMER by adding an air chamber to the supply hoe near each fixture. tou can easily make an effective chamber from a 2 length of pipe capped at one end.




DEADEN VIBRATIONS by supporting your water lines every 6' to 8'. Fiber or cubber strips will keep a ratting pipe from making your house structure serve as its sounding board.

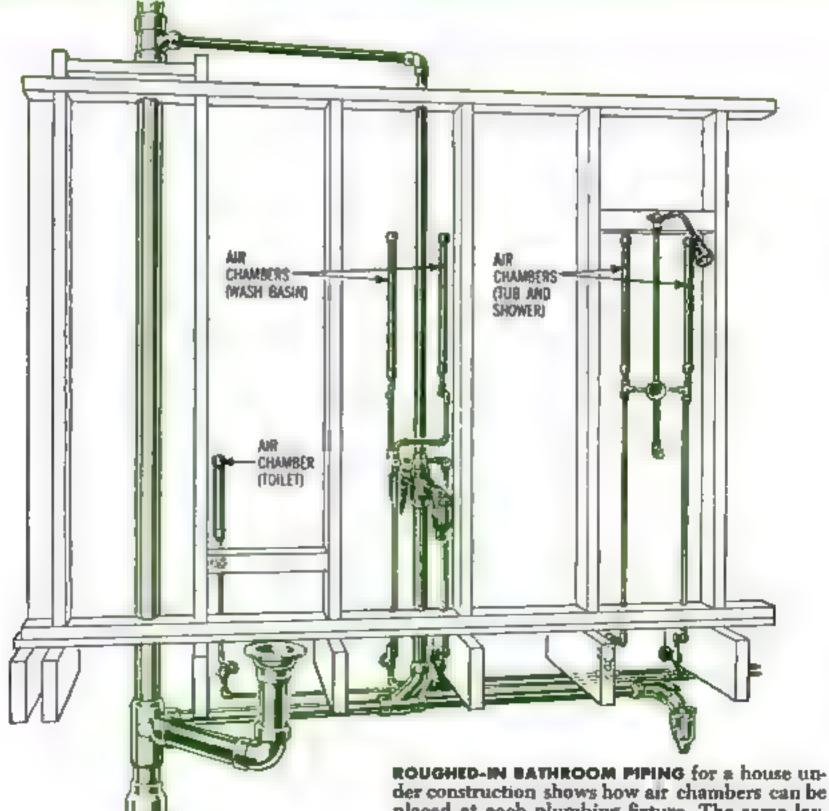


der construction shows how air chambers can be placed at each plumbing fixture. The same lay-out could be used for an extensive remodeling. Are quick-acting valves on your automatic washer making the pipes talk back? Here's a cure

How to Install Anti-Hammer Chambers


1 SHOCK ABSORBER takes impact when water is turned off abruptly. It consists of columns of air trapped in chambers made from simple fittings. Here's what you need: 1. steel wool; 2. torch; 3. solid-wire solder and flux; 4. two

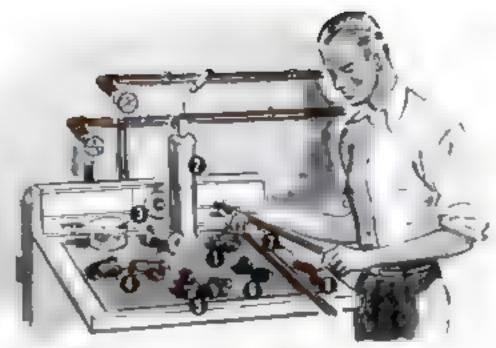


reducing tees (¾" copper to ½" copper to ½" copper); 5. two adapters (¾" copper to ¾" inside threads); 6. two ¾" brass plugs; 7. two ¾" lengths of ¾" rigid copper tubing; 8. two ½" copper nipples, each 1" long.

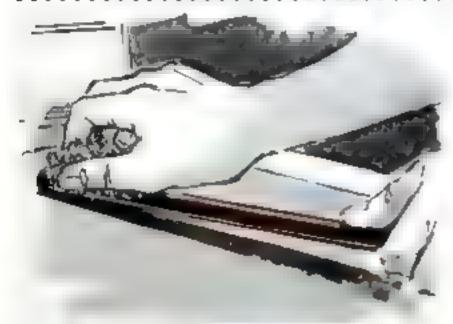


3 SURNISH ALL TUBE ENDS and interiors of fittings with steel wool or sandpaper. Unless you remove exidation from copper, solder won't completely bond and seal the joints. Doing the job right the first time will pay off.

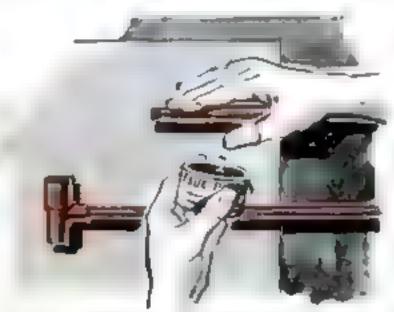

4 SMEAR FLUX ON WATER-LINE ENDS and slip reducing tees over them as shown. Heat the joints until solder held against them flows freely into the connections all around. Do the same with all successive joints.

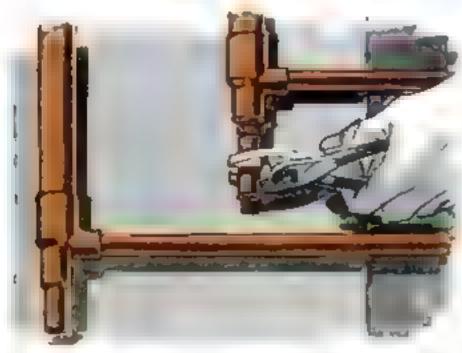

6 cooks with 1"-long nipples. You may find that you have to spread the water lines slightly apart in order to provide sufficient clearance for the sill cock on the upper line.

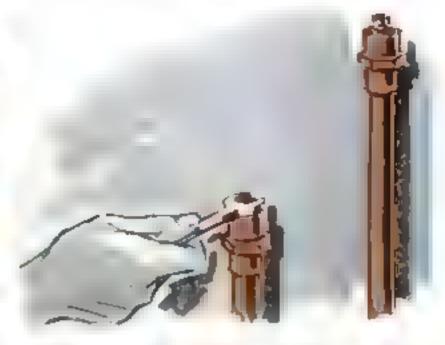


7 THREAD BRASS PLUGS TIGHTLY into the adapters at the tops of the anti-hammer chambers. A tight seal is important to prevent air leakage. Remove excess soldering paste from all joints with wood alcohol.


164 POPULAR SCIENCE



2 Solder and remove elbows behind the sill cocks from copper tubing. Back up joints with a piece of sheet metal if working close to a wall that could be scorched by flame.

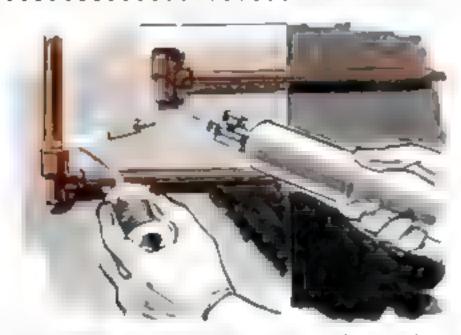

5 solder AN ADAPTER on one end of each 2' length of %" rigid copper tubing. Then solder the opposite ends of the tubing in the %" receptacles of the reducing tees. These tubes will be the anti-hammer chambers.

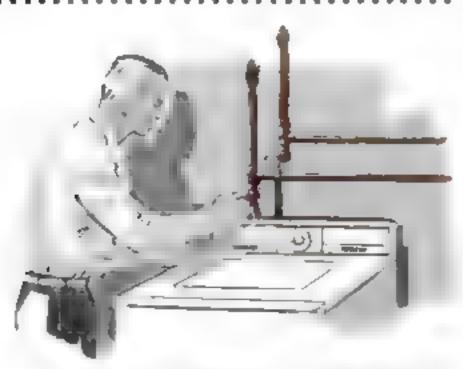

O TURN ON THE WATER. A shock-cushion of O air will be trapped in each anti-hammer chamber. If the chambers eventually become waterlogged, drain the lines and remove the plugs again to restore their supply of air.

pressure is a joint-jolting 80 to 90 pounds during the day, even higher at night.

When you suspect pressure is too high, check with the water company. If it is, you can insert a pressure regulator set for 40 pounds in the supply line just after the meter. Cost: \$12 to \$15.

Inadequate piping, also, may cause water-flow noises. The piping may have been too small originally, or become too small because deposits and scale have choked it up. A telltale sign is that you have to open a faucet wide to get a good flow. New piping is about the only cure.

Copper tubing is noisier. If you are accustomed to galvanized plumbing and move to a house with copper, be prepared for more flow noises. Here are ways of keeping such noises to a minimum.

• If the piping is rigidly mounted to floor joists or wall studs, switch to a nonrigid mounting such as wire hooks.


 Back up pipe or tube straps with cushioning rubber or felt, Rainbow packing, a rubber sheeting available from plumbing-supply dealers, is excellent.


 Two or more coats of the asphaltasbestos compound that is sometimes applied to pipes to stop sweating will also insulate against sound.


• Avoid overhead-feed installations when possible. Overhead-supply pipes are noisier than those coming to fixtures from below. That's because an overhead pipe traps air while an under-floor one lets bubbles rise and escape. You can dampen the noise and vibration of such an overhead feed with insulation or non-rigid suspension.

Pipe-insulating materials include glass wool and wool felt. For about \$1 you can get 50' of ½"-by-3" wrapping-type glass wool plus 50' of vapor-seal vinyl tape, enough to insulate 22' of 1" pipe, or 18' of ¾" pipe. Rigid-type glass wool and wool felt is sold in 3' lengths at 20 to 25¢ per foot. Coverings for elbows, tees and other fittings cost about 50¢ apiece.

Rumbling in a hot-water line is usually caused by overheated water. This is most common with side-arm heaters and furnace water-heating setups where temperature control is difficult. What happens is this: When you turn on the faucet the pressure drops along the line and allows super-heated water to turn to steam in the heater coil or furnace knuckle. The more scale in a side-arm coil, the more

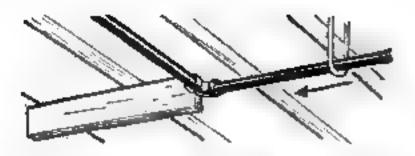





PIPE VIBRATIONS come when water turns a corner. It slams into an elbow and rattles the pipe. You can minimize this trembling by brac-

ing the corner against the direction of flow, using one of the devices shown here: a short board, two pipe hangers or a shelf bracket.

rumble. Worse, clogging makes you heat the water more and more, to get enough. That, in turn, accelerates clogging.

A water softener or filter will extend the life of a heating coil, Serious clogging requires replacement. In a modern water heater with thermostatic control set for 130° to 140°, water won't rumble.

Heating systems sometimes develop loud and persistent hammering or knocking noises. Hammering in steam pipes is usually caused by water trapped in a low spot. When a house settles, a pipe may be lowered out of line, so that water can't drain off properly. Cure: Restore the pipe to its original pitch.

A radiator may knock because it's not level or because the valve is partly open. Shim up the radiator to level it and keep the valve fully open or closed.

2 Prain noises: How to end them

When an upstairs stack passes a living area on the floor below, how can you minimize the sound of the toilet flush? Recommended treatment: Wrap two or three layers of 1" hair felt around the stack, each layer tied with jute twine at 1" intervals. Cover the entire job with a water-proof membrane secured by pipe bands. Existing partitions may not be thick enough to accommodate this much insulation, but in remodeling you can often run the stack through a closet or box it into a corner.

Soil pipes will transfer noise to any partition walls through which they pass. Cure: Insulate them from these walls. It's best to avoid actual contact between pipe and wall. If you can't, then provide a resilient collar, the thicker the better.

When house drains gurgle: You punch an extra hole in the top of a beverage can to let air replace liquid as you pour. Similarly, house drains can't pass out their contents freely without vents to let in air. If sink, bath, or lavatory drains gurgle, though drain lines are clear, or if water goes down with a great sucking noise, it indicates the fixture's drain is not vented, is improperly vented, or its vent is clogged. The sucking noise means the drain trap is being siphoned dry of its water seal, letting sewer gas creep into the house through the waste line.

Here's what to do about it:

• If there is no vent: In existing systems where the cost of installing adequate vents would be prohibitive, most codes allow an anti-siphon trap. This eliminates noise, also protects health.

• If the vent is clogged: A vent requires occasional inspection. If not used, it may become clogged with leaves, twigs or dirt. In winter, it may get choked with frost, especially if its size at the roof line is under 3". Just below roof line use an increaser fitting to step up 1½" and 2" vent pipes to 3" or 4"

• If the vent is inadequate: If the trap is over 5' from a vent, install a vent closer, or use an anti-siphon trap.

3 Faucet chatter: How to silence it

A loose faucet part may cause pipe chatter. See if both washer and screw are tight. Next check the threaded faucet spindle and the housing into which it fits. Are they worn? Replace them.

Some noise is due to poor faucet design. A whistle in faucet or valve indicates too-close clearance there Cure: Replace with a better faucet.

Wobbly chairs? If you don't have the problem now, you probably will sooner or later. This fact sheet is designed to help you with the job when it comes along. Save it—along with others you'll find every month in POPULAR SCIENCE.

Next Month: Squeaking floors.

Popular Science Fix-It File



TOOLS AND MATERIALS YOU MAY NEED: Top row: clamping rope and dowel, turnbuckle, wire, glue. Center row: sandpaper, corner block, inside-corner angle brace, glue injector, wood putty, metal fasteners. Bottom row: wood file, knife, rung fastener.



How to tighten loose joints



GLUE INJECTOR (about \$2) will reinforce joints that are still fairly snug, but need regluing. Bore a hole (nto the joint with the tool's drill attachment, using tape as a depth stop. Then remove the drill, fit the injector needle into the hole, and press the plunger, forcing glue into the joint. Fill the hole made by the plunger with wood putty.

REMOVE OLD GLUE from joint surfaces with a rotary cutter, file or knife, before regluing. Apply plenty of new glue (preferably plastic resin), thickened with fine sawdust if necessary for a snug fit. Wipe away any squeeze-out of excess glue with a damp cloth.




WEDGES OR RUNG PASTENERS make very loose joints tight again. A satisfactory wedge can be cut from a clothespin if other hardwood is lacking. Inserted in a saw cut (above, left) it expands the rung when driven home. Metal rung fasteners (right) have cleats that bite into both joined members of the chair, acting as locks as well as wedges.

STEEL BAR CLAMP, used with cushioning blocks, is best for drawing joints together and bolding them until glue sets. But clotheshine, twisted taut with a dowel, makes a good substitute. The dowel end is tied to the line, as shown, to maintain tension.





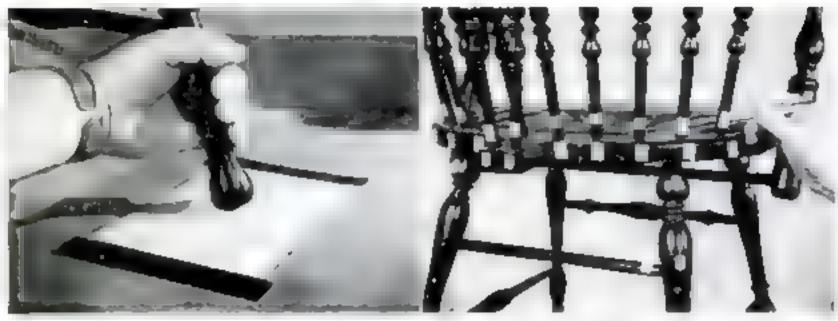


CHAIR LEGS THAT TEETER after reglaing, or leg ends that do not rest flat on the floor, put a strain on joints and mar floor finishes and coverings. Tape coarse sandpaper to a flat surface and work legs back and forth on the abrasive until the bottoms are even. KEY THE JOINTS before taking a chair apart for regluing, to insure correct reassembly. Small pieces of adhesive tape make good numbering tabs. Chairs are easier to disassemble if they are stored in a warm, dry spot for several days before you start the job.

How to repair seat-frame members



STIFFEN LOOSE SEAT-FRAME JOINTS with hardwood corner blocks either glued, or glued and screwed, in place. Use inside-corner angle braces to strengthen leg-frame

joints. Alternate way is to use special metal fasteners with curved teeth that draw the parts together as they're driven home. The fasteners come in several sizes.

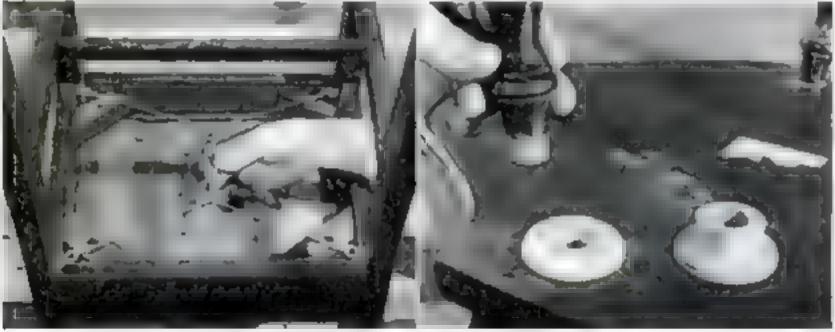

snug up wossly rails like this. Turn screw eyes into back-post and front-leg corners; then join each pair with a length of wire passed through the eye of a turnbuckle. Tighten turnbuckle until wires are taut.

HARDWOOD PLUGS, turned on a lathe and bored to take leg dowels snugly, solve the problem of greatly enlarged or out-of-round seat sockets. Enlarge the sockets to accommodate the plugs. Use glue for assembly.

PRIMAR SCHOOL REFERENCE BEART IN Math Short Cuts for the wner

Where to find the facts...

Calculating Distances	2
Figuring Heights	3
Measuring a Diagonal	3
Dividing into Equal Parts	3
Gauging With Coins	4
Working Without a Square	4
Squaring by Diagonals	4
"Tan" Table for Mitering	5
Beam Strength; Stiffness .	6
Reinforcing Concrete	6
How Much Concrete?	7
How to Figure Lumber .	7
Cutting Framing Costs	7


How to Figure Flooring	7
Estimating Cedar Shingles	8
How Much Paint?	8
How Much Wallpaper?	8
How Big a Pipe?	9
Cylindrical Tank Capacity	9
Spherical Tank Capacity	9
Fuse Sizes; Circuit Loads	9
Fahrenheit and Centigrade	10
Nail Sizes	10
Making a Weaker Solution	10
What Pulley Size?	11
Surface Speed	11

Measuring

Calculating distances. How can you figure the distance to an object you can't get to? Starting at the point from which you want to take your measurement run a line at right angles to the direction of measurement. Drive two stakes on this line, one 10 yards from

Next, run a line back from the 15-yard marker at right angles to the first line Extend it to a point from which you can sight across the 10 yard marker to the distant object. Drive a stake here. Measure the distance between this stake and the 15-yard marker, double it, and you have the desired measurement. You can substitute any pair of distances for the 10- and five-yard spacing of the stakes on the first measured line.

The unknown distance and the known distance of the second line will always be in the same proportion as the pair you choose

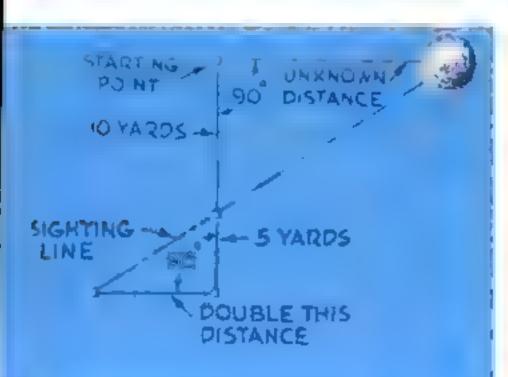


reach a Page a no Patrick of a

Figuring heights. Try this when you can't take a direct vertical measurement-the height of a tree, for example. Measure the length of the object's shadow. Then measure the shadow cast by a vertical stick of convenient length—say 36". Assume that the object and the stick cast shadows 192" and 23" long, respectively. Using the fact that the height of the object (H) is to its shadow as the height of the stick is to its shadow, you get 36":23"-H:192". Multiply the two outside figures (36" x 192") and divide by the known inside figure (23"). The result is $300\frac{1}{2}$ ", or just over 25'.

Measuring a diagonal. To estimate the length of the diagonal side of a right triangle—the required length of a rafter, perhaps—add the squares of the two shorter sides together and find the square root of this figure.

Say a rafter must have a rise of 2' in 10', or 24" in 120". Multiply each of these latter figures by itself and add the products: 576 plus 14,400=14,976. From a table, by slide rule, or arithmetic, find the square root of 14,976 (122,37", or about 10' 2\%"). That's your rafter length.

Dividing into equal parts. There's no need to bother with fractions when you want to divide a board of odd length into a number of equally wide strips. Just lay a rule across the board at such an angle that the diagonal measurement, in even inches, is easily divided by the number of strips you want. For example: You need four strips and the board is 11½" wide. Lay your rule on an angle that gives a 12" reading. Mark the board at 3", 6", and 9". When you scribe through these points you'll have equally spaced guide marks.

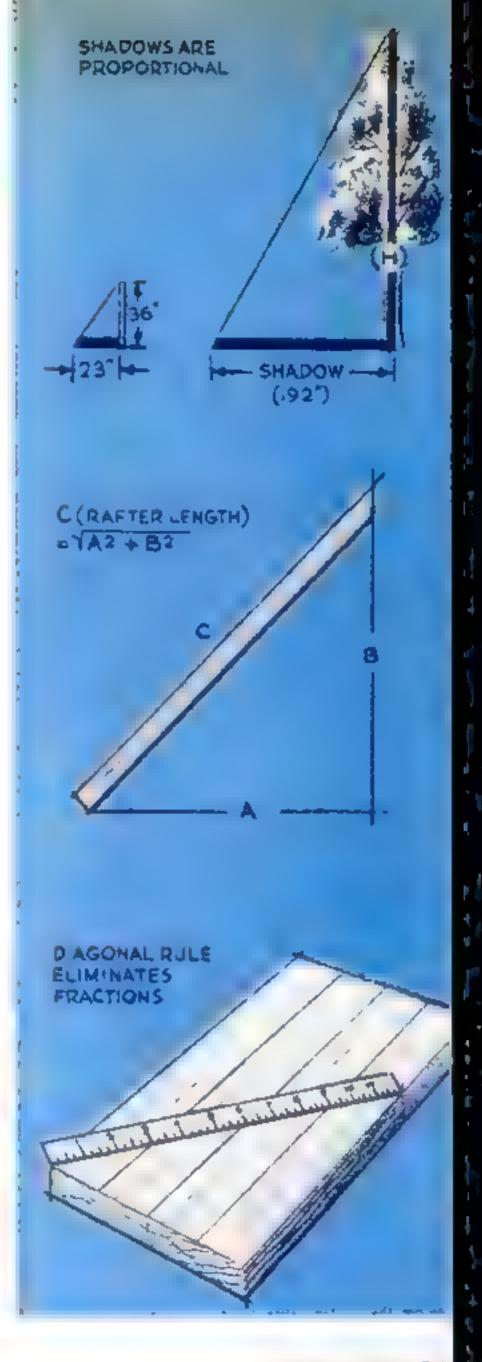

Gauging with coins. Ever been caught without a ruler when you needed to know the thickness of a board? Money will help. The diameter of a U. S. cent is 3/4". Hold a penny against the edge of the stock and you can judge its thickness: 5/8", 3/4" or whatever.

Coins are also handy for determining the nominal sizes of steel water pipe. If the inside diameter of a pipe is about half the diameter of a quarter, it's nominal 3/8" pipe. If it's somewhat smaller than a dime, it's 1/2" pipe. If a penny fits inside loosely, you have 3/4" pipe. In 1" pipe a quarter will fit loosely, but a half-dollar won't go. If the opening is twice the diameter of a dime, the pipe is 11/4". Combined diameters of a nickel and a penny approximately equal the inside diameter of 11/2" pipe. A half-dollar and a nickel add up to 2" pipe.


Plotting squares and angles

Working without a square. How can you square a project if you don't have a square, or true the corner markers for a building? Use the fact that a triangle whose sides are in the proportion of 3-4-5 is a right triangle.

With lines running both ways from a corner of your project, mark off 3' in one direction, 4' in the other. Run your tape from mark to mark. Move one of the lines until the distance between marks comes to exactly 5'. You have a precisely accurate 90° corner.

Squaring by diagonals. Say you've driven temporary stakes, and run lines for a building. You've made each pair of sides of exactly equal length. Other than by squaring a corner, how can you find out whether you have a true rectangle or square?

Measure the diagonals. If they're equal, all corners are square. If one diagonal is longer, shift the stakes.

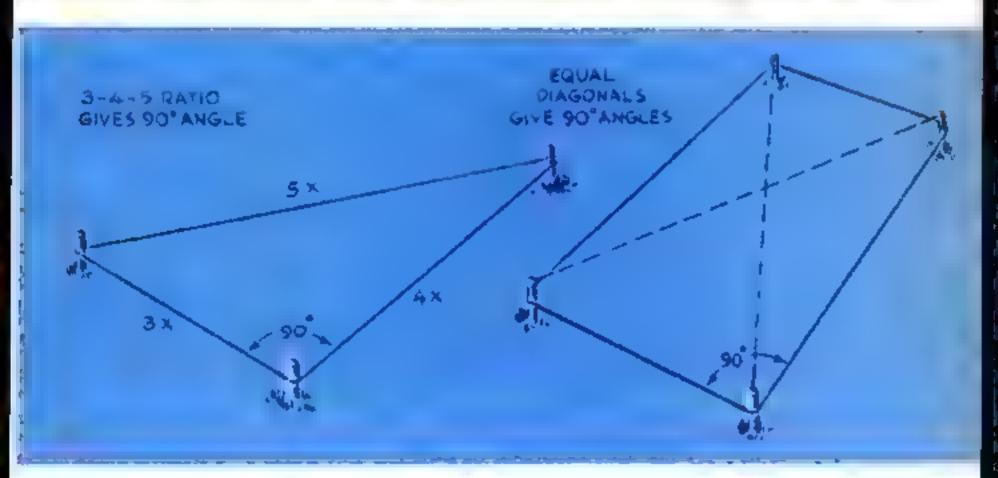


Angle	Tan	Angle	Tan	Angle	Tan	Angle	Tan	Angle	Tan	Angle	Tan
0°	.0000	15°	2679	30°	.5774	45°	1.0000	60°	1 7321	75°	3.7321
1°	.0175	16°	.2867	31°	6009	46°	1.0355	6l°	1.8040	76°	4.0108
20	.0349	17°	.3057	32°	.6249	47°	1.0724	62°	1.8807	77°	4.3315
30	.0524	180	.3249	33°	.6494	48°	1.1106	63°	1 9626	78°	4 7046
40	.0699	19°	.3443	34°	.6745	49°	1.1504	64°	2 0503	79°	5 1446
50	0875	20°	.3640	35°	.7002	50°	1.1918	65°	2 1445	80°	5.6713
60	.1051	21°	.3839	36°	.7265	51°	1.2349	66°	2.2460	81°	6.3138
70	.1228	22°	.4040	37°	.7536	52°	1.2799	67°	2 3559	82°	7 1154
80	.1405	23°	.4245	38°	.7813	53°	1.3270	68°	2 4751	83°	8 1443
90	.1584	24°	.4452	39°	.8098	54°	1.3764	69°	2 6051	84°	9 5144
10°	.1763	25°	4663	40°	.8391	55°	1.4281	70°	2 7475	85°	11 4301
11°	.1944	26°	.4877	41°	8693	56°	1 4826	71°	2 9042	86°	14.3007
120	.2126	27°	.5095	42°	.9004	57°	1 5399	72°	3.0777	87°	19 0811
13°	.2309	28°	.5317	43°	.9325	58°	1.6003	73°	3.2709	880	28 6363
140	2493	29°	.5543	44°	.9657	59°	1.6643	74°	3.4874	89°	57.2900

"Tan" table for mitering. The accompanying table will often give you the miter setting for power sawing.


A tangent ("tan") of an angle in a right triangle is simply the length of the side opposite the angle, divided by the side that with it forms the right angle. Here's how to use tans. You have a two-by-six, actual width 5\%". You want to set your saw to cut from one corner to a point 3"

from the opposite corner. Divide 3 by 5% to get .5333. The nearest figure to this on the tan table is .5317, which

is close enough for most shop purposes. That's tan 28°—which is your setting for a radial-arm saw. For a table-saw miter-gauge setting, subtract 28° from 90°. To get a miter-gauge setting directly, figure the tangent of the other acute angle, instead. (Divide 5% by 3 to get 1.875—tan 62°).

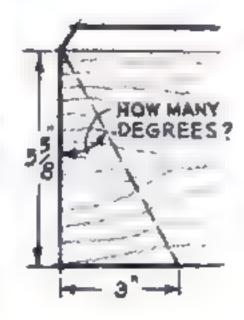

Structural strength

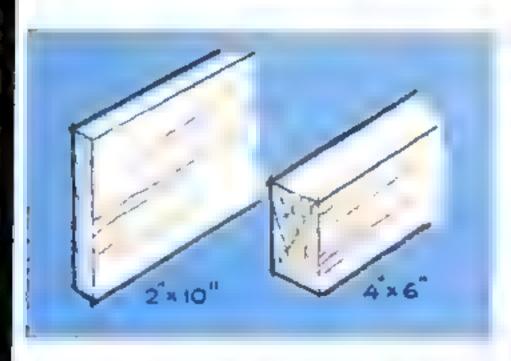


Beam strength. Comparing the crosssectional areas of two beams does not necessarily give you their relative strength. For example: A full twoby-ten joist will take about a 39-percent greater load than a full four-bysix, although it weighs and costs onesixth less. Use the following formula for determining load-bearing strength: Square the dimension in the direction of the stress, and multiply that figure by the other dimension. With the twoby-ten you get 10x10x2, or 200, as against 6x6x4, or 144 for the four-bysix. The difference in strength between dressed lumber and its nominal size is so slight that for practical purposes it need not be considered.

Beam stiffness. Stiffness refers to how much a beam will bend under a given weight. The formula for determining it is: width, multiplied by the cube of the depth.

Comparing a full two-by-ten with a full four-by-six, you have 2x10x10x10 vs. 4x6x6x6, giving a ratio of 2,000 to 864. So although the four-by-six contains more lumber and costs more, it will sag 21/3 times as much as the two-by-ten beam when it is carrying the same load.

Reinforcing concrete. Here's a trick that makes reinforcing rods or mesh do the best possible job of internal bracing. Remember that concrete is strong under compression, but weak under tension. So place the rods where the concrete will tend to pull apart under load. In other words, if a slab is to be supported centrally, place the reinforcing rods high in the concrete. On the other hand, if the slab will be supported at the ends, embed the rods near the bottom. Either way, be sure that they are far enough from any surface to be strongly keyed in the concrete.

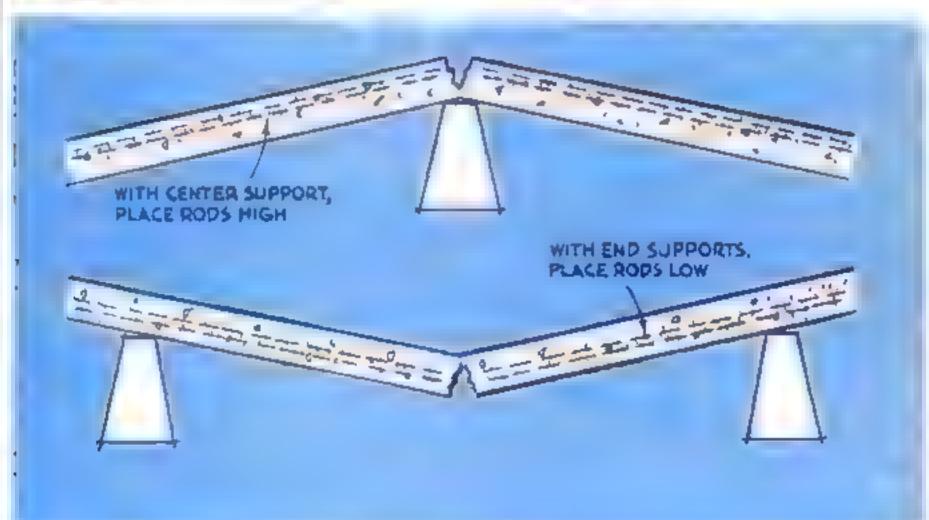

Estimating materials

How much concrete? To find the amount of concrete needed for a slab, multiply the length and width, using feet, then divide by the number of times the thickness, in inches, goes into 12, for the cubic footage. Order four yards of concrete for each 100 cubic feet and you'll be allowing eight percent for waste. Here's an example: You want a 6" slab for a 12'-by-20' garage. Divide 240 by two and you get 120 cubic feet. Five yards will do the job.

How to figure lumber. The number of board feet in a piece of lumber is simply the square feet (width in feet times the length in feet) multiplied by the number of inches it is thick. But there's one gimmick—if a board is less than 1" thick, it's still figured as 1". Lumber prices are quoted by the board foot, or by the hundred or thousand board feet.


Cutting framing costs. Two-by-fours, two-by-sixes, etc., come in standard lengths, starting with 8' and increasing by 2' steps. When you need odd-foot lengths, don't order the next even-foot size. Instead, order lengths that you can saw into two or more odd-foot lengths.

Where short two-by-fours are needed, another way to cut costs is to use the less-than-8' leftover lengths stocked by most lumberyards.

How to figure flooring. To estimate the amount of hardwood flooring you'll need for a room, multiply the length by the width to get the number of square feet of floor area. Then check the first column of the table at right for the size of strip flooring you plan to use. Note


the corresponding percentage listed the second column. Increase the nuber of square feet of floor area by percentage and you have the number board feet of flooring required, incl ing an allowance for wastage.

To estimate tile flooring, find square footage of the room and mult; by four to determine how many by-6" tiles you'll need, or by 16/9 the number of 9"-by-9" tiles. If you tile diagonally, add 4" to both room mensions when figuring square foot.

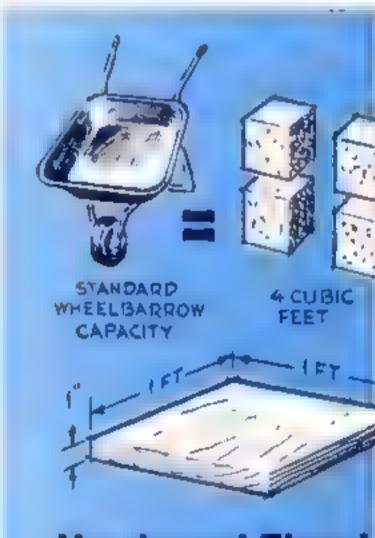

Hardwood Floori

Strip-Flooring	And to S
25/32" x 344"	27%
25/32" x 2½"	36%
25 32" x 1 ½"	53%
12" x 212"	23%
12" x 2"	40%
36" x 2"	28%
%" x 1√2"	36%

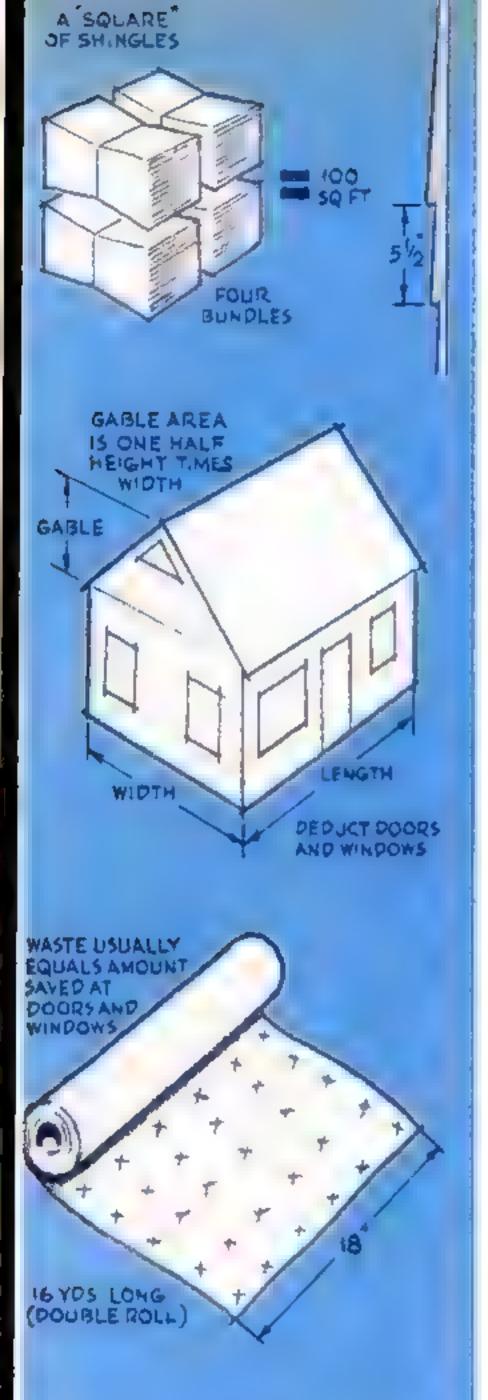

ard unit of packing for cedar shingles is a "square"—which means 100 square feet of roof when used in a particular way. Four bunches of 16" shingles make a square—or cover 100 square feet when exposed 5" to the weather. A four-bunch square of 18" shingles covers 100 square feet, 5½" to the weather. A three-bunch square of 24" shingles covers 100 square feet, 10" to the weather.

How much paint? When painting the exterior of a house, figure the number of square feet of area to be covered. (For a gable, multiply the width at the base by the height, and divide by two.) Subtract door and window areas. Add 10 percent to any area covered by narrow lap siding, 20 percent to any that is unusually rough or porous, 30 percent if corrugated. For the first coat on concrete blocks add 50 percent.

Multiply your final figure by the number of coats you intend to put on, then divide by the manufacturer's square-feet-per-gallon coverage figure. When this figure isn't available, divide by 500 to get the minimum number of gallons you'll need.

How much wallpaper? Although wallpaper is calculated on the basis of single rolls, it is actually sold in what are called double rolls 16 yards long and 18" wide.

For a quick figure on the number of rolls needed for a room, measure the distance around the room in yards and multiply by two to get the number of strips needed. Then measure the strip length you'll need and divide 16 yards by this to see how many strips you can get from a roll. Divide the total number of strips by this to find out how many rolls you will need. Savings at doors and windows usually allow for wastage.

I I MATH SHORT CUTS FOR THE HOME OWNER

Capacity

How big a pipe? How much flow a water pipe will deliver depends upon more than its inside diameter. (Pressure, pipe length, and lift are also involved.) But you can quickly compare the capacities of any two pipe sizes if you remember that they vary as the squares of the diameters. That's why pipe with a 11/2" opening will deliver more than twice as much water as 1".

Cylindrical tank capacity. Remember that a circle has approximately threefourths the area of a square drawn around it, plus five percent of this figure. Multiply this total by the height or length of the tank in like units of measurement to get the volume. Convert to cubic feet and multiply this figure by 7½ (there are approximately 7½ gallons to a cubic foot).

Spherical tank capacity. A sphere has approximately half the volume of a cube drawn around it, plus five percent of the figure arrived at. Again, multiply the cubic footage by 71/2 to get gallons.

Fuse sizes. Inspect your fuses with these general rules in mind. A circuit to which permanent lighting is connected usually has No. 14 wire and should be protected by a 15-amp fuse. An appliance circuit for plug-in receptacles will usually not have wire larger than No. 12, and should be protected by a 20amp fuse. Don't use 30-amp fuses on such circuits.

Circuit loads. Can you add an electric heater to one of your house circuits? Add wattages of all lights and appliances on the circuit to the heater wattage. Divide by 110 to find the amperage that will be drawn.

AS SQUARES OF County by his A CYLINDER HAS ABOUT 3/4 THE VOL-UME OF AN ENVELOPING RECTANGULAR TANK A SPHERE HAS ABOUT V2 THE **VOLUME OF AN** CUBE HEATER IRON 1300 W. 800 W. FUSE IDO W 20 A.



B 10 MATH SHORT CUTS FOR THE HOME OWNER

Conversion

Fahrenheit and centigrade. The freezing and boiling points of water are at 32° and 212° on the Fahrenheit scale, but at 0° and 100° on the simpler centigrade.

To change a centigrade reading to Fahrenheit, multiply by 9, divide by 5,

then add 32.

Change Fahrenheit to centigrade by reversing that process. Just subtract 32,

multiple by 5, then divide by 9.

There's just one temperature—minus 40—at which centigrade and Fahrenheit scales read the same. You can prove it, using either conversion method above. (Nine times minus 40 equals minus 360. Minus 360 divided by five equals minus 72. Minus 72 plus 32 equals minus 40.)

Nail sizes. These are pretty arbitrary, but the smaller nails fall into a pattern that can take the strain off your memory. Divide the penny size of a nail by 4 and add $\frac{1}{2}$ " to get its length in inches. Or subtract $\frac{1}{2}$ " from the inch length of a nail and multiply by 4 to get its size. Thus an 8-penny (8-d) nail is $2\frac{1}{2}$ " long $(8+4=2; 2+\frac{1}{2}=2\frac{1}{2}.)$

But remember this works only for nails up to 10-penny (10-d) or 3".

Making a weaker solution. You often need to change a strong solution to a weaker one, particularly when working with acids. Here's the formula: Multiply the amount of solution you have by its strength in percent. Divide this by the percent you want. Subtract the amount of solution you started with. The result is the amount of water to add.

Example: To turn 16 ounces of 50percent solution to 28-percent, 50 x 16-

800. Divide this by 28 and subtract 16. This gives you 12.57—the number of ounces of water to add.

One important caution: Don't add water to sulphuric acid. Add sulphuric acid to the water.


What pulley size? When stepping up or reducing speed with pulleys, you're dealing with four factors: motor speed, drive-pulley diameter, driven-shaft speed, and driven-pulley diameter. You know three of these factors and you want to find the fourth.

This is the way to figure it: Take the pulley of known diameter and speed (this may be actual or desired speed). Multiply speed by diameter and divide the result by the known diameter or speed (again, actual or desired) of the other pulley. The result is the missing figure.

For instance: Your joiner has a 21/2" pulley and you want it to turn at about 4,200 r.p.m. What size pulley should you put on your 1,725-r.p.m. motor to run the joiner at that speed?

Multiply 4,200 by $2\frac{1}{2}$, then divide by 1,725 and you get just over 6. Using a 6" pulley on the motor shaft will do the trick for you.

Surface speed. Revolutions per minute often must be converted into surface feet per minute to give you the recommended speed for a sanding drum or sanding belt (too high a speed will scorch the material). Knowing the desired surface feet per minute, you can determine the required r.p.m. for the drum or the driven drum on a belt sander. Divide the surface-feet-per-minute figure by the drum diameter in inches multiplied by .262. Once you have the r.p.m. figure, use the preceding pulley formula to get the required belt-drive ratio.

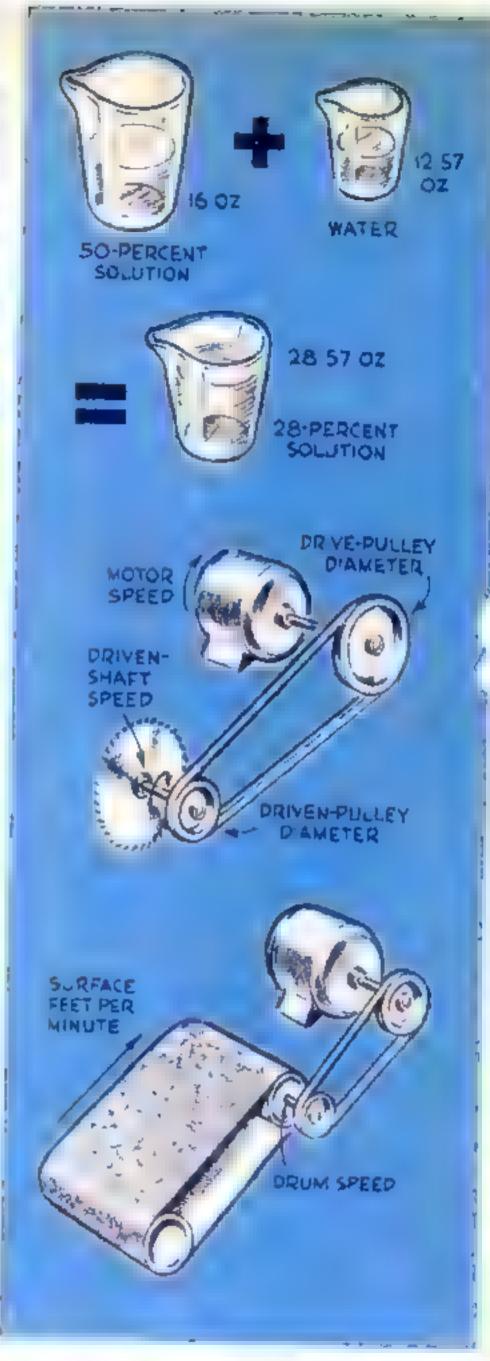

P.S. EXTRA: YOUR TEAR-OUT BOOKLET NO. 6



T place your left hand on the facing magazine page, grasp the booklet with your right, and pull it gently away.

After reading, file for future reference. You'll find it valuable on many home jobs

December 1957
POPULAR SCIENCE

6 Tricks with Drawer Knobs

them as feet. Small wooden knobs available at hardware and dime stores can be used as ornamental feet for small cabinets and boxes. Remove the screw and glue each knob in place. Sand a flat on the knob if it is overly rounded.


2 Need a yardstick handle? Picking up a yardstick off glass or other smooth surfaces is tough on fingernails. It won't be if you attach a small knob.

3 Glamorize them. Add a sparkly touch to the drawer knobs of a dresser being built or refinished for a girl's room by gluing a dime-store glitter button to each.

4 Frame them. Knob too small for a large expanse of cabinet door or drawer? Frame it with half-round molding to save the replacement nuisance.

5 Back them up. Painted washers or sheet-metal disks mounted behind wooden knobs keep drawers from being scarred by fingernails when they're being opened, and add a decorative touch, too.

6 Painting is easy. Fasten knobs to a cardboard and the job is a cinch.

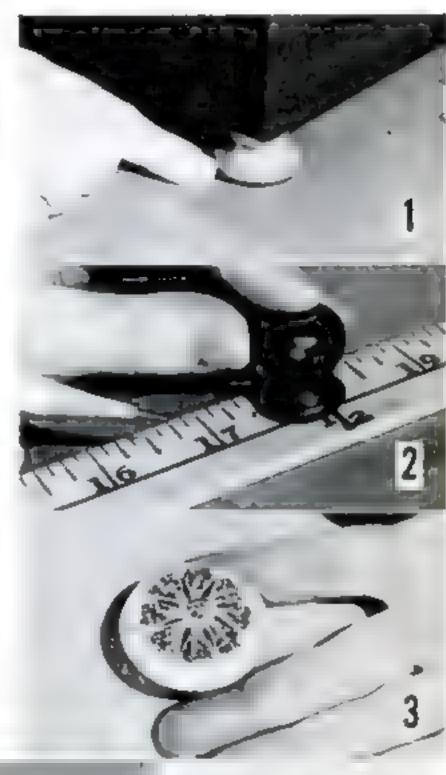



New Record Tests Hi-Fi Systems With Music

• Last January Popular Science introduced a high-fidelity test record. The response was enthusiastic. Nearly 50,000 were sold and it is still a popular item in record stores all over the country. Now the editors have developed a second record to complement the first. This article tells you what it is and what it will do in testing and upgrading a hi-fi system.



By Hubert Luckett

equipment you have, the practical test of any hi-fi system is the way it gives out with real music. You can make that test with the Popular Science Test Record, Volume IL It's called "True Sounds of Musical Tones."

Right now your hi-fi system may be free of bugs. But there's a compelling reason for having a test record such as this handy. Unless a hi-fi outfit gets regular tune-ups, its performance will probably slip—maybe so gradually that your ear will hardly notice.

But the new record is something more than just a test for telling how good your rig is. It is practical, too. It can:

- Improve the system you have now.
- Help you buy new equipment.
- Show you which component to replace next if you are in process of upgrading your outfit.

A manual that comes with it shows how to use the record for specific tests. It explains what's behind many of the characteristics that make up a good highfidelity system. To make the tests, all you need is a pair of attentive ears.

To start with, the test for your set's frequency range—particularly its response to the growling low notes—will also test the optimistic performance claims you read in the ads. You'll find that really low bass reproduction is ex-



pensive, and that plenty of high response may be cheap but does not necessarily give you musical realism.

Dynamic range, the contrast between loud and soft sound, gives music excitement and variety. Controlled variations on the test record in recording the same music provide you with a positive check on this quality.


You can also check transient response —the ability to start and stop sudden impulse sounds cleanly—in ways that will help you pinpoint any offending part.

There's a bonus with this record, too. Besides the technical tests, there are solos by 11 different instruments, excerpts from orchestral recordings, and some of the liveliest percussion sounds you've heard.

Frequency range: This is the characteristic most often plugged by hi-fi salesmen. They give you the pitch that their particular equipment covers a frequency spread "from 20 to 20,000 cycles." But even for the most elaborate outfit that claim rarely describes the range of sounds you actually hear.

Frequency Ranges of Musical Instruments

INSTRUMENT SOUNDS used in the new PS test record are represented in the chart to the right. The black lines show the range of fundamental tones. The colored lines show the range of frequencies your system must cover if it is to reproduce, without audible difference, the live sound of the instrument. With the PS record, you will hear how closely your rig approaches this ideal.

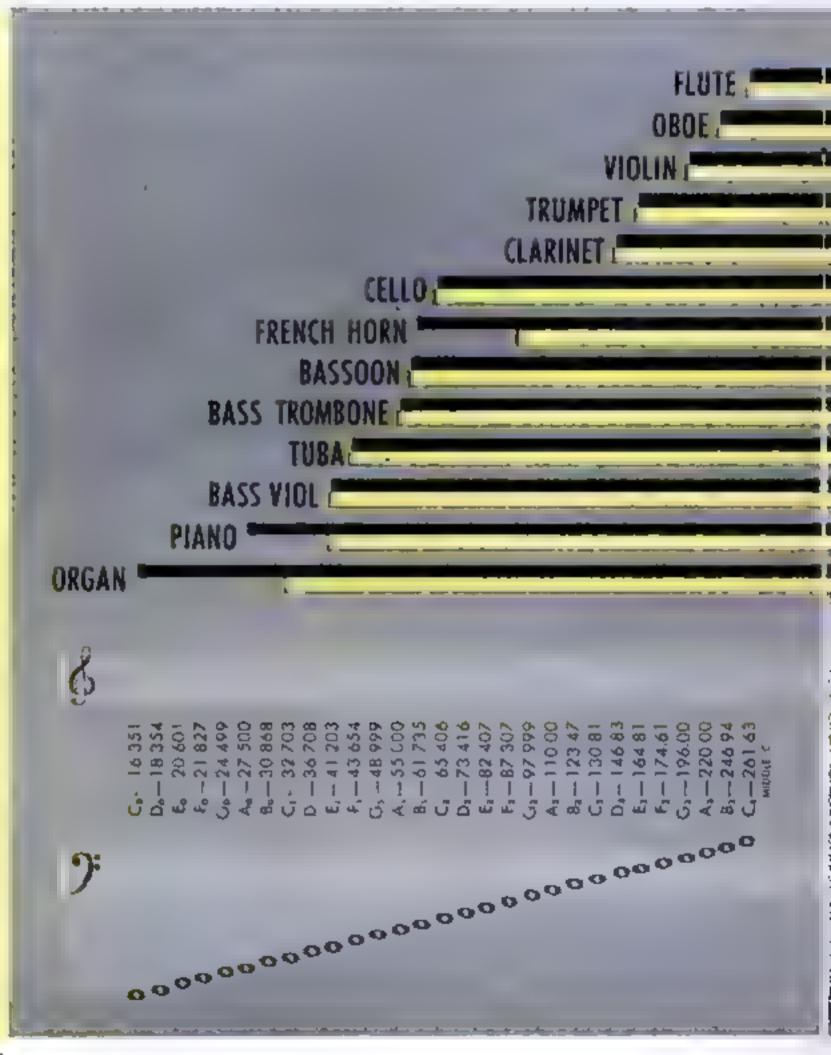

Now the hi-fi salesmen and magazine ads may be absolutely honest in referring to a signal that can be detected at extremes of 20 cycles and 20,000 cycles. But to you as a buyer, the important point is: How much will you hear at a satisfactory volume and with musical effect?

The new POPULAR SCIENCE record lets you decide two crucial questions for yourself: How much range do I really need? What will my outfit actually deliver? You'll find the answers by testing for response at the low and high ends.


The low (bass) frequencies come first.

These are the most disticult, equipmentwise, to reproduce. When you spend over \$300 for hi-fi gear, most of the additional money goes for improvement here.

The PS Test Record checks out bass response by having each musical instrument play alone, and run down the scale to its lowest note.

You hear each note twice. The first tone is for reference. It is a superbly accurate recording of the instrument's sound. For the second sound, frequencies below 120 cycles are blocked by a filter.

The two side-by-side tones will thus

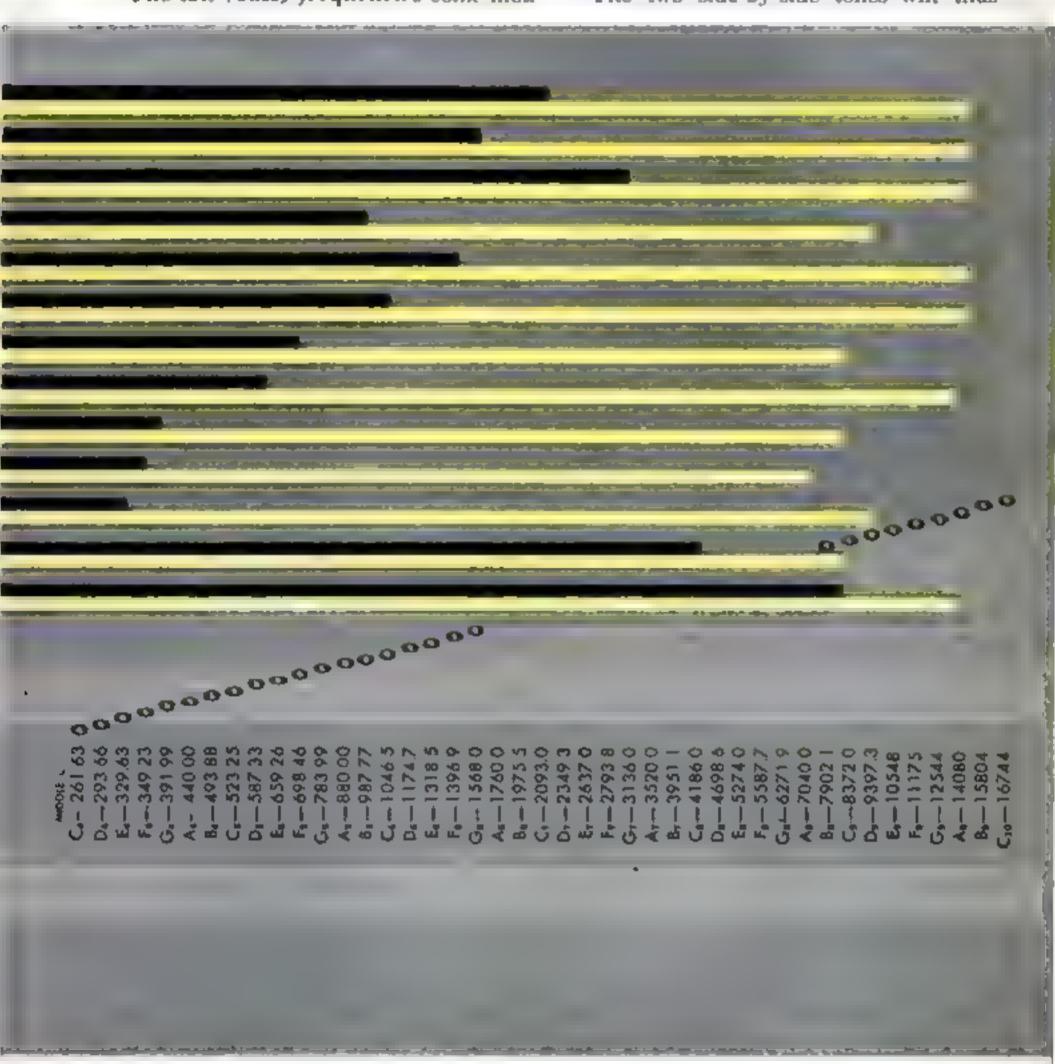



At the studio: recording date

HOW IT WAS DONE: The PS Test Record, Volume II, was recorded at Reeves Sound Studios in New York. Fairchild tape recorders and a single Telefunken mike were used. The original lacquer master discs were cut on a Hydrofeed lathe. From this, nickel stampers were made. Pressings are done by Urania Records in limited runs: 500 records per stamper. That's PS Technical Editor Luckett with the hand mike, supervising the recording. Engineer Jack Matthews of Recves is at the controls.

sound identical until they pass the filter's cut-off point. After cut-off, you will hear a distinct difference between the two tones only if your rig can reproduce at full volume below 120 cycles. The more difference you hear, the better the response you are getting at that particular bass tone.

This test is repeated with different instruments, and also with a 65-cycle cutoff filter.

The filtered tone simulates the performance of a speaker that begins to lose output below 120 cycles. If the two tones sound alike below that frequency, then your speaker is falling off in output about

the same way the filtered tone has been caused to do in the recording.

Although the filter, or your speaker, blocks out the low, fundamental part of the tone, you still hear what you think is the proper note. The reason is partly in the nature of musical tones and partly a trick of your hearing.

A note from a musical instrument has a fundamental frequency, which determines pitch, and a series of overtones of higher frequencies. The filter used in the test cuts out the low tones but lets the higher overtones pass through. The result is that your ear imagines that it hears

[Continued on page 228]

How to Order Popular Science Hi-Fi Test Record No. 2

The new disc, "True Sounds of Musical Tones," is available to PS readers at a prepublication price of only \$2.50 for one, \$4 for two, directly from Magazine Services, Inc. But order by Jan. 31. The price will go up Feb. 1 to \$3.50 for one, \$5 for two (still a special price for PS readers).

Hi-Fi Test Record No. 1 Is Still Available

You can still get the popular Test Record No. 1, which 50,000 readers of Popular Science have used effectively. It features succep frequencies, sine-wave tests, tones for tuning speaker enclosures, a sound-effects quiz. The price (special to PS readers) is \$3.50 for one, \$5 for two.

TO Order Send cash, check or money order to Magazine Services. Inc., Dept. 1257, 104 E. 26th St., New York 10, N.Y. Local record stores that carry Urania records will also have them, at higher prices.

A grease job covers major points, but how about those squeaks that remain? To get rid of them, try:



Lubing the Spots the Grease Man Misses

By E. F. Lindsley

HEN you splurge on a dollarand-six-bit grease job you probably get your money's worth of high-pressure gunning at the runninggear fittings, and a quick check on the drive-line gear boxes. But your grease man is one in a hundred if he bothers to hand-feed the dozens of little friction spots that hide in a car's dark corners. These dry and chafing small fry are as

ONE FRICTION SPOT the grease man seldom troubles to lube. Yet binding heater and venti-

lator controls can cause distraction when you're on the road. Oil the pivot points and cables.


How to frictionproof a hood



TAKING FIGHT OUT OF THE HOOD: It will open easily and close securely if you (1) clean accumulated dirt and rust from the latch and release mechanisms; (2) apply 10-W oil to the moving parts, dabs of light grease to the striker.

tube the hinges, too, with a few drops of oil at pivot points (this goes for trunk-lid hinges as well as those beneath the hood). A long-nosed, pump-type squirt can filled with light oil is handy for reaching such trouble spots.

In the engine compartment,

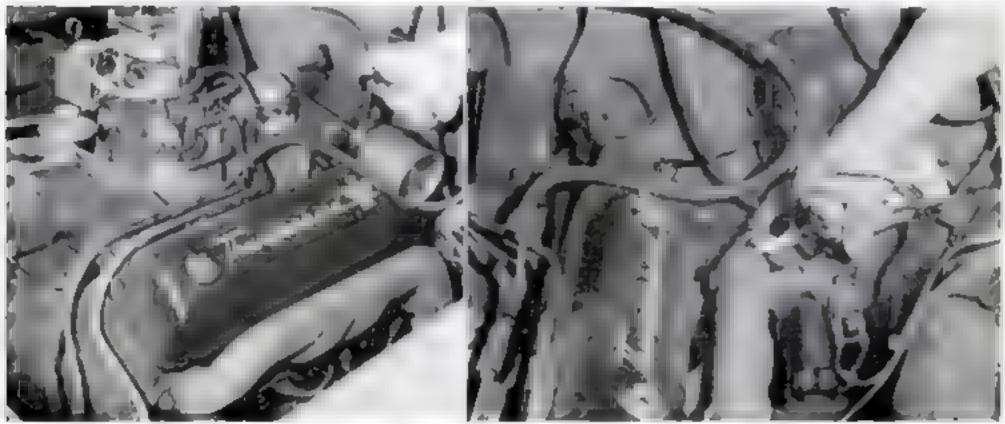

FREE-WORKING THROTTLE and consistent idling speed that prevents "stop-light creep" are insured by clean and oiled linkage. Stickiness here often prevents a return to full idle, also makes a car seem heavy-footed on the road.

TRANSMISSION CONTROLS, both manual and automatic, can usually stand cleaning and lubricating. Oil tends to deteriorate rubber bushings. If the bushings are worn, or soft and gooey, you can replace them for a few cents.



RUSSER HOOD-SEAL STRIP may cause odd popping and squeaking noises due to slight movements of the hood. The treatment for this and other chafing rubber parts is stainless stick lubricant, or a once-over with brake fluid.

common to models just off the assembly line as they are to the 100,000-milers. They take the form of hard-to-crank windows, stubborn heater and ventilator controls, balky hood releases, and fingernail-splitting glove-compartment latches. They announce themselves with irritating squeaks and groans that harmonize like a pondful of frogs. One, you could live with. But collectively they can add up to a din that takes the joy out of driving


You can silence these friction bugs by devoting an hour or so every 2,000 miles to systematically dabbing grease and dribbling oil. You'll find a long-nosed, pump-type squirt can handy for the hard-to-reach spots. Keep it filled with SAE 10-W oil. On broad aliding areas use a light grease of the tube variety. Apply stainless stick lubricant or brake fluid to door and window weatherstrips and rub blocks (never use oil or other petroleum products on rubber).

You'll save time and insure a thorough job if you set up an orderly lubing pattern, and stay with it.

Start with the hood latch, hood rub blocks, hinges and other gimmicks it takes to raise and lower the forward hatch cover. Next, have a look at the accelerator linkage, and the transmission controls.

With these cleaned up, go after the

The right treatment for doors and windows

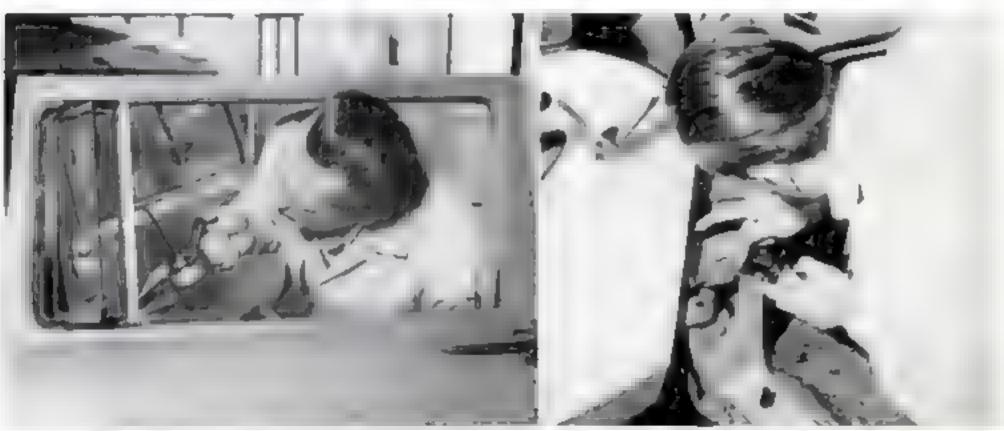

STIFF WINDOW ACTION may be caused by internal troubles that are best left to a body-repair shop. But high friction in the seal-strip grooves at sides is more likely to be the culprit. Oil, worked into the felt, does wonders here.

EASING DOOR ACTION: Check-straps, dovetails and lock tongues call for light greasing, or applications of stainless stick lubricant. Squirt oil deep back into hidden hingo pins, and apply a few drops to all moving lock parts.

door hinges and locks, and the window guides. Dab a bit of grease on the adjustable front-seat tracks, and lube the push-pull rods on the dash controls. Then check the glove-compartment lock. Finally, give the heater and ventilator

pivot points and wires a touch of the squirt can. Easy does it here, or you'll have oil dripping on your new socks come Sunday. You should now have a car on which everything works as smoothly and silently as the door of a bank vault.

Aid for interior controls



HARD-TO-OPERATE DASH CONTROLS respond to a thin coating of grease on push-pull rods.



WORK A LITTLE OIL into the glove-compartment lock. Dab the latch with a touch of grease.



REMOVE SIDE PANELS from adjustable front seat while you're working at floor level. Apply grease to the tracks, oil to the moving parts.

Lubing patters minor friction	n for points	
PART	LUBRICANT	
1 HOOD LATCH (striker)	Light greess	
2 HOOD LATCH (moving parts)	10-W oll	
# HOOD HINGES		
4 HOOD SEAL STRIP	Stamless stick lubricant, or brake fluid	
\$ HOOD RUB BEOCKS		
# FAN BELT (Inner surface)		
7 ACCELERATOR-LINKAGE JOINTS	10-W oil	
4 TRANSMISSION-CONTROL JOINTS		
9 TRUNK-LID HINGES		
18 TRUNK LOCK (moving parts)		
11 TRUNK LOCK (striker)	Light grease	
12 DOOR HINGE PINS		
13 DOOR LOCK (moving parts)	10-W 04l	
14 DOOR LOCK (dovetails)		
18 DOOR LDCK (wedges)	Light grease, or stain eas at ch tubricant	
18 DOOR CHECK-STRAPS		
17 DOOR WEATHERSTRIPPING	Stainless stick lubricant, or brake fluid	
18 WINDOW-GUIDE STRIPS	10-W oil	
19 PUSH-PULL DASH CONTROLS	Light grease, or stamless stock lubricant	
20 GLOVE-COMPARTMENT LATCH		
21 GLOVE-COMPARTMENT LOCK		
22 HEATER AND VENTILATOR CONTROLS (moving parts)	10-W oli	
23 FRONT-SEAT ADJUSTOR (moving parts)		
24 FRONT-SEAT ADJUSTOR (tracks)	Light grease	

Wonderful Start!



Lesson number one: a new set of ACs can save three times their cost in gasoline

First solol Great day for any driver . . . and it's a great day when a new set of AC Hot Tip Spark Plugs goes into your car. Here's why: the long, thus, recessed "Hot Tip" insulator heats faster to burn away carbon, oil and combustion deposits. This exclusive AC anti-fouling action assures efficient fuel combustion—saves as much as one gallon of gasoline in ten. In an average year's driving this would pay for a new set of AC Hot Tip Spark Plugs three times over.

ACs are factory equipment on more new cars than any other make, Install new ACs every 10,000 miles!



ACTION starts with HOT TIP SPARK PLUGS

Watch Wall Disney Studios' ZORRO every week on ABC-TV

Gus Bails Out

With Christmas coming and just enough cash to buy his

By Martin Bunn

A HEAVY December snowstorm was in progress when the call from Cynthia Andrews came to Gus Wilson's Model Garage.

"Mr. Wilson," Cynthia Andrews said, relief in her voice, "thank goodness you

haven't closed for the night."

"What's your trouble?" Gus asked, hoping that he wasn't going to be called out into a storm like this at seven o'clock

in the evening.

"My son George just telephoned me that the car is broken down in the snow. I can't think what might be wrong with it. I used it only yesterday, when I went out into the country to buy a Christmas turkey from a farm."

"Things like that happen," Gus said.

"Maybe I shouldn't have given George permission to use the car," Mrs. Andrews continued, "He's only 17, you know. But it wasn't snowing when he left, and it's only two days to Christmas. George wanted to take his girl friend, Lydia Turner, for a ride, hoping to find out what she would like for a Christmas present."

"Well, Mrs. Andrews," Gus interrupted, "if you'll give me the address I'll

get going."

"Address? I don't know exactly. It's comewhere on North 128th Street. Do

you know where that is?"

"I'll find it," Gus said grimly and hung up, picturing what it would be like now out on 128th Street, which had been newly bulldozed out of weed-ridden lots, at the very edge of the Meadowville housing development.


"Kids can get themselves into the darnedest jams," Gus said to his helper,



George groaned. "Dad will blow sky-high when he hears about this." "Maybe not," Gus said. "Let's get rolling."

a Teen-Ager

girl a gift, the kid was stuck in more ways than one

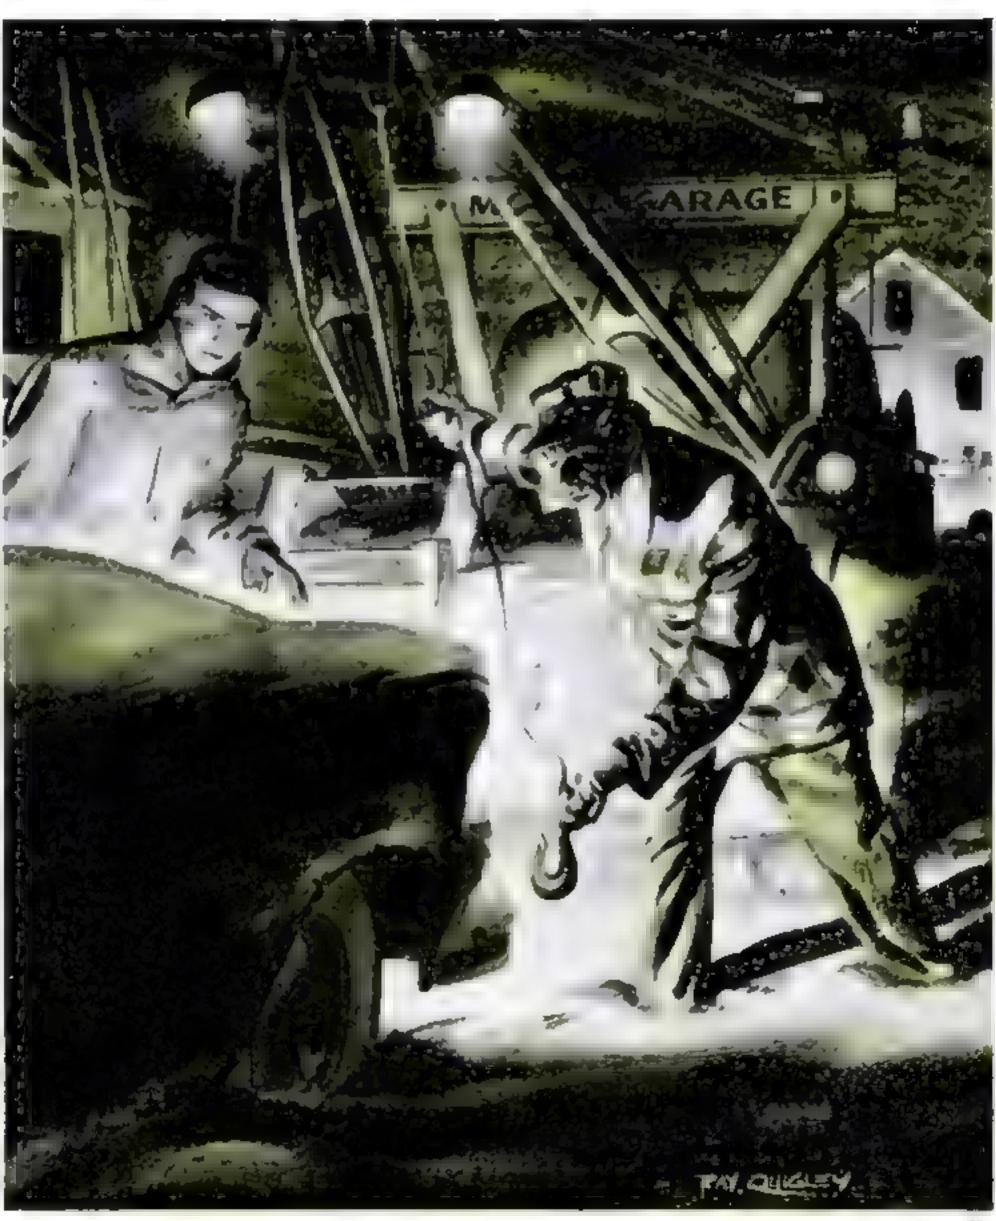

Stan Hicks, as he climbed into his aervice truck. "Sorry, Stan, but I guess you'd better stick around until I get back. I may

need your help."

Gus drove slowly through the swiring snow. As his windshield wipers labored to keep the glass clear, the long rows of new built houses in Meadowville passed in ghostly procession.

S NOW whipped at Gus's face as he stopped to play his spotlight beam on a street-corner sign—120th Street. He counted the streets as he progressed, finally arriving at 128th, then turned north, hoping that he wasn't already north of the stalled car. He proceeded slowly, sweeping his spotlight back and forth across the thinly graveled thoroughfare, along which houses in various stages of construction stood like rows of snow-clad skeletons.

When he finally spotted the Andrews car it was so snow-blown that at first he took it to be a snowdrift. At his approach, lights snapped on and George Andrews leaped out, waving his arms.

Gus wasted no time. He swung the truck around, backed close, got out and

cranked down the winch chain.

"Mr. Wilson!" George exclaimed. "Am

I glad to see you!"

"You don't seem to be in deep enough to be stuck," Gus said. "Couldn't you

pull out?"

"Sure," George said, "if there wasn't something wrong with the car. It won't pull and there's a grating noise in the rear end."

"Sounds like a stripped differential gear or a broken axle," Gus said. "How come you're way out here on a night like this?"

"I was taking Lydia home. We couldn't see the street signs for snow and drove too far out. When we tried to turn around something went wrong." George groaned. "Dad will blow sky-high when he hears about this."

"Maybe not," Gua said. "Let's get rolling." He stared thoughtfully at the car for a moment. "With rear-end trouble, maybe we'd better play it safe and hook on to the back instead of the front." He moved the service truck around to the rear, attached the winch chain and hoisted the rear end up.

"Okay," he told George. "Here we go."

AS SOON as he got into the Model Garage, Gus telephoned the Andrews, John Andrews, George's father, answered.

"I've pulled your car in, John," Gus told him, "There's something wrong, but I haven't had time to trace it yet."

"Whatever it is, fix it," Andrews said irritably. "But mind you, don't charge it to me. Make the boy pay for it. It's his responsibility. I'll call a taxi and come down there and drive the car home myself."

"Better give me an hour or so first,"

Gus said, and hung up.

As he raised the rear end of the car on a floor jack, Gus found himself under the scrutiny of two very worried teenagers.

"What did George's father say?" Lydia

asked. "Was he very angry?"

"Well—not very," Gus said with a smile. "He'll be down later to drive you home."

"Treating me like a kid again," George declared moodily. "I could drive home just as well as he could."

"Sure," said Gus agreeably. "Now let's

see what's wrong."

WITH Stan Hicks easing the car into year, Gus listened underneath. There was a definite grinding noise, which seemed to come from the differential. The wheels ran jerkily. Gus lowered the wheels to the floor and found that both stopped with the car in gear, motor turning But now the grinding noise increased in volume. Gus asked himself a broken axle? Or a stripped ring and pinion?

He jacked the rear end up again. When tests showed that the axles were sound, he settled on the differential gears and pulled the differential housing cover for inspection. What he saw astonished him: The gears were in perfect condition.

"Strange," he mused. "Start the motor, Stan, and turn her over again. Slowly now. That's right. Now put on the brakes."

With the motor turning in gear, the rear wheels locked with the brakes, Gus checked to see if the pinion gear was turning against the ring gear of the differential. It wasn't. The grating noise continued. He ducked under the car, sure now that the grinding sound had been merely telegraphing down the torque tube

to the differential housing. He ran his ear along the torque tube.

"Aha!" he exclaimed. "It's in the uni-

versal joint."

Taking the universal down, Gus saw at last what had happened. The splined yoke, where it fitted over the drive shaft, had split open, causing the splines to jump over each other so that they failed to drive the rear wheels under load.

Gus installed a new universal joint, and the Andrews car was ready to roll.

"I see," Andrews said. "What were you saying he did to the car?"

"This universal joint split open at the splines, but only because there was an old crack in it that had been there so long it had rusted. It might have gone at any time, John—yesterday, for instance, when your wife was out buying that Christmas turkey."

Andrews bent over to examine the broken part. "You're sure of this, Gus?"

"I'm positive, John," Gus said.

Young Andrews was at his heels when Gus went into the office.

"I hope this isn't going to cost too much, Mr. Wilson," he said nervously, "so Dad won't hit the roof when he sees the bill."

"Your father won't see it, George," said Gus. "He said you must pay it."

"He did!" George groaned again. "Gee, Mr. Wilson, I've been socking away part of my allowance for months now, and I've only enough to buy Lydia's Christmas present."

"I'm sorry," Gus said.

"How much money do you have?"

"Ten dollars."

"That," declared Gus, "is just the

amount you owe me."

"Gee," the boy exclaimed, handing Gus some crumpled bills, "now I'm completely broke, and Christmas is only two days off."

Just then the senior Andrews entered the office. "Did you get the car fixed,

Gua?" he asked


"Yes, and George paid the bill."

"Fine," Andrews said. "Well, get in the car, George, and we'll take Lydia home."

"Aren't you interested in knowing what was wrong with your car?" Gus said to the parent's retreating figure.

"Sure," said Andrews, pausing. "What did George manage to break this time? And how much did it cost him?"

GUS picked up the broken universal joint. "It cost him a Christmas present for Lydia. Ten dollars, to be exact—which was all he had."

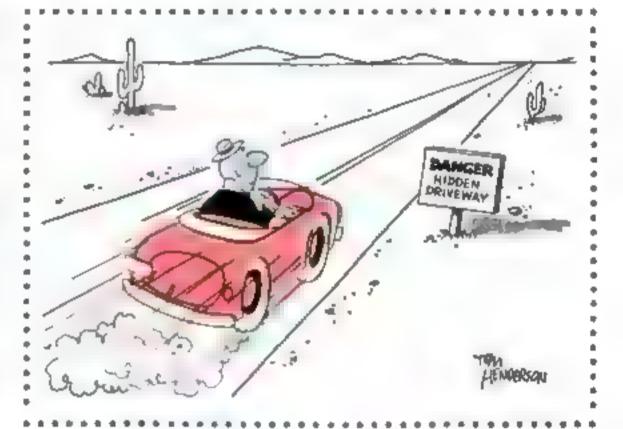

"In that case," Andrews said slowly, "I made the boy pay for something that wasn't his fault at all."

"Looks that way to me."

John Andrews stood silent a moment. "I'll slip the 10 dollars in his wallet after he's asleep tonight. Tomorrow I'll explain about the universal joint."

"That will almost do it, John," Gus said. Then, seeing the new question on Andrews' face, he continued: "The storm is about over. Maybe you could ride in the back seat on the way home. When a boy takes a girl out for a drive, he wants her to feel that he's competent to drive her home again."

Andrews looked intently at Gus. "Say, how come a bachelor like yourself knows

so much about kids?"


"I'm an impartial observer," Gus said, smiling slowly. "If I had a son, I'd probably be tougher on him than you are."

"Maybe so," Andrews said. "But I'll take your advice this time, anyway. And, Gus...a Merry Christmas to you." END NEXT MONTH: Gus smells trouble.

Hints from the Model Garage




A magnetized dipatick will collect tany iron and steel particles in a crankcase. Magnetize it with a quick pulse of current through a temporary coil. With AC you may need to repeat until you catch the current cycle at or near a peak.

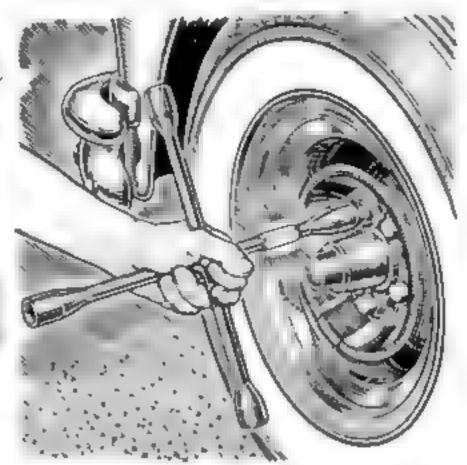


A strip of reflective tape wrapped around one shank of a four-way lug wrench saves fumbling for the right socket when changing a tire. Little disks of the tape stuck on the bolt heads may keep them from being lost if you get a flat at night.





When washing or degreasing an engine, cover the carburetor, coil and distributor with plastic food-saver bags to keep them dry. After the washing, remove the covers and the engine should start easily, or at most after drying only the spark plugs.

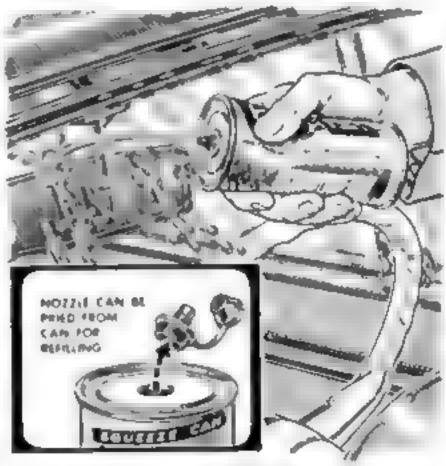


To clear your windshield quickly of slush and muddy road spray raised by the cars ahead of you, squirt some water on the glass while operating the wipers. Store the water in one of the new squeeze cans used for liquid detergent,

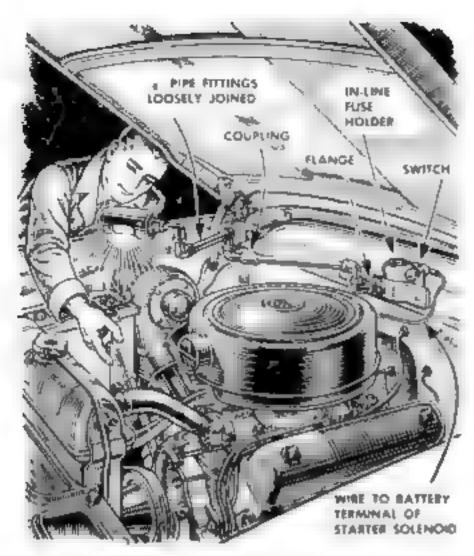

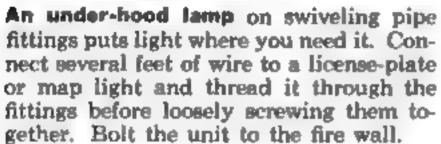


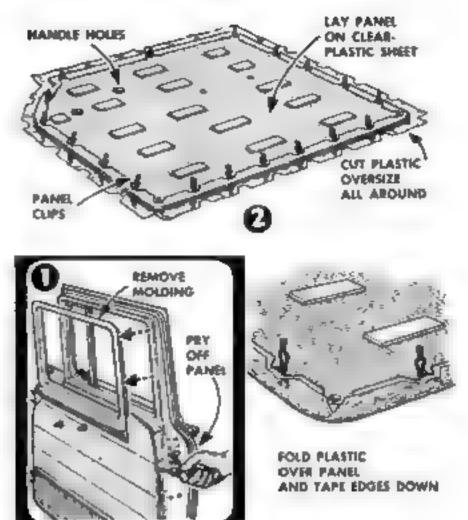

Keep the new look in your car's interior by covering the cowl and door panels with sheets of clear plastic. Pry off the panels and cut the plastic to fit with an inch overlapping all around. Fold the edges over and secure them with tape.

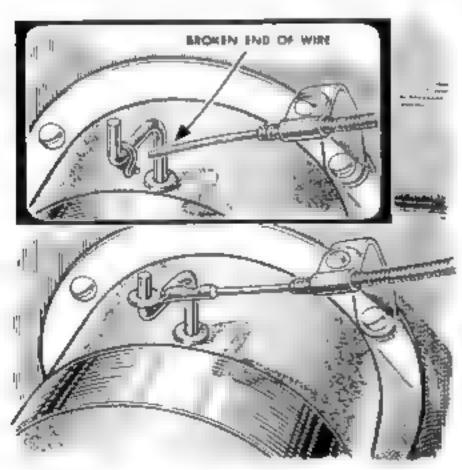

A terminal lug makes a neat repair where the eye of a flexible control cable has broken off. Select a lug with a hole the diameter of the eye it will replace. Tin the end of the control wire or cable, alip on the lug and solder it in place.

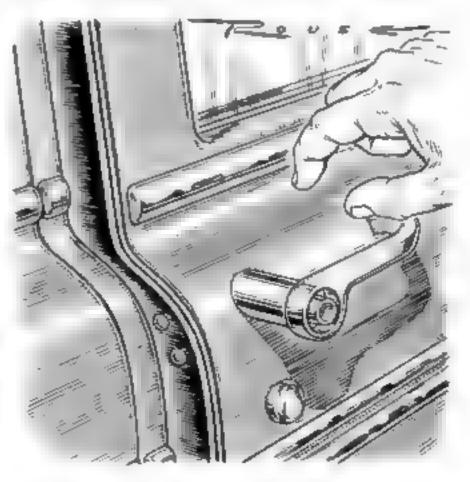


Opening the doors slightly when you put your car in the garage after being out in the rain can add years to the life of the car's body. This hastens drying at critical areas such as door bottoms, which are usually the first to rust.

Short Cuts and Tips FROM PS READERS


Train Layout Rolls Under Bed

No space for a train layout? A perforated hardboard panel, 47" by 72", makes this roll-away roadbed. Mount it on a framework of one-by-fours, put together with corrugated fasteners. A center brace keeps the panel level

The wiring is hidden on the underside of the board and lead wires are brought up through the holes. The entire assembly rolls under the bed on four casters. If there is much equipment in your train layout, add a fifth caster at the center.

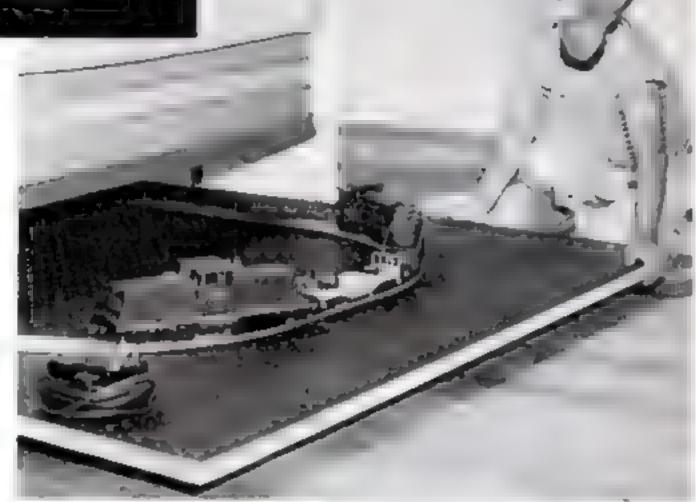

ROLLING STOCK DISAPPEARS under youngster's bed when not in use. It is mounted on pegboard, nailed or screwed to a frame. Wiring for transformer, tracks and outlets passes through holes.

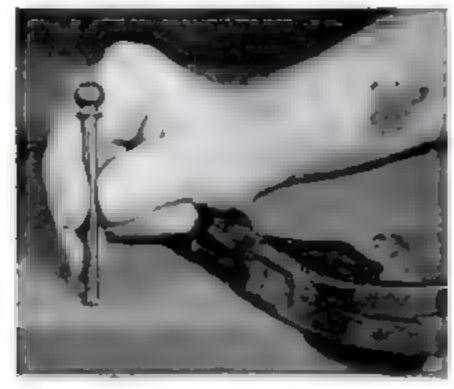

Hinge Pin Sets a Nail

To SINK a common nail flush or a little below the surface without marring the wood, use the pin from an old door hinge as a nail set. The pins are well tempered and the ball top makes a handy striking surface.—I. L. McClay, Pasadena, Calif.




Basket Keeps Hose Off Floor

HUNT up an ordinary bushel basket and you've got a fine container for storing the garden hose over the winter. As much as 100 to 150 feet of hose, depending on its diameter, can be coiled in the basket.


—M. C. Anderson, Arlangton, Va.

98 POPULAR SCIENCE

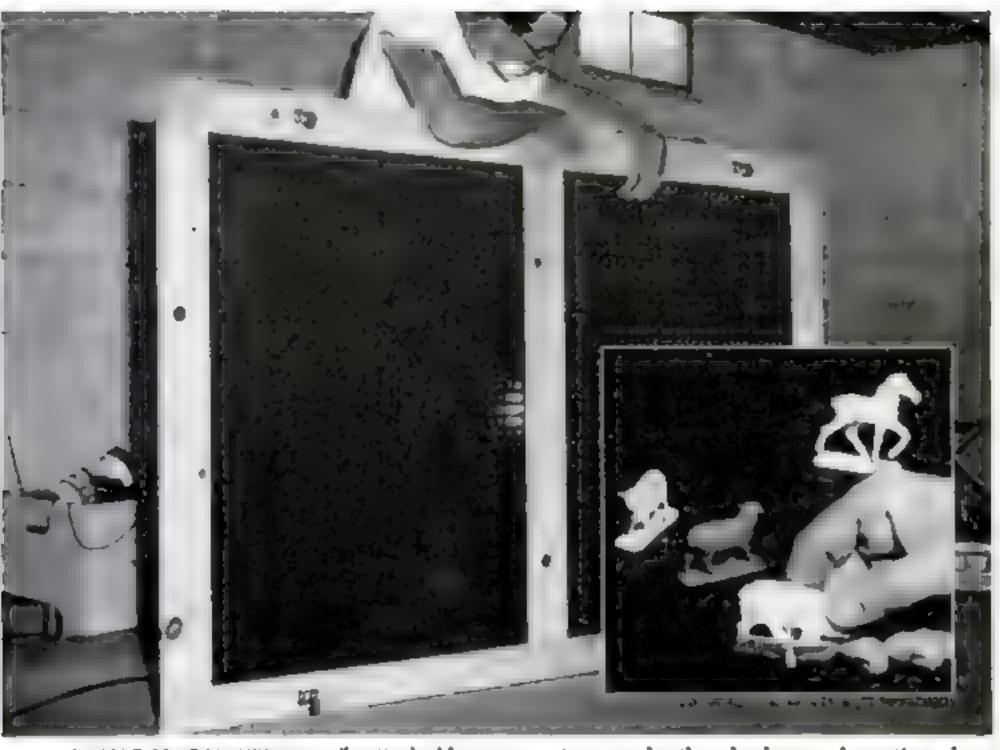

LAYOUT COMPONENTS are easily attached by means of perforations. Tracks will be secured with wire from underside of panel. Toy animals (see inset),

trees and other landscape decorations have 3 16" pegs glued into drilled holes. Pegged down, they'll remain upright under vibration.

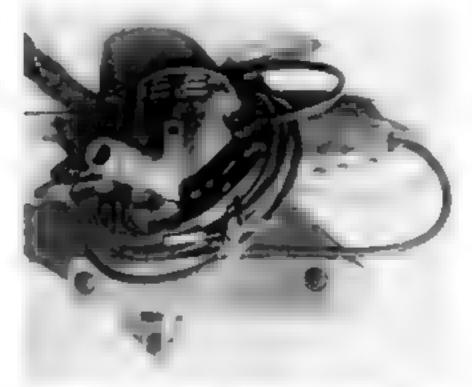

Block Racks Up Electric Drill

Bore a hole through a 2"-by-4" block to take the chuck of your electric drill and you have an excellent storage rack. Bolt the block to a wall or cabinet. The drill can't slip out, yet is easily removed for use.—E. V. Reyner, Townsend, Mont.

Do You Have a Short Cut? Send It in and Win a Prize

HAVE you discovered or developed a money-saving tip or a time-saving short cut in home upkeep or repair? In shop techniques? In hobby activities? Or do you know someone who has?


Popular Science will pay a cash prize for every item accepted, the amount ranging from \$8 for a description alone, to \$12 or more for items with at least one sketch or publishable photo. Rough pencil sketches are acceptable, just so they illustrate the idea clearly. Include negatives with small-size photos. Address your entry to Short Cuts Editor, Popular Science, 353 Fourth Ave., New York 10, N.Y.



Overhead Rack Holds Lumber

To store extra lumber neatly, I utilize the space between the overhead joists in my basement. Several crosspieces secured to the joists support the wood and allow me to slide in boards of different lengths. The lumber is not only out of the way, but selection of stock is easy, too.—Jack Stockwell, Philadelphia.



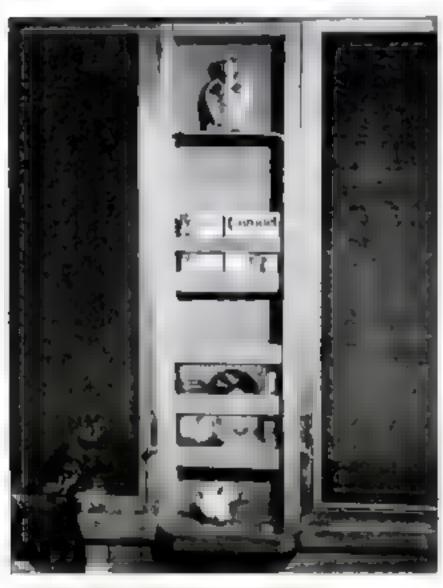

Wall Studs Frame Rack

While enclosing an open porch, one homeowner swiped some of the normally hidden space between study and gained a built-in magazine rack and what-not.

He used the studding as a framework and put in a hardboard backing. The niche holds three shelves, two with front strips to rail in magazines. A plank closing the base of the opening makes a shelf wide enough for a telephone.



Tape Spool Holds Chalk Line

NEED a reel for a chalk line? File off the point of a roofing nail and solder its head to an adhesive-tape spool. To reel in 50' of line in a jiffy, just poke a thumb through the spool hole and turn the crank.—Harold Jackson, Kankakee, Ill.

THE factory advises removing the engine to replace the oil pump on a Pontiac 8 (1949-1954 models). But I have worked out a way to eliminate this step.

After removing the battery and battery seat, I unbolt the exhaust pipe, front motor support and radiator hoses. Then I jack up the engine 6" and, with a smaller jack held borizontal, push the engine 7" to the left. The entire job takes only an hour.—Frank Cingolani, Altadena, Calif.




It's amazing — the things you can build with SHOPSMITH!®




MARNA POWER TOOL COMPARATION


TO TAKE AND SHOW COLOR SLIDES BIG AS LIFE . . .

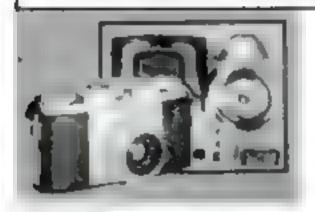

New Kodak Pony IV Camera features simplified exposure settings, zone focusing. Complete with camera, flasholder, case, slide viewer Kodak Pony IV Camera Outfit, \$58.40 (Camera alone, \$39.95)

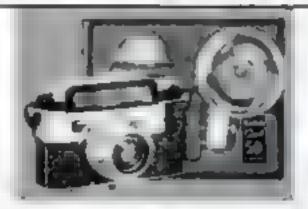

Built-in meter tells exactly how to set camera for just-right exposures! Kodak Signet 50 Camera with tworeflector flasholder, \$82 50 (Kodak Signet 30 Camera, same basic camera without meter, \$55)

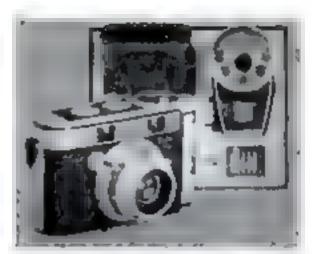


Kodak Signet 40 Camera in luxury gift outfit includes case, Kodak Rotary Flasholder, battery, Kodak Filter Kit. Kodak Signet 40 De-Luxe Outfit, \$96 (Camera and Super-M 40 Flasholder, \$74)


Christmas Gifts from Kodak

When you open a Kodak Camera Outfit first, you can save all the fun of Christmas—and years to come—in pictures


8mm MOVIES-FINEST FAMILY GIFT OF ALL ...

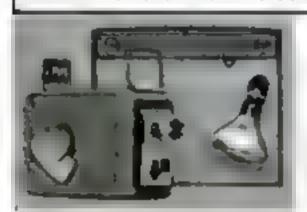


Brownie Movie Camera //2.7 takes color movies with snapshot case. Complete with Brownie 2-Lamp Movie Light and flood lamps for Indoor use. Brownie Movie Camera Kit. f/2.7, \$38.40 (Camera, \$29.95)

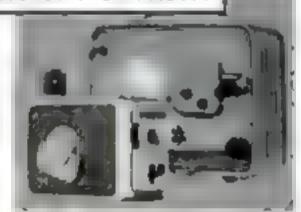


Complete movie outfit—Brownie Movie Camera, //2.3, Brownie 300 Movie Projector shows movies 3 feet wide. Brownie 300 Movie Outfit complete, \$104.70 (Camera, \$39.75. Projector, \$64.95)

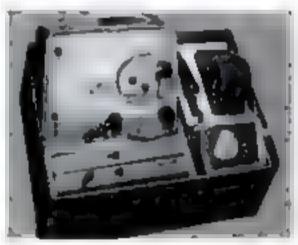


Take and show movies up to 4 /eet wide/Brownic Movie Camera //1.9, case, 4-lamp light bar, Brownie 500 Movie Projector, Brownie 500 Movie Outfit complete, \$144.95 (Camera alone, \$49.75)

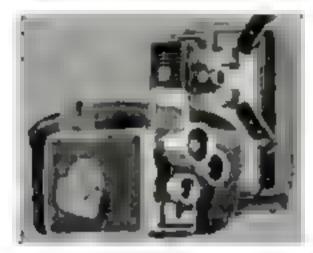

Brownie Movie Camera, Turret f/1 9 takes normal, wide-angle, telephoto movies, Cine-Kodak Show-time 8 Projector shows 8mm movies extra bright. Kodak Super 8 Movie Outfit, \$214 (Camera, \$84.75)

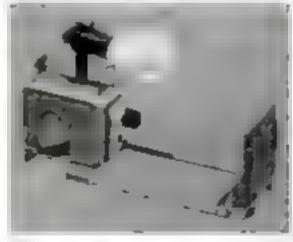


Titles and close-ups are easy with this titler for Brownie Movie Cameras. Includes camera platform, close-up lens, light bar, easel, title cards, "special effect" masks. Brownie Movie Titler Outfit, \$15.95

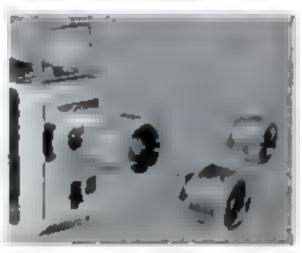


Takepanoramic wide-angle or close-up telephoto views with your single-lens Brownie Movie Camera. Converters slip over regular lens. Kodak Wide-Angle and Telephoto Converters, \$18.50 each.


EASTMAN KODAK COMPANY, Rochester 4, N.Y.

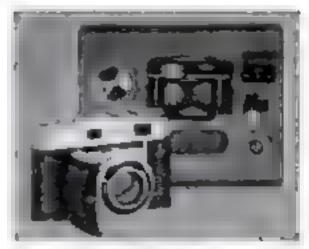

Kodak Retina Camera outfits include telephoto and wide-angle lens components, case, carry-all bag. Kodak Retina IIIC Camera Outfit, \$394 (Camera, \$175). Kodak Retina IIC Outfit, \$351 (Camera, \$132)

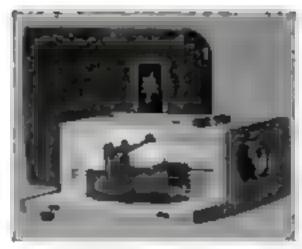

Kodak 300 Projector is ultra-portable, shows color slides big and bright. Quiet; cool; has finger-tip controls. Kodak 300 Projector with Readymane Changer, \$64 50 (with Magazine Changer, \$74.50)

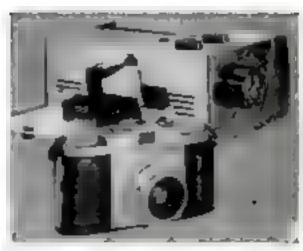


Complete color-slide outfit. Includes Kodak Pony IV Camera, Kodak 300 Projector. Kodak Pony Color-Slide Outfit, \$104.50 (Kodak Signet 40 Color-Slide Outfit with same projector, \$138.50)


say

Open me first!


FOR 'ROUND-THE-CLOCK SNAPS IN BLACK-AND-WHITE OR COLOR ...

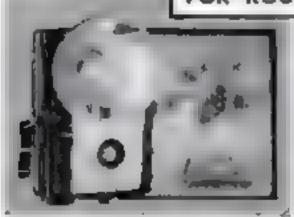


Brownie Starflash Camera takes color slides, black-and-white and color anapa. Built-in flasholder. Complete with bulbs, batteries, film. Brownie Starflash Outfit, \$9.95 (Camera alone, \$8.95)

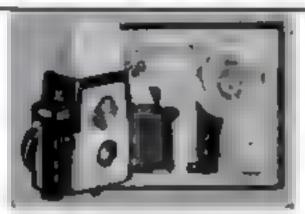


Browne Starflex Camera "previews" your shot, takes color slides and anapabots. Complete with camera, flasholder, batteries, film, Brownie Starflex Outfit, \$16.50 (Camera alone, \$10.75)

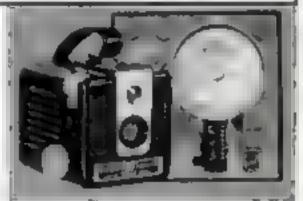


World's most popular snapshot camera in a gift outfit complete with Brownie Hawkeye Camera, flasholder, batteries, hulbs, film, Brownie Hawkeye Flash Outfit, \$15.25 (Camera alone, \$7.95)

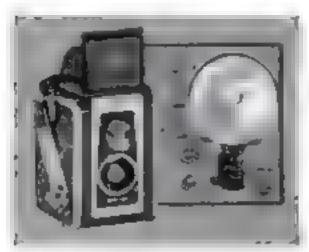

Preview-finder of Kodak Duaflex IV Camera shows picture big' Complete with camera, flasholder, batteries, bulbe, film. Kodak Duaflex IV Flash Outfit, \$25-25 (De-Luxe Flash Outfit, \$38.75)

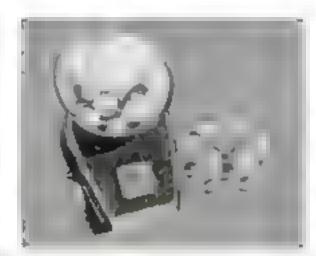

New Kodak Rotary Finsholder permits you to shoot aix flash bulbs without reloading. Two models to fit most cameras Kodak Rotary Flasholders, from \$10.95 Batteries not included.)

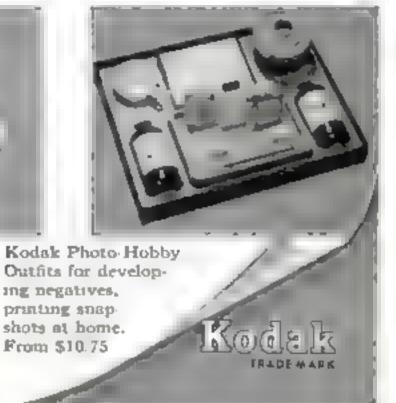

Prices are list, include Federal Tax wherever applicable, and are subject to change without notice

Short Cuts and Tips

Magnifier Is Worn In Eyeglasses

Hobby is soften want to use a jeweler's magnifying glass, but they quickly find that it takes a real knack to hold it in position at the eye. One easy way is to knock out a lens in a discarded pair of eyeglasses, and insert the loupe. If it's a loose fit, tape it to the frame with electrican's tape.

—R. C. Philipp, Gardon, New South If alex, N. Z.






Utility Trays? Try Foil Pans

HAVE your wife save the little foil pans that hold pies, frozen macaroni and other foods. They are perfect for mixing glue, cleaning paintbrushes and countless other jobs in the shop. If you don't buy foods packed this way, the disposable pans can usually be purchased by the package, too.

—R. B. Stearns, Hialeah, Fla.

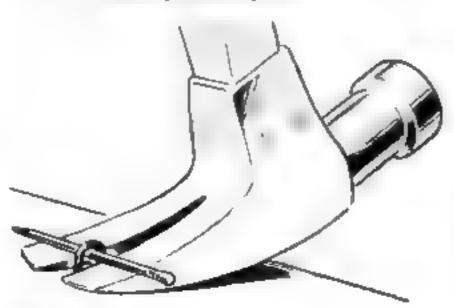

204 POPULAR SCIENCE



Make Your Own Screw Anchors

You can make your own screw anchors for masonry from toothpaste tubes. Cut a strip of the tubing and roll it around a nail to make a plug that fits the stardrilled hole. When a wood screw is turned tight in the soft, pliable metal, you have a fastener that is adequate for most purposes.—Michael Liggett, Muncie, Ind.

Hold-Tight Staple Loses its Grip

A STAPLE will pull out easily without bending if you tap a nail through it and then lift the nail with the claws of a hammer.—M. Scott, Minneapolis.

WHEN you hang plywood cabinet doors, prop them open for a week to 10 days so both sides dry at the same room temperature. This will reduce warping and twisting.—Henry Josephs, Gardenville, Pa.



YOU CAN BE AN IMPORTANT MAN WITH A GUARANTEED FUTURE...IN THE U.S. AIR FORCE

More than just a technician, the Air Force specialist is a man of responsibility and importance. He is the one the Air Force depends on to maintain and operate its increasingly complex equipment. But with this responsibility, he also knows a great sense of pride—and a guaranteed future, both professionally and economically As a technician, you, too, can have this satisfaction and assurance—in the U.S. Air Force. See your Air Force Recruiter, or mail the coupon.

THE FUTURE BELONGS TO THE AIRMAN



MASTE ON POST CARD AND MAIL TO	MASTE O	I POST	CARD A	IND	MAIL	TQ:
--------------------------------	---------	--------	--------	-----	------	-----

Plones send me more information on the Air Force Prior Service Program

Name

4-1-1-12

(Cy

Zoue.

_State___

Ap




Wire Mesh Lets Boots Dry Fast

To DRY fishing boots or waders easily and thoroughly, insert tubes of wire screening. The rolled screening keeps the boots open at the top and the mesh openings let air circulate to speed up drying.

—John Krill, North Lima, Ohio

►►► WHEN the screw holding a washer in a faucet works loose, it sometimes lodges deep inside the faucet. One simple way to remove it is to flush it to the surface. Just turn on the water at the main for a moment after removing the faucet stem. Put a cloth around the faucet opening to keep water from running over the sink edge.—A. L. Levitt, Cambria Heights, N.Y.



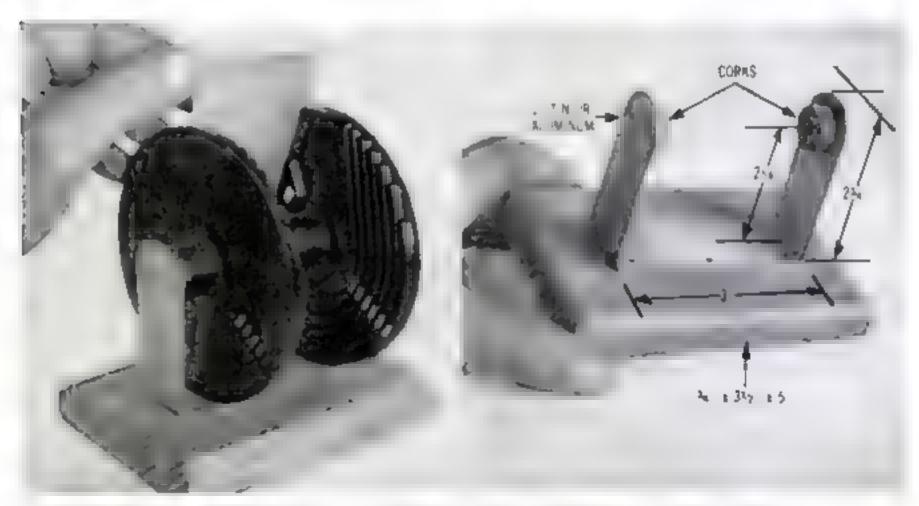

Cork Wedges Hold Reel to Speed Up Loading of Cut Film

I MADE myself a simple rack for holding a cut-film reel for faster and easier loading in the dark. It's just a strip of metal 1" wide bent into a U and tacked to a wooden base. Two corks of \%" diameter, tapered for a push fit in the center post of the reel, are cemented to the upright arms.

When the reel is slipped into the holder, it is gripped firmly by the corks and the slots are always face up so that you don't have to grope around to find them.

—A. P. Zanelli, Tampa, Fla.

PPPBEFORE using a ladder, give it a safety check by laying it on the ground and walking its full length, stepping on each rung. Any rungs that show weakness or turn in their sockets should be replaced at once.—John A. Coombs, Philadelphia.

'58's real eye-opener is CHEVY!



And that's a fact. You never saw so much sharp engineering, so many advanced ideas, such stunning changes packed into one year's progress. You'll spend hours studying this one and never run out of surprises. For '58, Chevy's new from the paint on in—and that means body, suspension, chassis, engines... the works! Sure, they're lovely to look at. But come on down and get the real eye-opener, the inside story! ... Chevrolet Division of General Motors, Detroit 2, Michigan,

- LEVEL AIR RIDE— 100% air springs, 5 front and rear.*
- TURBO-THRUST V8
 with combustion
 chambers in the block!*
- NEW BODY-FRAME design has double-wall cowl for added rigidity.
- NEW FRAME—
 has new X-design for extra lowness

- 3 CARBURETORS
 on Super Turbo-Thrust
 V8 . . . and 280 h p.!*
- CLOSE-RATIO Syn Chro-Mash trans Missions on all V8's. **
- 4 COIL SPRINGS with advanced Four-Link rear suspension.
- top efficiency, instant sections.

- NEW WHEELBASE—*
 2½ inches longer for **
 extra room and comfort.
 - NEW BODIES—9 inches longer, up to 2½ inches lower.
- NEW IMPALA **


 fuxury models rivat
 the costliest cars
- CHEVROLET

- *Optional at extra cost. **Except with Overdrive.
- DUAL HEADLAMPS ?
 for better light pattern,
 longer low beam.
- 348 CUBIC-INCH Turbo-Thrust V8's with "gable-roofed" pistons.
- ## TURBOGLIDE, the super-smooth, tripleturbing transmission. ■



"Plumber's Friend" Does Wash

IF YOUR wife refuses to throw oily rags or greasy work clothes in the washing machine, pretreat them to keep the peace. Put them in a bucket or tub with detergent, add hot water and agitate well with a plumber's plunger. When the water is poured off and the items are rinsed, they won't ruin everything they touch.—Ben C. Dickinson, Warner Robins, Ga.

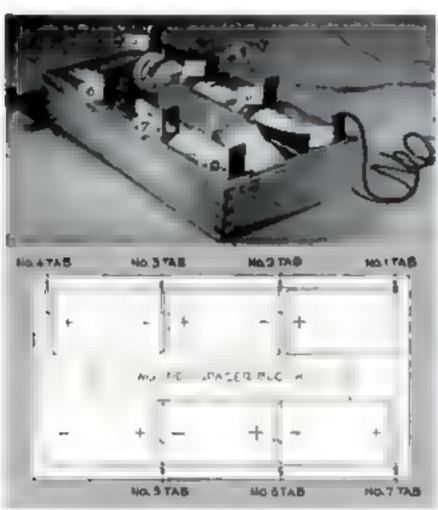

Battery Pack Varies Voltage

This battery pack will save time for hobbyists who work with transistors and other low-voltage equipment. To make it, box in aix D-size 1½-volt flashlight batteries.

Arrange the batteries to form a six-step series hookup, and insert thin metal tabs between top and bottom of each. At one end of the box, a long metal strip connects the top of one battery to the bottom of the one in the other row

The No. 1 tab serves as a common negative for six positive taps providing from 1½ to 9 volts. By rearranging the batteries you can make parallel hookups.—Carlton G. Bucher, White Plans, N. Y.







Travel Kit Holds Car Tools

ONE of those inexpensive duffel bags with a zipper opening is handy for keeping car tools together. If not too full, it can be folded and bent to fit into an out-of-the-way corner of the luggage compartment. The soft fabric helps prevent rattling, too.—O. A. Nelson, Seattle.

PRECENTLY while working on a wood project that called for use of fine sand-paper, I found that all I had on hand was a coarse grade. Rather than postpone the job, I dulled the abrasive on the coarse paper by holding it against a grinding wheel. The ground-down paper worked fine.—John A. Comstock, Wellsborg, Pa.

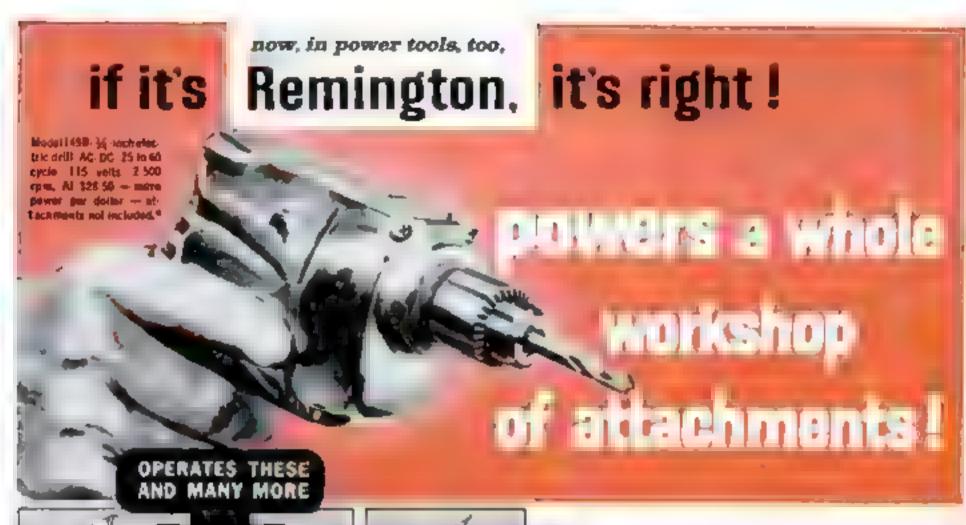









SANDER

RECIPROCATING SAV








METAL NIBBLER

HEDGE TRIMMER



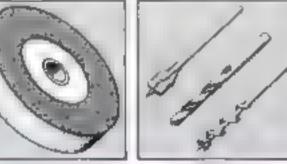



GRINDING WHEEL

BRILL

SLITTING SAW

MALL TOOL COMPANY, Division of Remington Arms Company, Inc., Bridgeport 2, Co. In Camada : Mail Tool, Ltd., 36 Queen Elembuth Bled., Turmets , Oct.

Here's an electric drill with power to spare! Now you can assemble a complete, low-cost home workshop around just one powerful tool-the Remington 149B drill by Mall, It's precision-built to handle most any job ... to give a lifetime of rugged service. Fits planer, sander, saw and dozens of other attachments. Does many jobs out of the workshop, too, from hedge trimming to car polishing.

*Specifications and recommended price subject to change without notice.

SEND FOR FREE. 16-PAGE CATALOG

showing every type of electric hand tool. Tells what each tool will do. Gives prices and specifications. No cost, no obligation. Send coupon today.



Mail this coupon today!

MALL TOOL COMPANY		
Division of Humington Arms	Company,	line
Bridgeport 2, Consectiont		


Please send without obligation FREE, illustrated catalog on electric tools.


NAME		
ADDRESS.		
CITY	ZONE_	STATE



Tap of Toe Runs Air Compressor

WITH a box and switch that can be purchased at any electrical-supply house, I added a foot switch to my air compressor for more convenient, both-hands-free operation. So far as I know, no low-cost air compressor on the market boasts this simple improvement.—Joseph S. Restivo, Rumson, N. J.

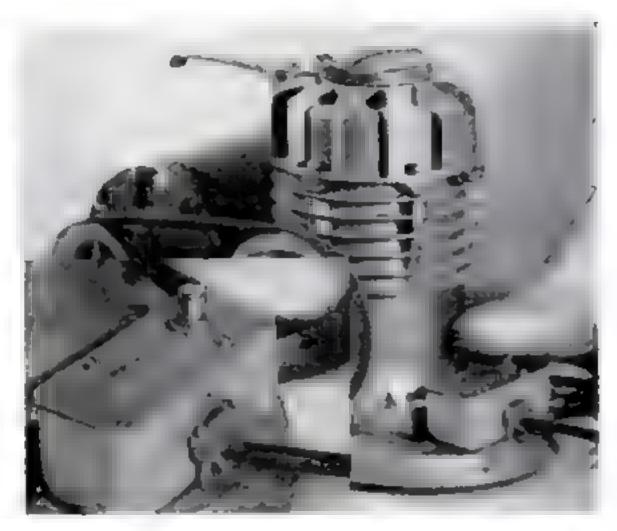

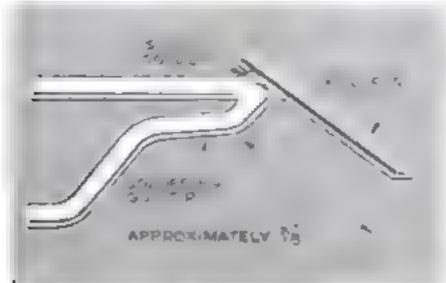


Tip Helps Fine Soldering

To use a soldering gun for printed radio circuits or other fine or hard-to-reach work, silver-solder a 1" extension to an extra tip. I used a piece of flush-valve float rod, but the shank portion of an old tip will do. Either will give the proper heat.—H. E. Puro, Detroit.



Platform Lifts Wet Pails


BASEMENT floors in a laundry-utility room can be kept drier and cleaner if mop pails are parked on a moisture-resistant platform. I made this one by nailing 1/4" tempered hardboard with slightly beveled edges to a framework of scrap lumber.—Lawrence H. Selwyn, Chicago.



FILE cross slots on the flat face of a nut and the four corner spurs will penetrate and grip wood when the mating bolt is turned tight. This eliminates the need for a second wrench in tightening a nut.

—R. J. DeCristoforo, Los Altos Hills, Calif.



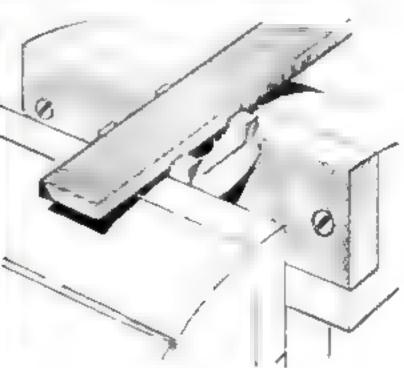



Why settle for part-time protection?

 Hastings Oil Filter Cartridges keep oil clean all the time—from filter change to filter change.* The reason is Densite.

Densite—an amazing new type of filtering material—is made of millions of selected cotton fibres, pressure packed so oil must flow through countless tiny openings, pass many surfaces of fibres. The most microscopic abrasives cling to these fibres—and stay there!

Next filter change, ask for Hastings . . . ami get full-time protection!

*When replaced as normally recommended. This fact proved by tests conducted in accordance with U. S. Bureau of Standards procedure.



HASTINGS MANUFACTURING COMPANY - HASTINGS, MICHIGAN Also makers of Piston Rings, Casite, Wear Reducer, Spark Plugs




Pins Make Car Doors Safe for Youngsters

Youngsters riding in the back of a car can be a worry to a driver because of the hazard of opening doors. To give us peace of mind, my husband worked out a simple but ingenious locking arrangement.


He drilled a hole through each center post and into the door facings a few inches below the latch to take a large bolt. When these lock pins are slipped

into place, it is impossible to open a rear door until the front door is opened and the bolt is lifted out.

By merely reversing the bolt on the right of the car, we can lock the front

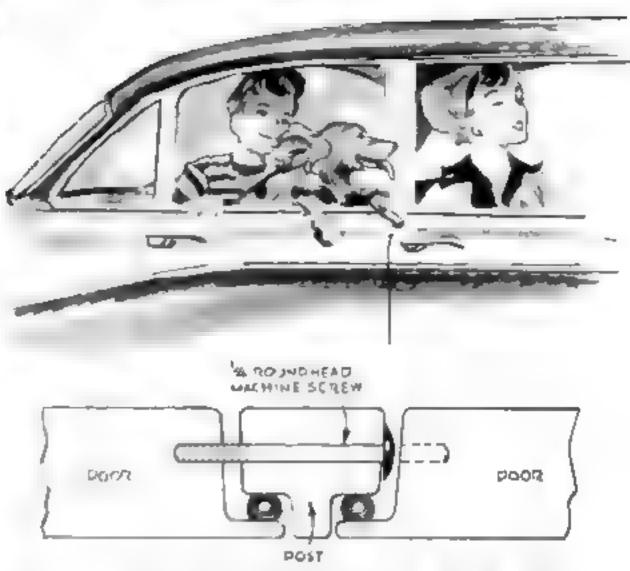

door if our young son sits with the driver. The bolts can be removed when not needed and the best part of the arrangement is that the car's appearance is not defaced.—Jane Reid, Los Angeles.

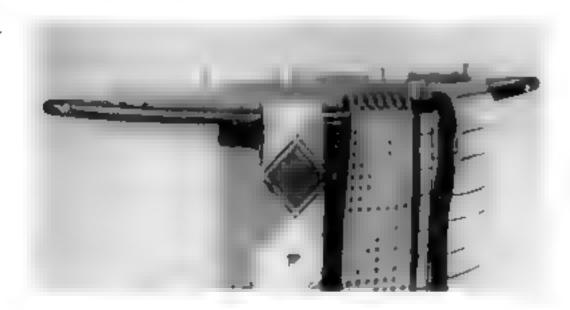

Quickie Tie Rack Made from Hanger

Saw off the ends of a wooden coat hanger so that they can be screwed flush to a wall or door, and you have a good tie rack. Remove the wire hook, plug the hole with wood filler, enamel the rack to harmonize with its background, and stud with push-pin dividers.—Frank Shore, NYC.

Ball Lifts Out Broken Light Bulb



SHATTERED glass makes it dangerous to remove a broken lamp bulb from its socket with your fingers, and it's difficult to turn the shell with a pair of pliers. A better tool for the job is a small rubber ball. Press it up against the bulb and

you can twist out the remains safely and easily.—M/Sgt. J. R. Wood, APO, NYC.

Litter Basket Hangs on Dowels

A FABRIC bag that matches the drapes or upholstery makes an unusual waste-basket for a bedroom or den. Three pockets, sewed into a hem at the top, slip over 3/4" dowels set in a 2"-thick triangular base. When filled, the bag is lifted off



the stand, dumped and rehung on the dowels.—R. P. Loeicen, Anniston, Ala.

How to get your money's worth from the next battery you buy

Although most batteries look alike, there is a vast difference in the way they perform. So, it will pay you to choose your next battery carefully rather than just "buy a battery." There are good reasons why it will pay you to choose an Exide.



STARTING POWER . . . Full-size plates and a more powerful active material than commonly used assure you more power than needed for starting—even in the dead of winter. This leaves a big reserve for electrical accessories.

VITAL FRESHNESS . . . Dry Charged (filled by your dealer) or Wet (filled at the factory) your Exide is always alive with long-lasting power.

LONG LIFE... Your Exide will give you more months and miles of trouble-free service because patented grid alloys are used in the plates. They combat over-charging—major cause of battery failure.

GUARANTEED SERVICE . . . You are protected by a nation-wide guarantee ranging from 18 months to 4 years.

ECONOMY . . . You can buy an Exide, produced by the company that has pioneered so many battery developments in the past 50 years, for no more than the cost of an ordinary battery. You'll be sure to get your money's worth.



FREE! This 32-page manual tells all about batteries. How to test, install, recharge, etc. Write to Dept. 36, Exide Automotive Division, P.O. Box 6266, Cleveland, Ohio.



Lunch-Box File Holds Bulky Papers

When household papers overflowed a small file-card box, I moved them into an unused lunch box. Now I can store dozens of receipts, notices and other papers in this dustproof file. It's long enough to hold legal-sized envelopes and has a handle.


—H. W. Swope, Danville, Pa.



AN OLD screwdriver makes a handy tool for drilling through concrete, brick or thin wood. I drill wood by pushing the screwdriver blade into it with a twisting motion. On concrete and brick I start my "drill" by rapping the handle with a hammer.—Charles Carroll, Marion, Ohio.

BEFORE painting over a screw that you may want to remove later, back it off a few turns and let the paint dry. Then retighten. This way paint won't seal the screwhead in tight, or be marred if you decide to take the screw out later.—


Kenneth F. LeMere, Springfield, Mass.

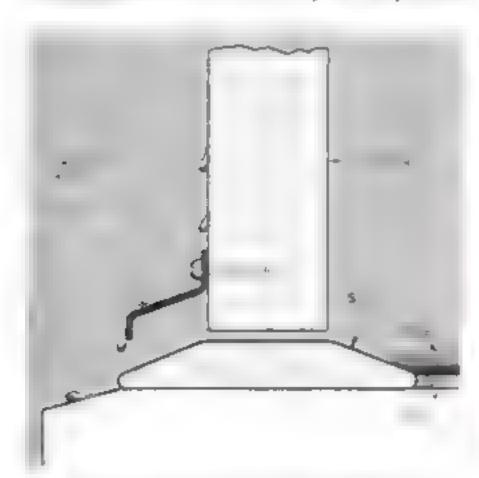

Deflector Keeps Rain Outside

RAIN water can't run under my front door and onto the rug since I added a deflector. Bent from a strip of aluminum, the deflector is screwed to the bottom outside edge of the door with aluminum screws. It cuts down on drafts, too.—

A. Di Stasi, Trenton, N. J.

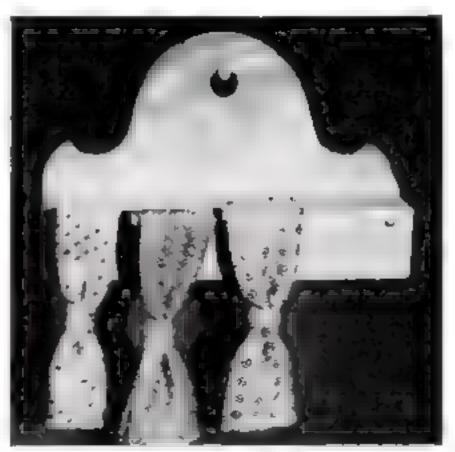

Clip-On Rack Holds Bow Ties

ALL the tie racks I've seen ignore readytied bow ties, so I made my own of $\frac{1}{4}$ " plywood. I nailed a $\frac{1}{2}$ "-wide strip of plywood across a backboard and faced this with a 1"-wide strip of aluminum. The tie clips grip the metal overhang at the bottom.—A. R. Tanner, Cold Spring, N. Y.



The Dangerous Job of Moving Oil [Continued from page 104]

above 60°, now averaged 67°.) Despite the flying spray and occasional water on deck, men were painting everywhere in the endless fight against rust.

On Sunday, as the ship neared Lands End, the approach and English Channel charts were brought out. The chief mate drew a black circle around a seven-fathom spot that could rip the ship's bottom. At 1530 she detoured around it, At 1650, the ship changed course again to pass the first of a group of fishing trawlers. Ocean traffic was getting heavy. Before leaving the bridge, Meseck took radio direction-finder bearings. His plot showed the ship right on her track.

Before turning in, though, the captain left a call for 0300. He wanted to be on the bridge for the first visual landfall

The loom of Bishop's Rock light was sighted at 0348; at 0426 the lighthouse itself was visible. The trip was over.

As the ship steamed through the English Channel, working parties were laying out the heavy mooring lines. In midafternoon, the captain raised the pilot cutter on the radiophone. "Tanker World


Beauty calling," he said. "Arrive at 1900." "You will not be docking tonight; you

"You will not be docking tonight; you will anchor in Cowes Roads," the cutter answered.

Coming up to the World War II flak tower where the pilot boat waits, the captain tried different maneuvers to see how the ship handled under a full load. Her weight was nearly 60,000 long tons, or roughly the same as a bumper-to-bumper line of ordinary passenger cars more than 100 miles long. He stopped the engines. After drifting 3½ miles, the Beauty was still making half speed. "She goes farther than I thought," he said wryly.

There was more to occupy the captain's mind when the pilot came aboard. He explained that the Beauty was too big to take upriver—Fawley is on the Test River—in the dark

Next day, Tuesday, there was further trouble over size. Alongside the oil dock there was a shoel spot that would come right under the Beauty's stern. Because of her draft, she'd be aground at low water, although she could get in all right at high tide. To complicate matters, the

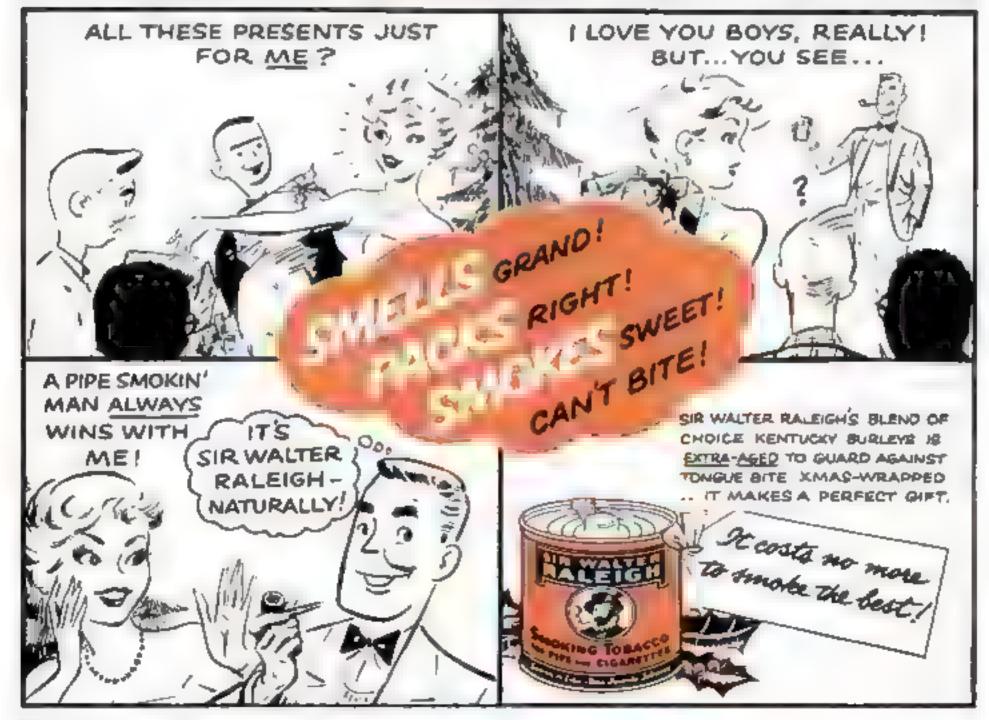



It's definitely not made for you if you're just looking for "basic transportation"...not this jewel in Buckskin Beige and Gold...the fabulous new FURY that actually outclasses even the FURY of other years.

That's hard to do! But this gem does it! Introducing the new GOLDEN COMMANDO V-8 engine *... 350 cubic inch, 10 to 1 compression, dual quads—a mill giving the greatest performance in Plymouth history.


+Optional, at low extra cost.

With famous Torsion-Aire Ride, featuring torsion bar front suspension, this new FURY really hugs the pavement, corners flat and stops level — without nose-dive. You don't just drive a FURY... you virtually wear it!

Don't wait until a new FURY pulls alongside at a stop light to look one over...let your Plymouth dealer show you the terrific things that happen when the builders of great motor cars set out to surpass themselves—and succeed!



Star of the Forward Look ... - Jury by Plymouth

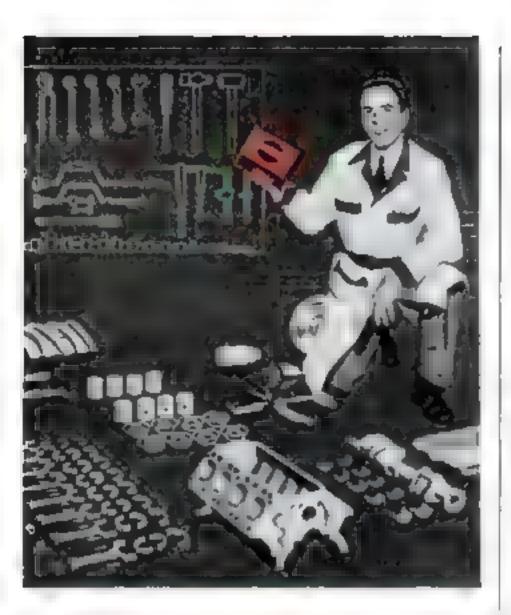

It all adds up

to one thing:

Fine bearings mean fine performancet

The skilled mechanic puts a lot of good work into reconditioning an engine . . . and he protects his work by installing Federal-Mogul main, connecting rod and camshaft bearings. Why? Because he knows the bearings are the heart of engine performance and the best replacement bearings cost no more. Most of the 765,000 mechanics in the U.S. and Canada prefer Federal-Mogul bearings—they know they assure fine performance. Ask your mechanici

FEDERAL-MOGUL SERVICE

Division of

Federal-Mogul-Bower Searings, Inc.

Machanics Know . . .

that the black and red Federal-Mogul box identifies the service bearing line as modern as today's engines.

RESEARCH . DESIGN METALLURGY . PRECISION MANUFACTURING . SERVICE



The Dangerous Job of Moving Oil

refinery wanted only the premium crude, stored in forward tanks. Unloading it would not raise the tanker's stern.

To keep her off the bottom, the refinery would have to take 6,000 tons of the other oil—which was all they had room for. It would be a close race to lighten the Beauty before the ebbing tide dropped her on the bottom.

Wednesday afternoon, as the tide was rising, the World Beauty headed upstream. At 1750 she was moored. There was one hour to flood tide—6½ hours to low water.


Within 15 minutes two hoses were aboard. Within half an hour, four were hooked up. At 1855, Meseck yelled down to the engine room to start the pumps.

Things went wrong. The pressure gauges on one line read too high. Poomps discovered a supposedly open valve that was half shut. It took two oversize wrenches and two strong backs to fix it. The gauges on another line ceased functioning, and finally, the reduction gears on pump No. 4 overheated so the pump had to be shut down. That left only three pumps in the race.

All night long the pumps whirred and the men with steel ullage tapes walked from tank to tank. At 0010, a little before low water, Meseck figured he had enough of the ordinary crude off the ship to keep her clear of the shoal. At 0401 he stopped the main pumps. Now the ship was racing not the tide but another ship. Tugs had been ordered originally for 0600, but the Queen Elizabeth was sailing from Southampton that morning, too. The tugs said they'd have to leave the Beauty for the Queen at 0550.

At 0531 the last man from the refinery jumped from the tanker's deck two feet to the pier. Then, in the gray light of a rainy English morning, the lines were snaked in and the tugs pulled the World Beauty away from the dock. She blew her whistle as she headed downstream, riding high enough now to enter Rotterdam to leave the rest of her crude oil. From there, she was bound for the Persian Gulf for more oil.

Her first year would take her ninetenths of the way around the globe, traversing the world's major oceans, shuttling tirelessly from oil field to civilization and back.

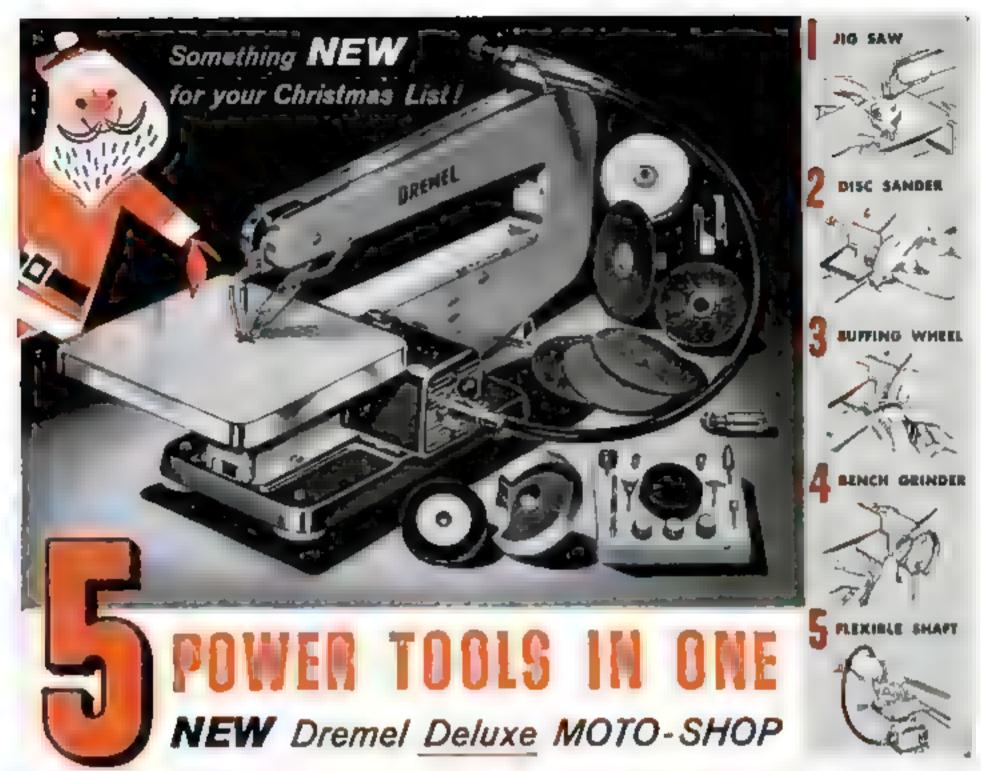

COMPLETE POWER WORKSHOP IN ONE COMPACT, PORTABLE UNIT

The amazing new Dremet Moto-Shop is the most versatile multi-purpose tool ever invented. Has 1 001 home and shop uses. Basically, it's a 15" Jig Saw with a unique power take-off to which you simply connect other attachments.

It then converte to a disc sunder, bench grinder, buffing wheel, and a flexible-shaft muchine all powered by a ball-bearing retary motor

And this professional quality, portable power shop can be set up practically anywhere—basement workshop kitchen counter, or eard table. Weight only 12 lbs, As a Jig Saw it will cut 1% wood, IS gauge copper, 1/16 steel—all with

the same blade. Footproof blade guard makes it absolutely safe—even for children. Handles everything from bird-houses to full-size furniture.

The flexible-shaft is a complete machine shop in itself Use it for sharpening, grinding, polishing, carving, Collet capacity 1/64" to %"

Moto-Shop is the perfect "ALL FAMILY" workshop—safe for even mom and the children. Helps build a close father-son relationship.

Model 87 Mote-Shop. Includes Jig Saw with disc sander attechment only. Other attachments can be added later \$33.00

Deinzo Model 57 Meto-Shep with all attachments shown.

. . \$49.95

Price of attachments only if purchased separately . \$49.05



Dremel Straight-Line Action Sanders sand with the grain or the wood Quickly produce a velvet smooth finish, free from cross-grain scratches and orbital swirl marks. Save a lot of cibow gresse, too. Three popular models to choose from—\$14.85 to \$37.50

MOTO-TOOL

The Pecket Size Machine Shap

Most versatile and useful tool you can own Grinds drills polishes carves sharpens engraves Handles easily as a pent. Saves time ciminates tedious hand work Produces 27 000 RPM ideal for traffsmen hobbyists, model builders, home owners etc. Four prices to choose from \$12.85 to \$27.30



DREMEL MOTO-SAW

The Famous Electric Scroll Saw



Cuts the most intricate designs like magic Saws wood up to 2, 2 also plantics. Inght metals, floor and wall tile Saws to the center of a 19 circle. 7 200 cutting strokes per minute Unique FOUR-WAY BLADE HOLDER permits cutting in any direction. \$6.55

Bug your Dremel Gift at Your Nearby Power-Tool Bester Today!

WRITE FOR FREE CATALIES

Quality Power Tools since 1914

DREMEL MFG. CO., Dept. 127M, Racine, Wisconsin






For that man or boy who loves fine tools — what better gift than accurate, dependable STARRETT tools? Handyman or mechanic, hobbyist or skilled craftsman, there's a STARRETT tool that's right for him and right for your budget, too,




Starrett No. 438 0-1" Micrometer

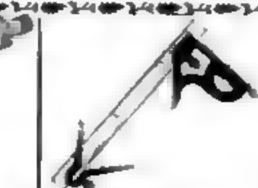


Starrett No. 11 12" Combination Square



Starrett No. 902 Kit of Measuring Tools



Starrett No. 825 Toolmaker's Hammer with Magnifying Glass



Starrett No. 1010 Draf Indicator Pocket Gage



Starrett No. 425 Pocket Slide Caliper

3000 GIFF IDEAS, Ask your Starrett du	-
iributor to show you these and man	¥
more gift-worthy Starrett items. O	Т
write for the Starrett No. 27 Catalog	
Use the coupon,	

ていかできる でんりま てんりま しんりんしょ

TARRETT TOOLS are curried by landing believeled Supply Bistelbuters



THE L. S. STARRETT COMPANY Dept. PS, Athol, Moss., U.S.A.

Please send my free copy of the big, new Starrett No. 27 Crising describing the many Starrett Tools recommended for Christman and Gifts the year-round.

Name	 *****
Address	
City	 Sinte

The '58 Ford—How It Stacks Up [Continued from page 19]

Chevy's three-carburetor combination works with deceptive simplicity. The fore and aft carburetors cut in only at a considerable throttle opening—50 degrees, as the engineers describe it. Most of the time, even in the car's cruising ranges, the engine uses only the single center carburetor.

When a driver wants more comph, as in getting away from a light or in passing, he hits the accelerator hard. That taps a vacuum line normally used as a booster for the fuel flow. Piped to a diaphragm at the front carburetor, it unloads a spring that holds the butterfly valves closed. That's all—except that the rear carburetor is linked mechanically to the front one.

On a cold start, the choke locks out all but the center carburetor

Many changes besides those described in November PS (p. 105) have been made in Chevy's fuel-injection system.

It operates on a leaner mixture. Air leaks around the nozzle anchorages have been sealed off. Dirty fuel can stopper a fuel nozzle like a cork. Purity is assured by backing up a general fuel screen with tiny acreens in each nozzle. (Maintenance memo: These screens do not have to be cleaned, says Chevy.)

A Rube Goldberg arrangement for cold starts—a solenoid to increase fuel flow, plus a microswitch to bypass it for hot starts—has vanished. In its place is an enrichment valve operated simply by manifold vacuum.

The principle is simple: On a cold start with a stiff engine, there's a high cranking vacuum; on a hot start with a free engine, less. A diaphragm that meters and enriches the fuel responds accordingly.

Incidentally, for competition, a hot cam boosts the Corvette's 283-inch fuel-injection engine to an incredible 290 horsepower.

The new Chevrolets, bellwethered by a romantic number called the Impala—which is right out of the pages of the Arabian Nights—are nine inches longer and almost four inches wider. The height, inevitably, has tobogganed by almost $4\frac{1}{2}$ inches. The hood is an inch shorter, the deck lid nine inches longer.

Yup, air springs. You don't have to

228 POPULAR SCIENCE

SPECIAL TRADE-IN OFFER!





ALLOWANCE FOR YOUR OLD TORCH*

toward a modern, convenient

BERNZ () MATIC

TX-868 All-Purpose

TORCH KIT

LESS YOUR TRADE-IN \$1.00

"ANY OLD TORCH -- Gasoline, Butane, Kerosene, "Tin-Can" Type, Alcohol, Propone—regardless of age or condition.



- Utility burner head
- Soldering hp
- Flome spreader

Torch with pencil burner

Here is how you'll use your Bernz-O-Matic All-Purpose Torch Kit

PAINT REMOVING



All loose paint must be removed to prevent peeling later. The Bernz -O-Matic Torch with flame spreoder at tochment makes paint removing simple.

SWEATING COPPER TUBING



Now you can install or repair copper tubing in your home. The Barnzeasier than ever.

ASPHALT TILE LAYING



The Bernz-O-Matic Torch provides a handy method of heating which makes It easy to lay or repair asphalt tile in any room of your house.

THAWING FROZEN PIPES



PATCHING A GUTTER LEAK

LOOSENING NUTS and BOLTS



With your 8emz-O-Motic Torch you can aften repair gutter leaks, saving the cost of replacing.



Be proposed to meet this common winter emergency. Portable, safe, and easy, your Bernz-O-

Corroded nuts and bolts loosen quickly with a few blests from your 6emz-O-Matic Torch, Safe and easy for those "do-ityourself" jobs around the garage.

HUNDREDS OF OTHER USES:

- Plumbing repairs
- Lighting charcoal fires
- Antiquing furniture Softening old putty
- Bectrical work
- Glass working
- Metal handicrafts
- Pipe and jewelry soldering

Send for FREE Color Brochure describing all Bernz-O-Matic products

OTTO BERNZ CO., INC., ROCHESTER, N.Y.

EARN

with one of these "simplified"

arc welders

EASY TO USE!
EASY TO BUY!
EASY TO CASH IN
ON THE BIG DEMAND
FOR WELDING WORK!

You can put more money in your pocket - get into your own profitable business with any one of these highly efficient low cost

"HUSKY BOY." 200 amp
"HUSKY BOY air ecoled welds
anywhere It a light rugged.
compact—eastly mounts on your
tractor or trailer for traveling
to emergency repair jobs. Portable mountings for shop use are
available.

AC TRANSFORMER, 295 amp. AC Welder for operating on single phase 220 voit power Just rest for production and repair work in shops. A welder that quickly pays for itself out of extra extrance.

"BANTAM CHAMP" A 250 amp professing designed to let you do professing designed to let you do professing repair work in your own ahop or production weld not

HOBART TRADE SCHOOL. Get the details on how you can quickly earn are we ding by actual on-the job experience Full or partial courses. Non profit school low tu tion.

LESSONS BOOK. 200 pages fully (flustrated complete with charts and diagrams. Self teaching \$1.00

HOBART BROS. CO., BOX P-127 Phone FE 2-1223 TROY, ONIO

"One of the world a targest builders at arc welding equipment"



"Husky Bay"



2 AC Transformer



"Bantam Champ"

Build Your Own!

drive welder

Simply connect this Hobert generator only to a good used auto engine. Gives you all the advantages of a factory-built welder. Ask for FREE build



0	welder. Ask for FREE build your own book
	HOBART BROTHERS CO , SOX P 127, TROY, ONIO
	1. Husky Boy 4 Build Your Own 2 AC Transformer 5. Hobort Trade School 3. SANTAM CHAMP
	Enclosed is \$1,00 for Welding Leasons Book.
	Name
	Address

The '58 Ford—How It Stacks Up have them, of course—they're strictly optional.

PLYMOUTH

Plymouth for 1958 is just what the customers might expect of a vehicle that has changed its look only modestly. It offers performance. Its "bomb" power plant, available on any Plymouth model, has not one but two four-barrel pots, a dual-exhaust system and a dual-breaker distributor.

All this has required commensurate changes: a heavy-duty generator, beefier springs and shock absorbers, and a heftier cooling system. The company's word jugglers call their 10:1-compression-ratio engine the Golden Commando.

The Fury engine of 318 cubic inches, a topic for discussions 'round the cracker barrel in 1957, can still be had, even if old-hat now. It has undergone some refinements. A two-barrel carburetor is standard; a four-barrel with dual exhaust, special timing and high-performance cam is optional. For all Plymouths, too.

There's eight-barrel carburetion on this engine for Plymouth Fury models only. And for the man who just wants good transportation, the flathead six is still around.

The Bendix fuel-injection system (PS, Mar.) can be had only on the big engine. The Chrysler Corp.'s limitation on this option is evidence to Detroit's professional seers that Chrysler will announce its own system before long. And, breathless and hot-palmed from its own research in this field for three years, so will Ford.

Plymouth's three-speed automatic transmission now comes as an option on all models as an answer to Ford's refined box and Chevrolet's silky Turboglide.

Plymouth's body measurements are mostly unchanged from '57.

That resolution adopted last June by Detroit's tycoons recommended that automobile manufacturers "not advertise or publicize actual or comparative capabilities of passenger cars for speed, or specific engine size, torque, horsepower or ability to accelerate or perform, in any context that suggests speed."

They won't, either. But Detroit's "bombs" for '58 would seem to imply that the engineers on the working level never got the word.




Why Magna?

- Because MAGNA's new, complete family of superior power tools incorporates the first significant design contributions in over a quarter-century!

HERE'S WHY THE MAGNA 9-IN. SAW-JOINTER gives you industrial capacity and precision. • Increased Capacity-built-in table extension makes largest effective table of any 9-m. saw; 4-in. Jointer has longest table, largest fence, over %' depth of cut! · Ease of Operation - Saw has One-Knob Control, exclusive Speed-Gear for quick tilt; Jointer operates at any height of saw blade! • Rugged Durability-Saw's procision-cast tub front. Massive cast-iron carriage, lointer has one-piece cast fron fence! a Integral Precision-self-aligning saw fence locks down front and rear with one knob; Jointer has precision-ground surfaces! Mail coupon today for free Magna-Line catalog! Or a sec

Own a Magna 8-in Saw-Jointer for as little as \$2.30 a week!

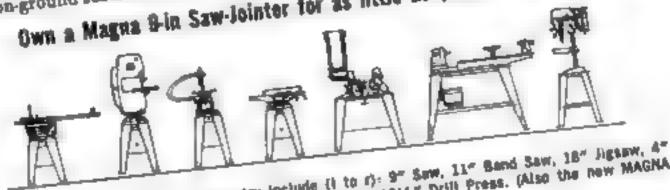

Jointer, &" Belt Sander, Compressor-Sprayer, 30" Lathe, 1242" Drill Press, (Also the new MAGNA Trackles, Three, Set T.A. Sant 12142" Heavy At Rais Sander). Thrifty-Three: 8" T/A Saw, 121/2" Higsaw, 4" Belt Sander).



World's largest independent producers of power tools

40.0	elt Sander).	
1	MACNA POWER TOOL CORPORATION Dept. 702-S, Menio Park, California, Dept. 702-S, Box 2808, Fort Wayne, Please sand me your free, Hustrated	OR Indiana I MAGNA-LINE Catalogs
	Please send me your tree, man	
1	Name.	
1		ne. State
ì	City-	





How Good Are Your School's Shops?

(Continued from page 115)

these six states, you can get more information by writing to the supervisor of vocational education in the state department of education.

In the other 42 states, the pattern varies widely. Your best bet: Talk to the guidance director or principal of your local high school.

Suppose there is no vocational-training program in your area? Can you get one started? The people in suburban Nassau County (N.Y.) did.

Four years ago Nassau school authorities enlisted 2,000 volunteers to get the facts on the need for a vocational school. This volunteer brigade surveyed 26,000 people—parents, students, employers, plain taxpayers. They found:

 Half the county's skilled workers were being imported from other areas, although the county's population was 1,000,000.

 One out of five students in the upper grades favored vocational training.

 Three out of five parents wanted a vocational program.

The survey brought results. Nassau County is going ahead carefully but swiftly: This fall 80 boys enrolled in the county's brand-new "pilot" school to study electronics and air conditioning.

Judging your school. In considering vocational training, remember that your son can choose among several ways of learning a trade (other possibilities: post-high-school technical institute, apprenticeship). So you should look long and hard at your vocational school to make sure that it gives the kind of training your son will need

You can judge the quality of this training yourself, simply by visiting the school and by talking to teachers, graduates and employers.

The experts I interviewed suggested six points to keep in mind:

1. Students. Are they boys who want, need and can use the training? Or is the school a dumping ground for misfita?

- Teachers. They should be masters
 of their crafts, and educators as well.
 Connecticut requires eight years' industrial experience, 60 hours' teacher training. Qualified guidance counselors are
 essential.
 - 3. Facilities. The shops should have up-

OLDSmobility)

EXCITING THOCKET AGE STYLE THAT REFLECTS YOUR OWN GOOD TASTE!



A 1958 Oldsmobile is waiting for you . . . a car that's in a class by itself! A new Rocket Engine car, . . a magnificent performer in the famous Rocket tradition, and offering the greatest improvement in fuel economy in Oldsmobile history. Beneath the exciting distinction of line and color ... beyond the renowned power plant ... are new expressions of Oldsmobile's style and engineering leadership. For example, New-Matic Ride* (Oldsmobile's true air suspension) is the greatest advance in riding comfort since air was first put in tires! And this is only the beginning. In every way, this is your car for this mobile era! OLDSMOBILE DIVISION, GENERAL MOTORS CORP.

OLDSMOBILE




SEE YOUR NEAREST AUTHORIZED OLDSMOBILE QUALITY

CHRISTMAS HINTS



from the

Weldwood Wizard

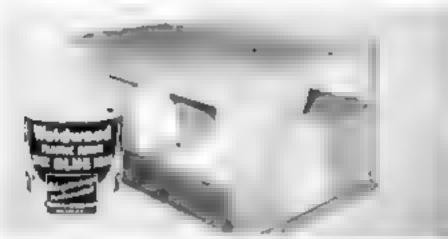

Make Christmae Gifts Like This With Weldwood Plastic Rusin Glue. Build this Weldwood Plywood playschool bench with Plastic Resin Glue for strong, permanent joints. 314-oz. cans, 356; 8-oz., 656. New 96-page Weldwood book gives 18 projects you can build. A 506 value—only 256 with coupon.



Give A Bost Kit And Weldwood Waterproof Resercine!

Give. A kit boat built with Weldwood Waterproof

Plywoods and Weldwood Waterproof Give gives

years of low-maintenance pleasure. New easy-to-mix

glue makes a completely waterproof bond that's

impervious to heat, cold, fungus, oils. Sizes from \$1.00.

Weldwood® Wizards

Adherives, Brzite[®], Setialoc[®], Bezilie Weod-Trim[®]
On Sale of
Hardware, Point, and Lumber Dealers^{*}

Ou Still	91			
Foint, and	Lumber	Deglers*	723	- E
			1	
			.,	
R PINE PR	OFFICE	ROOK TOD	AV-CA	WE SEA

SEND FOR PINE	ROJECTS BOOK	TODAY-SAVE 25
---------------	--------------	---------------

United States Plywood Corporation Box 61, New York 46, N. Y.

PS 12-57

Please send me my copy of your 96-page book, "Projects You Can Build With Weldwood Old Craftman Piec Mywood."

I enclose 25¢

STREET

CITY.....

.... STATE...

How Good Are Your School's Shops?

to-date tools and machines similar to those actually used in industry. To help you judge the adequacy of the investment, one rule of thumb is the experience of two recently built schools. They cost \$3,000 per student for buildings and land, \$1,000 per student for equipment,

Understandably, schools move slower than industry in adopting new types of equipment. Even the best may be five or 10 years behind. Two outstanding systems—in Milwaukee and Connecticut—for instance, found recently that printing firms needed offset platemakers and pressmen, but the school print shops had no offset equipment at all.

4. Courses. They should be slanted toward local needs (in Iowa, truck and tractor mechanics would be in demand, but foundry workers would not); they should be up to date (aircraft mechanics need training in jet as well as piston engines); and they should be extremely practical, imitating as closely as possible actual working conditions on the job.

5. Academic education. These days, a craitsman can't get by just with his hands. He has to know English, math and history, too. Vocational schools devote less time to these subjects than the general high schools, but the good ones turn out educated citizens prepared to make their way in the world.

6. Activities. Vocational students deserve them, too—sports, dances and the rest of the fun and excitement that go with an American high-school education.

Where schools that measure up to those standards are available, everybody gains. Employer and employee groups say so in concrete terms: better jobs.

Among the Nassau County businessmen who answered the school survey, twothirds of the manufacturing firms and three-fifths of the trade and service companies gave the inside track for jobs to applicants with vocational training in high school.

The union viewpoint? A remark by Joseph M. Rourke, secretary-treasurer of the Connecticut AFL, is typical. He said: "If I had my way, before anyone was allowed to accept apprenticeship in the union of which I am a member . . . he would have to be a graduate of a vocational school . . . or have had equivalent training."

These men chose before enlistment— so can you!




Pvt. Fleyd E. Van Briesen Brookings, L. Bradesta, School of Agniculture

"I picked my own Army job training, and it was guaran-

teed for me before I enlisted. I chose a fine Diesel Repair course. My instructors were really good, and the training equipment was the best you could find Now I'm an expert in diesels. I found only the Army others a deal like this."

Pfc. Allen M. Voetz Bouler, Wisconein Graduets, Bouler Union Free High school


"If you want an education, there's no

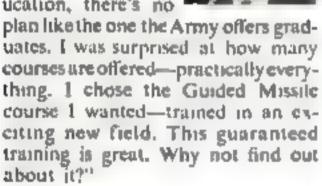

Seniors—get all the details on how high school graduates can choose their technical training before enlistment from 127 modern courses. Mail this coupon for your free booklet today. Or for immediate counseling visit your local Army Recruiter. He's listed in the phone book and will give you all the facts—at no obligation!

Duport	muni e ngion	NT GE of the A 25, D.C.	·m·v	FS-	-12-57
teiling choose	how their	high a	free A chool go of trains Army G	roduate na beso	a con
Name					
Addre	D				



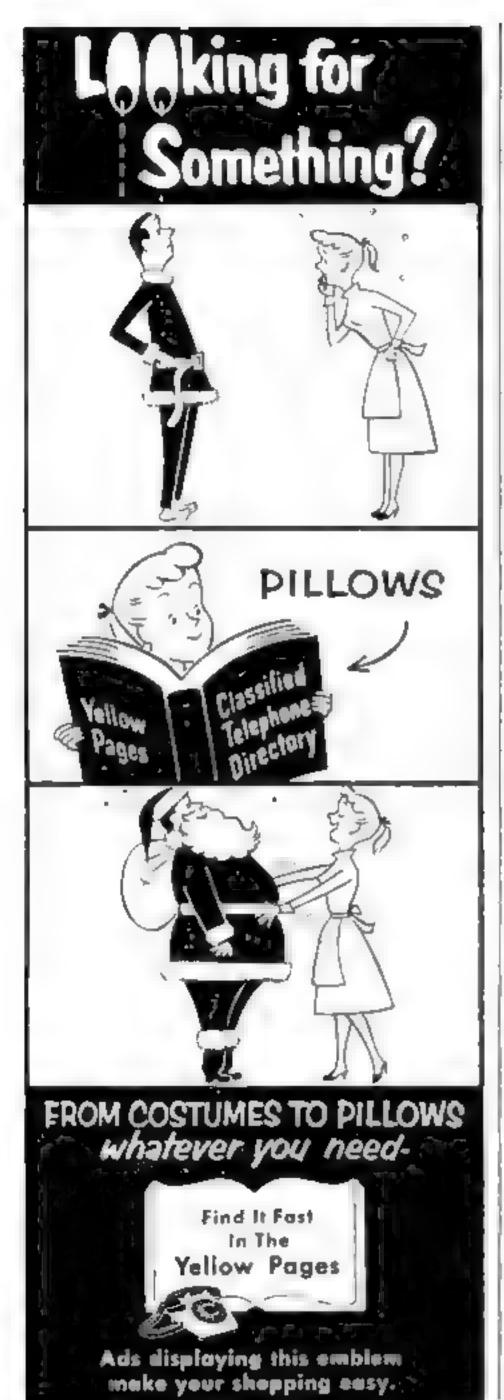

New PS Record Tests Your Hi-Fi

[Continued from page 186]
the fundamental (filtered-out) tone even
though it isn't there.

But this isn't merely an intriguing trick. It has an important bearing on your listening pleasure—as the test record can bring out: Many hi-fi fans go along accepting inferior bass response, until they have heard better.

Anyone's ear gets tired supplying these missing tones after a while. You develop a kind of listener fatigue. If your hearing is doing part of the work your rig should do, you ought to know it.

Other tricks may also fool your hearing, unless you have a way of checking on them. Take your speaker, for example. You may think you're getting a lot of bass for your money when, in truth, the speaker and its enclosure could have a design that peaks the bass output between 100 and 200 cycles.

Э.

This juke-box engineering gives a throbbing bass to a rock-and-roll piece. But it tends to make all bass notes sound alike, and to blur the instrumental sounds at the lowest register.


Obviously, you can't expect a modestly priced set to reproduce the very lowest tones. But possibly you'd like a less prominent but cleaner base—for symphonica instead of rock-and-roll. You'll get a more natural sound if your rig gives a smooth response down to its lower limit.

High frequencies come next, once your bass-note problems are out of the way. It costs a manufacturer comparatively little to give you all the highs you're willing to take. But does your present setup give you real high-fidelity on the highs?

With the test record, you can learn the true role of high frequencies, and why you need them.


The fundamental tones of most instruments fall below 3,000 cycles. So the cheapest box can reproduce the highest fundamental without strain. But, after the fundamentals, what gives an instrument its distinctive personality is its overtone pattern. That's why "concert A" on a violin sounds entirely different from the same note played on a flute.

There you have the real reason why you need good high-frequency response. The overtones go up as high as 15,000 cycles with many instruments. And the response must keep the overtones in proper

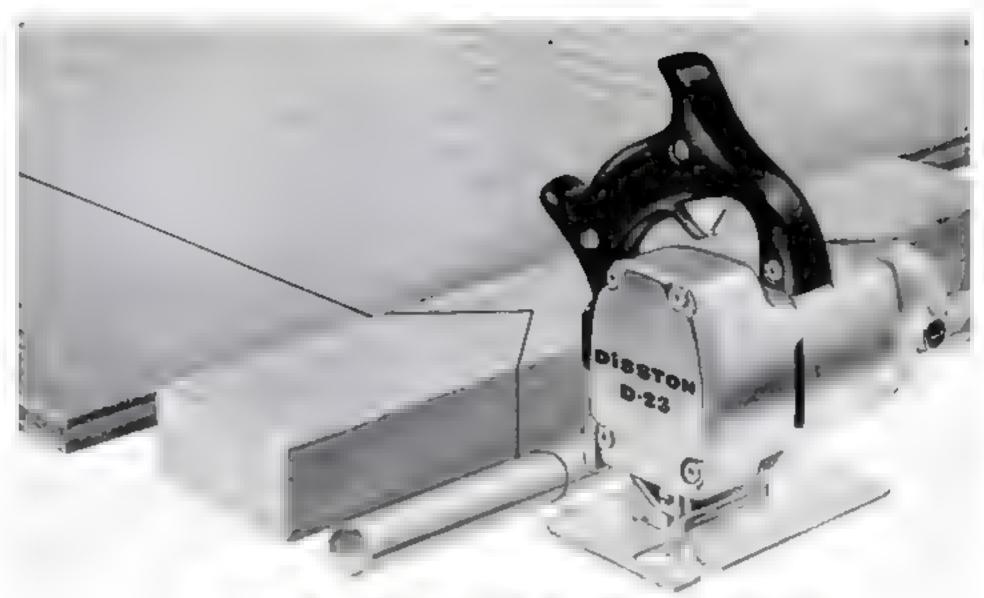

NOW, A VERSATILE, 51/4 POUND TOOL THAT CUTS WOOD, METAL, PLASTIC

D-23 ELECTRIC HAND SAW

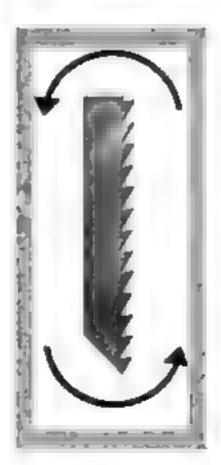

HERE'S A GREAT NEW DISSTON tool for both professionals and hobbyists with a name famous for good saws for more than 100 years. The DISSTON D-23 has proved itself

tive electric saw. It has extra easy-tochange blades for cutting plywood, 2 x 4's, plank lumber, sheet metal, pipe, tubing and plastics. It saws straight lines, circles, scrolls or bevels 15% to 50% faster than any competi- with a true, fray-less cut. Only \$98.50

"ORBITE" ACTION. The blade of the DISSTON D-23 has an orbital motion (at 3,800 strokes per minute). It cuts on the upstroke, moves away from the material on the downstroke. The result is fast, professional work with minimum wear on the blade.

FREE BOOKLET: Write today for an illustrated booklet about many more convenient and exclusive features of the DISSTON D-23. Address: H. K. Porter Company, Inc., Henry Disston Div., 412 Tacony, Philadelphia 35, Pa.

I. K. PORTER COMPANY, INC.

DISSTON



NEW PEP NEW POWER

Frees sticky rings and valves

Get increased pick-up and improved engine performance! Casite—the "tune-up in a can"—through the air intake or added to gasoline, restores split-second valve timing and full compression.

Prevents hydraulic lifter trouble

Casite keeps valve lifters clean and freeworking. Just put a pint in the crankcase every 1,000 miles, and with every oil change.

Assures safe, smooth break-in

New and rebuilt engines wear-in smoothly and safely with Casite in the oil. Penetrates tight spots—eliminates overheating, scoring.

Cuts start-up wear


Speeds oil flow-protects closely-fitted parts during warm-up periods. Almost doubles engine life.

. Gets rid of sludge and gum

Casite removes gum and goo—KEEPs the engine clean—increases power, improves performance, saves gas and repairs, too.

Results guaranteed, or double-your-money-back!

Get Casite at your service station, garage or accessory store.

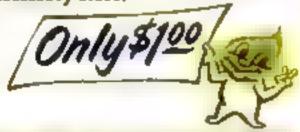

HASTINGS MFG. CO., HASTINGS, MICH.
Piston Rings, Oil Filters, Spark Plugs

New PS Record Tests Your Hi-Fi

relationship. Emphasizing particular frequencies will distort the true sound. If your speaker has sharp peaks that favor spot frequencies, it can make the squeaks of the violin bow or tinkle of triangles come through loud and clear, yet reproduce the oboe so it sounds like a clarinet,

One of the record's checks for high-frequency response works like this: A violin, clarinet, flute and oboe play a simple tune twice. The first time, you may think it is the same instrument all the way through. Reason: A filter has chopped off the overtones at the time of recording. The second time, without the filter, the instruments will sound as they ought to. You should have no difficulty identifying their different sounds.

But what if you can't identify them on the second playing? Then here are two possible faults you can check: Your stylus could be badly worn. Or "peaky" speaker response, favoring particular frequencies, may be to blame. If neither part is defective—and you can determine this with still another test on the record—what you hear may convince you that it's time to buy a better speaker or pickup.

3

How do individual instruments sound on your machine as they run through their respective ranges? On the test record, each demonstrates by playing up and down its range. Cut-off filters show what happens when sounds above 3,000 cycles and 6,000 cycles are blocked.

Here's something you should know about instrument sounds, especially if you're in the market for a new tweeter. Do the recorded sounds of some instruments please you more than others? A little-understood characteristic of speakers may cause this. A horn-type speaker, for example, usually gives greater realism to brass instruments, while a cone tweeter often sounds better for the strings.

Another point: Response of the highs at one end of the range and the lows at the other should be a matter of balance. The right balance between the two ends makes more difference in how good your rig sounds than a few extra cycles at either end will ever make.

Say your pocketbook dictates a hi-fi rig with a bass response that stops at 100 cycles (better bass response is costly, remember). Then your rig will sound better if its high end is limited to about 5,000



HUNDREDS OF USES

Here's just the material for your special projects and odd jobs—steel bars in handy, standard lengths. Inexpensive, and readily available, too.

Made by Makers of popular REDI-BOLT Threaded Steel Rods

SIZES

ROUNDS(36' Longths) 1/4', 5/16', 3/8', 7/16', 1/2', 5/8' & 3/4' diam.

FLATS [36" Lengths] 3/4", 1", & 1-1/4", wide a 1/8" thick.


AMGLES (36°, 49°, 6 80° lengths AR 3/8° x 1-1/4° x 1-1/4°.

Ask Your Hardwere Dealer, or write

REDI-BOLT, INC., 5344 Indianapolis Blvd., East Chicago, Ind.

NEW, IMPROVED CALCULATOR FOR WOODWORKERS only 25c

Instantly gives auformation on humber, dath, concrete factors, pointing materials, etc. Convenient, aimple to read. Just are dial for now specifications, to convert linear to board feet, and but were for screws, compare characteristics of woods. 8' dismour heavily varieshed cardhoard. Send 13c, no stamps, please to Greenice Tool Co., 2132 Columbia Avenue, Rockford, Illinois.



Now Available with Built-in Generator for Lighting, etc. Series AU, 2, 2½, 3 hp Illustrated.

INDUSTRIAL AIR-COOLED ENGINE DIV.

DO MORE PLANING JO


EXCLUSIVE MUNEY MARING FASTERS FALL PAYMENT

121.4" s 6" capacity = Power lands of -4" EASY TERMS
to 34 a moute = Provides for Granbag Koness or the Cottonhand = Affectments for Joseph tember only loop priced stack, Grover, Canvert into cost rough tember only loop priced stack, Easy to make flaming and popular potterm. Sand Today to FREE Libertury and Prices.

Belsow Machinery Co., 2068 Field Bidg., K.C. 11, Mo.

DO EVERY FASTENING JOB

Amazing one-hand operation, 10 times faster than hammer & nails Can't jam




er lumber yard.

ARROW

DO-IT-YOURSELF TACKER, No. T-50

for ceiting tile, insulation, wire fence & every home job

Arrow Fastener Co., Inc., 1 Junius St., Brooklyn, M. Y.

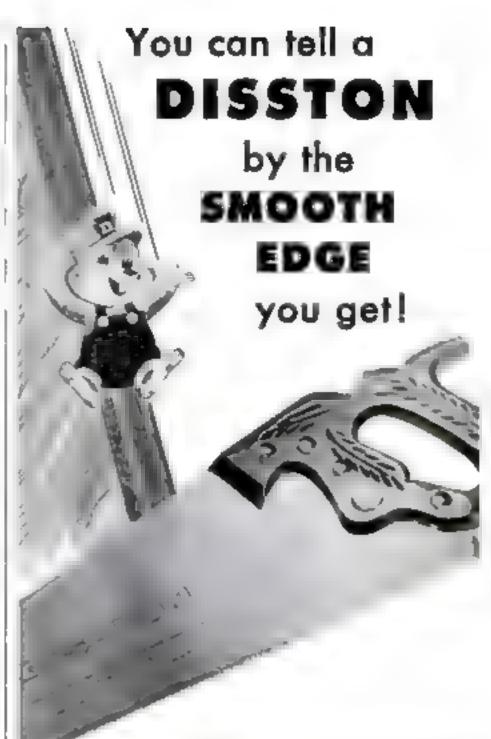

Next time you cut plywood or other well-seasoned woods, use a 10-, 11- or 12-point Disston Hand Saw. Note how easily it cuts . . . what a beautifully smooth finished edge it leaves! That's because these fine-toothed saws are specifically designed for finishing work. Made of fine tool steel, with perfectly tempered and double taper ground blade, Disston Saws give years and years of service, too.

At better bardware dealers ... everywhere!



Choose is \$75-point District Hand Says for cattling with the grain. Charge a 7-, 1- or 9-point Disting Band Sew for criting across the grain.

FREE MUSTRATED BOOKLETI 64-page Disston Saw, Tool & File Manual. Tells how to choose and use tools; how to care for them. Helpful hints on wood and metal working, and selection of materials. For your free copy write today to: Henry Disston Division, H. K. Porter Company, Inc., Philadelphia 35, Pa.

H. K. PORTER COMPANY, INC.

Henry DISSTON DIVISION

?? SHOP QUIZ??

Question 1

What's the **EASIEST** way to drive wood screws?

Question 2_

What's the **EASIEST** way to remove wood screws?

Question 3.

What's the **EASIEST** way to run nuts or bolts on or off?

Question 4

What's the **EASIEST** way to use heavy-duty cutting tools like hole saws, masonry and auger bits?



WITH YOUR ELECTRIC DRILL AND A

Supreme Versamatic

Reversible speed reduction attachment that fits every power drill. Increases power 7 times. Reverses with one simple twist. A must for every drill owner.

\$1495

AT LEADING TOOL COUNTERS

By the makers of SUPREME BRAND CHUCKS

SUPREME PRODUCTS CORPORATION

2222 S. Calumet, Chicago 16, Illinois
A Division of A-S-R Products Corporation

New PS Record Tests Your Hi-Fi

cycles. But if you insist on going up to around 15,000 cycles, then your rig must also reach down to 30 or 35 cycles in order to give you the most pleasing results.

Mechanics as well as electronics helps reproduce the music you hear. Music is a succession of tones that are always starting and stopping. To reproduce it faithfully your rig must start a sound without hesitation, end it abruptly. The ability to do this is called transient response.

Instruments that are struck or plucked —piano, drums, harpsichord—make the

NEXT MONTH: Ready-made hi-fi? Right! No need now to solder together a lot of separate parts. For a guide to the best value, see January PS.

greatest demands in transient response. Clean reproduction of such tones demands violent acceleration and braking of the moving parts in the speaker and pickup. 3

So these are the parts most likely to let you down. The electronic parts, having only weightless electrons to deal with, seldom cause trouble here.

The PS record manual gives you tips on tracing troubles and curing them. You can check not only the overall transient response, but find the component responsible for poor performance.

Sometimes the trouble is just a wad of goo collected on the stylus. Or you may need to increase the downward force on the pickup. If the sound hangs on after the tone stops, the trouble is probably in your speaker or its enclosure. Whatever the source, the record will help track it down.

Dynamic range is another hi-fi characteristic you should be aware of. It is the contrast you hear between the softest and loudest sounds at a particular volume setting. The maximum range is predetermined by the recording itself.

But the contrast often diminishes as the months pass. Age is a villain for even the best systems.

You aren't likely to notice the slow deterioration. But here, too, periodic checkups with the Popular Science Test Record can help you keep your hi-fi equipment up to peak performance. END



To make locks work easier and last longer, add a few drops of LOCK-EASE to any lock mechanism. LOCK-EASE a graphited fluid flushes out dirtleaves a long-wearing protective film to seal out rain, snow, salt, ice and dust that cause locks to stick, rust and wear out. LOCK-EASE prevents keys from sticking...locks from freez-

ing. Use LOCK-EASE on car locks, garago locks, padlocks and all door locks in and out of the home. For best results, "LOCK-EASE" locks regularly 4-oz, "Drop or Stream" can only 49c, everywhere.





American Greese Stick Co. Muskegon, Michigan

L

CHOOSE DEPENDABLE 5-RIB

CHAMPION

SPARK PLUGS

3 WORKSHOP PLANS TO FIT YOUR SPACE AND BUDGET

Build your own workshop! Get complete plans, easy-tofollow instructions and bills of mater of for three Deho designed shoos—plus Deha's New Workshop Reference Manual. Send name and address with 25c in coin las Delto Power Tool Division, Rockwell Mfg. Company, 504M No. Lexington Ave., Pittsburgh B, Po.



The Quality Fasteber that adds to the beauty and permanence of your projects - yet costs no more than conventional festeners. At all good hardware and harding supply dealers!

Straight, curved, single or double With any coint paint stripe furniture, bakes, auton modes planes, toys line cum, wailboard Clean crosp decorative lines Land clog or smear A so use with glue tempera text) e paint or underg use on wood g use piantic ceramics metass inbrics and paper Ask your dealer or order disect

DEALERS

HOBBY Master punt "Professiona." striping too, results every in display the Smple, Indostrial carton Write easy to des striping for discuss Order now tools

Ask about beney duty

5 COMBINATIONS. . .

Extra 1. 4 Ho..\$1.20


4234 LINCOLN AVE DOT 236 CHICAGO 16. |LLINUIS

Single stripe model **\$ 1 25**

Other single \$175 stripe models | r. 1 64 , 1 32', 3 64', 8 64', 3 32' & 1 6'

Complete Kit \$5 88 (all 7 tips)

Extra tips 90c ea.

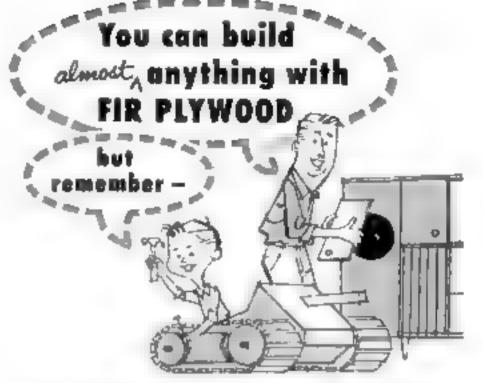

LOOK FOR THE DFPA QUALITY



When you see the letters DFPA on panel you know you're getting plywood quality-tested to meet rigid industry standards. DFPA trademarks attest quality, performance and value.

CHOOSE THE RIGHT GRADE FOR EACH JOB

Exterior plywood for outdoor & marine use

PlyPanel & for paneling, most indoor uses

Ply Scord > (unsanded economy panel) for sheathing, backing

-712

PLINE



Choose Exterior-type (waterproof glue) for outdoor and marine uses: Interior-type for inside jobs. Within each type are several appearance grades (panels with one good side, two good sides, etc.). See your lumber dealer Hell help you choose the right grade, help with ideas and plans.

SPECIALTY PANELS include I fextured plywood with smart grooved, striated or brushed surfaces for special decorative effects; 2. overlaid plywood (smooth, durab a resin fiber surfaces) for extra quality work.

> FREE: Helpful booklets that show how to buy, use and finish plywood. Also, list of avoilable homecraft plans. Write (USA only) Douglas Fir Plywood Assoc., Tocoma 2, Wash., Dept. 11.



it's a good rule.

Hey, Dad! Hey, Son!

Merry Christmas and happy tool years!

Stanley Tools are welcome gifts for man and boy. Here are exciting new tools men and boys everywhere love to get their hands on. They make wonderful Christmas gifts. They're on sale now wherever you buy tools.

Stanley "Glide-O-Matic" • The rule that remembers. Push-button lock holds blade where you want it, steel scribers mark work exactly, blade rewinds automatically. Easy to read black on white, 8, 10 and 12 ft. lengths. Be precise . . . say Stanley.




Stanley "Surform" • New miracle speed forming tools of 1001 uses. Easy to use, fast, for expert or beginner, "Surform" files, smooths and forms the surface of wood, plywood, plastics, asphalt, tile, aluminum, etc. file type—\$2.69, Plone type—\$3.69.

Stanley "Steelmaster" • The finest hammer ever made. All steel ... perfect balance ... exclusive heat treating minimizes chipping of hammer face ... cushioned Neoprene grip Beautifully polished, chrome and black finish. 13, 16 and 20 oz. sizes. 16 oz., only \$4.98.


Ask for free check list folder "Stanley Tools for Christmas," or write for a copy to Stanley Tools, Division of The Stanley Works, 63D Elm St., New Britain, Conn.



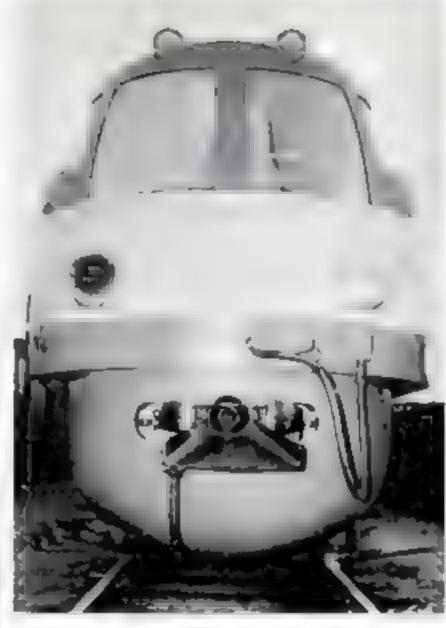

Railroad car tilts on curves

A NEW French self-propelled railway car (above) is always on the level. There is no cant, so they say, even when it takes a curve without slacking its 110-m.p.h. speed. The overhanging upper section of the car tilts on the undercarriage.

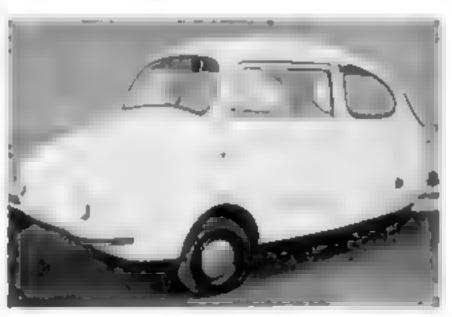

German auto parks in 10 feet

The Fulda above stretches an aluminum body over a six-foot wheelbase, but seats four or five under its $4\frac{1}{2}$ -foot-high roof. Using only a gallon of gas for the 10-hp. motor, the car can cover 62 miles at 43 m.p.h. It rolls on four wheels—two on a short rear axle—and all four tires cost no more than one ordinary one.



WITH Warren SAWING WASHERS

Cut 40 smooth, accurate, parallel grooves - any angle, with your present as w blade. Dial desired width with Micromatic adjustment Leave on saw for straight cuts. Sizes to fit your arbor - ½ ", ½ ", ½ ", 1" A perfect gift for woodworkers. See your dealer or write?

SIND FOR FREE BOOKLET

WARREN WASHERS COMPANY



The Modern PLASTIC for Esting Home Repairs

PERMANENTLY mends cracks of have in wood tile stone or planter. Sticks and stars put—Does not chep, shrink or fall out. Ensy to use Economical Mobilit cheef it, polish or paint if The big 4 lb can is obtainable from your lumber paint or hardware dealer at \$1.25 or will be shipped direct postpaid in U.S.) for \$1.50 Campiels sat slact on guaranteed or your money refunded. Order now

DONALD DURHAM CO.

Box 804-U Des Moines, lews

SAVE OIL! SAVE GAS!

Sealed Power
KromeX Piston Ring Sets

BEST IN NEW CARS! BEST IN OLD CARS!



YOU SHOULD EQUIP

BULL DOG

AXLE ASSEMBLIES

JACKS • COUPLERS

Straight or drop axies in single or tandem—capacity up to 10,000 lbs.—any width, Also Torq-Less Axies for all types of trailers

JACKS-Bull Dog Jacks make bitching and parking a one-man job.


couplers -Bull Dog Couplers bitch or unhitch to trailer in a moment.

Write today for FREE Descriptive folder 14-8



HAMMER BLOW TOOL COMPANY WAUSAU, WISCONSIN

New BLACK & DECKER POWER KITS ring the bell in a raft of jobs!

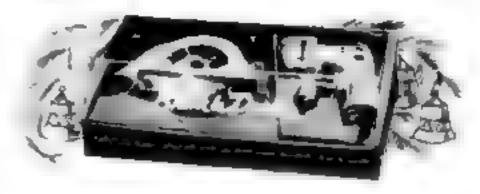

- Powerful B&D U-3 1/4" Drill
- Choice of three attachments engineered especially for B&D Drills



Jig Saw-Drill Power Kit teams B&D Jig Saw Attachment with U-3 Drill. Makes bookends, toys, repairs.



Sander-Drill Power Kit pairs B&D Orbital Sanding Attachment with U-3 Drill. Refinishes built-ins, furniture, antiques.




Saw-Drill Power Kit combines B&D Saw Attachment (world's safest) with U-3 Drill. Makes book shelves, furniture, toys.

Black & Decker Tools are priced to fit your budget! Kits from \$39.95—Tools from \$29.95 —Attachments from \$10.45. The Black & Decker Mfg. Co., Dept. \$127, Towson 4, Md. (In Canada: P.O. Box 278, Brockville, Ont.)



Black & Decker & World's Largest Maker of Electric Tools

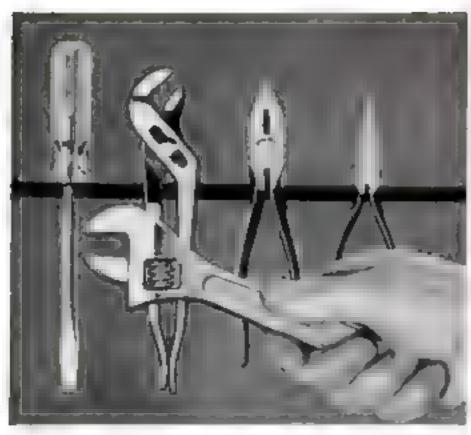

Home Hobbyist Tools by UTICA

Wherever you see the most useful of all modern hand tools at work you'll find Utica pliers, wrenches, screw drivers, etc. Hall-mark of quality in hand tools since 1895! Precision made, Backed by famous guarantee. At leading hardware stores everywhere!

UTICA DROF FORGE AND TOOL DIVISION Kelsey-Heyes Co., Utice 4, N.Y.

"Use Utice the tools the experts use"

BUTANE BLOW TORCH

SOLDERSI BRAZESI FIXES LEAKSI



Every do-it-yourself and hobby fan needs this Kidde JET KING butane Blow Torch. Just the tool you've been looking for to do dozens of jobs in home or hobby...TV. appliance, lamp, radio or plumbing repairs...precision soldering, brazing or metal craft Useful, too, for starting charcoal fires. A tiny, clean, safe charger does the job.

Each charger gives 30 minutes of intense 3500° pinpoint flame; turns on and off. Extra chargers, 49c per box of 2 Money back guarantee. At leading hardware and hobby stores ... or send check or money order, we pay postage.



KIDDE MANUFACTURING CO., INC. Dept. PS-12

42 Farrand Struct, Bloomfield, K. J.

Please send me _____ JET KING BLOW TORCHES pluts _____ boxes extra chargers [limit 2 boxes per terch]. My chack ____ fs enclased.

Name_

City_

State



Toy plane is modeled on jet

FEATURING a stub three-blade prop and wing-tip "fuel tanks," this flying model is styled after modern fighters. Called a "Turbojet" by Wen-Mac, Los Angeles, it runs on a glow-plug, has a recoil starter and flexible-plastic wings.



Glowing plug restarts jet

This platinum-alloy rod set in a jet's combustion chamber stays hot when engine fire dies, instantly re-ignites the fuel. Made by Charles Engelhard, Inc., East Newark, N. J., it is used in BOAC jets.

MARKA SIRET FROM AD

ANDSAVEAT FRACTION OF GROBAN'S

SATISFACTION DUARANTED

BRAND NEW!

ELECTRIC HYDRAULIC PUMP



WITH REVERSING SOLENOIDS! Jeep-Truck-Car-Tructor

To Lift Snow Plows

 For Convertible Tops For Hydraulic Jocks and Holsts.

A few simple connections to battery and a hydraulic cyl-inder complete the circuit INCLUDES - AUTOLITE Motor Driven

(YEM = 472 Ships Wt 26 lbs. A GROBAN SPECIAL

Pump, Oi. Tank, and Pair of Solenoids 24.50 Ea. Chicago F 0 B.

HYDRAULIC CYLINDERS FOR ABOVE PUMP:

Item 33C-112" Bore, 452" Stroke, Double Acting Lieus 122-11,2 Bore, 51/2 Stroke, 4, shaft. Double Acting Bore, 6" Stroke, 1/4" Shaft Double Acting Cievis Mounting 12.50 HYDRAULIC HOSE-4 Ft. z 1/4" with Fittings 2.30 cs.



PORTABLE 1000 WATT A. C.

> Electricity For Your Comfort

COMPACT-Fils in the trunk of your car FAST STARTING

ENGINE: CLINTON 3.6 H P. Manual Start GENERATOR: Ball bearing construction 1900 Watts, 116

SIZE: 201 x 12 x 16 Shapping Weight 100 lbs boxed Save \$110 00 from \$259 50 list price. Now! FO H. Chicago NET

FOUR-WAY GROBAN OPEN CENTER HYDRAULIC CONTROL

ITEM # 128-Four-way open center control valve with built-in adjustable relief valve factors set at 1000 P S I, Spring londed neutra pos fon For use with one double acting cylinder. In neutral position exhiber is tocked and pump unjoaded. Can be used as single unit or mounted in series. Han he pipe threat the tank outlet by pipe thrend cylinder ports. Finger grip

NAME AND POST ASSESSMENT OF PERSONS ASSESSMENT ASSESSMENT ASSESSMENT ASSESSMENT ASSESSMENT ASSESSMENT ASSESSME

handie. Ship, wt. 104 lbs.

YOB. Chicago \$15.00 Value

37-Piece

METAL STAMPING SET

STAMPS NAMES, NUMBERS, ON WOOD OR METAL

PHAGET, A-Z. NUMBERS 1-9, "A", AND PERIOD. PRECISION HAND TRIMMED, deep cut, hardened TOOL STEEL STAMPS IN FITTED EASY ACCESS CARTON, Made to rigid U.S. Army specifications.

Only \$5.50 per Set

2 ros 10.00 ms



MASTER & SLAVE HYDRAULIC REMOTE CONTROL SET



BRAND NEW!

he along a facult out

4 27-455

U. S. NAVY COST \$92.00 SELF-PRIMING—BRONZE

FOR- Insecticide Spraying

WASH DOWN . SPRINKLING • FUEL TRANSFER

BUILT TO EXACTING U. S. NAVY STANDARDS PERTURES: * Buil hearing construction & NEOPREME Pump Gears & Monei Shaft—L' dia-, 2" long • Sealed steel idler gears.

2 for \$0.00 F.O. B. Chicago

Limited Quantity Order Direct



DEPT.

F. O. B.

The CHRISTMAS GIFT for a Lifetime Enjoyment



THIS PROFESSIONAL Now you can own a Trindi full 115 app Interestal Willestape for less times and er or a misa F rill 1. A ha at a lite als up to a matick.

Operies of rill this to property we de

16 hat stacks from 1 to 1.5 amps Make and repair

and the to get a farm of

to possess to make a f tranner of the stransfer of the matter of the matter of the stransfer of t pit has they dity welding machines.

NOW! HOME CRAFTSMEN CAN

TRINDL PRODUCTS Ltd., Dept. T3-N 1807 So. Clark 51.,

Chicago 16, Ill.






in ALLIED'S 1958

ELECTRONIC SUPPLY CATALOG

BUILD YOUR OWN! SAVE MONEY—HAVE FUN

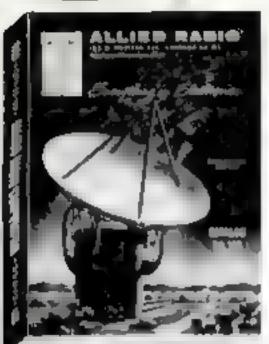





HOBBY KITS



INSTRUMENT KITS



HAM KITS

on Everything in Electronics


WOELD'S LARGEST STOCKS

Everything for Experimenters, Builders, Amateurs, Servicemen, Engineers and Hi-Fi Hobbyists, Get. more for your money in Hi-Fi systems and components; build-yourown KNIGHT-KITH; recorders and phono equipment; TV tubes, antennas, accessories; Amateur station equipment; test instruments; industrial electronic equipment plus the world's largest stocks of parts, tubes, transistors, tools and books. Send today for your FREE 1958 ALLIED Catalog!

Everything in Electronics From One Reliable Source

our 37th year

EASY TERMS AVAILABLE

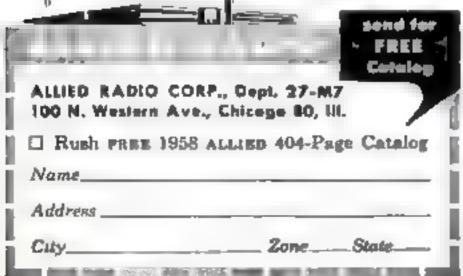

WIID GIL-BILT PARTS-PLAN



ICET'S 10" TILT/ARBOR SAW Sturdy wood ...

a d u codelnie ty and establishance 8150 M as de Plans 1-1 W h 1 como blade > 822 US F O B St Long

12 IN. AND 18 IN. BAND SAWS


The property of the property o

For the party of the 600 wide odd 5% steer 800 and 1965 to married of steer 600 and decreed of steer from 1975 to be bed to the first tender Shaper. 8° T to T be haw temptified stand build easily with hand input only Adverted done to do for 10 years over 33 000 units to use Money back Guarantee pager caracos. Advertis d and

GILLIOM POWER TOOLS

Bept 20-M Lambert Field St Louis 21, Missouri

WDOD and PIDERGLAS



recers, Functionity, sailing boots, cruisers. B to 20 ft., Mahagany dicks, Frames, FREE FREIGHT, SEND FOR FREE CATALOG

leat Plans-Patterns-Frame Kits

by Idover 50 modern book from large scale plans, available with FULL-SIZE potterm, new PRE-FAB frame kits! All types prome to crussers, 6 to 25 ft. Best buy for Ameteurs' SEND ID; for CATALOG.

Includes fibergles points, occusaries



MAKE MONEY SAVE MONEY
Buy Tools, Mardware appliances, photo
equipment spart by pices power lools,
points and thousands of other halconally
edvertised products at WHOLESALE COST TO YO. "SEND FOR FREE 1957 WHOLESALE CATALOG TODAY"

SILVO HARDWARE COMPANY

Dept P5-12, Box 266, Phila, 5, Pa,

RE-POWER NOW with a Y-B oughts-CHEVROLET

MERCURY FORD. • in 3 or 4 Whiler Jeron Jespsters Sta Well, Trucks M.J. and Raiser cars Conversion Rels \$43.25 to \$38.85 it you want fast action tell as waich engine you wish to use give us year Model (2 or 4 Whiler) of your vehicle Send Mis. \$15.00 Dep and we will ship correct hit Ma. CDD Send Just amt. for Prepard shipment Wire, shone or write for free details. (Also kits for Ford 6 angless.)

HOOSIER MACHINE PRODUCTS CO. Pendirion, Oregon

PERSONAL

LISTER IN PRIVATE WHILE YOU! STALLIR AND LICHTER THAN ANY
TILLIA THE POPULATION WE ONLY
TO SEE TATA TANK PROPERTY OF THE COLD
THAN OF THE THAN ANY
TO SEE THE TANK PROPERTY OF THE THAN ANY
TO SEE THE THAN THE THAN A SER IN THE THE THAN A SER IN THE THAN A SE IN 19th VILLE ANTINAL Shap in flashcash state and for those to be in

as and last to use top controls while

as a ciding etc. How open as tiny, soft

pile a some over the carridge LETS You

ONE LITTLE ANTINEE ANTWHERE

a court not use class knowing you are beauting


todio regain sports, news, weather, ste

LIREANTED TO WORK ANTWHERE

ONE YEAR STRUCK E. GLARANTEK

SEND ONLY \$5.00 ck. mot and pay produced to the send only produced to the send only produced to the send only send o

WAR SUMPLUS BANKBUPT STO MOTOR POWER HACK SAW GEAR REDUCTION



the service we handle united to the service and the service an

hitted waw organies from hite MALE DA INI deca e quantity cer a b w. 534 95 Pal

DC WELDING GENERATOR

Prince but never a recall rights were served or post add first plus up turfing or at a fact buy toot



\$23 95 FHR

FURNACE DUCT BLOWER



type how a notation to the type by war force of a first or familiary by the angle of the angle of the type of type of the type of the type of type

Deep all some 10 mil/siz bar with 17 have been all some 10 mil/siz bar with the re-SALE

STORAGE BATTERY

Pewers for Preserving. h Man grade to out Of the cather For \$46 75 FUR



ARMY BLOWER-DRYER-HEATER



trai ducts, blue

· Manylone ben ni oles HT braine has a

Physics gracitume tremendoma output her ed nir Wonderfut for desing form . ghalma how and Wart par un curtore etc. the off the state of the same fire the 192 TO 10R

MYDRAULIC SPEED REDUCER

 Variat e light au le speech re-ducter à la spice français de to spin by a mply throwing a Bandle up to 5 by h poor modest care shop buck lat. lund sawe the 5 of cost



POWER MOUSE


MOTOR Russ on 6 or 12-y bottery nor larers (ear reduction (now in this Full) H-BOC

the to be the result of the total of the tot

 Edeal I r w n how e van the a la are of the nade if there as the area provided to an also bearing nerraptions for use toust 4 \$ \$19.72.)

EXPERIMENTAL RAY TUBE

Signer as to a countril of World for Action within a first term of the Mary 2 to be

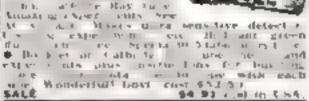

AIR COMPRESSOR BARGAINS

THE PUBLISH THE to a mile your own while lawyet



OTHER OUTSTANDING SURFLUS BUYS d May black a privery no bid at a position and exhibite a flame plantse place electronics

Merr Hr. Steu Augamaria

513.71 Ppd. 8 \$50 Govt, Contributal Sty" Pump 534 61 Peet Surgiar-Fire Alarm Systems Frent Plate In Boggiar Free Alarm System 5.13 % (1.5)
 Frent Plants Water Pipe per (1.13 % (1.5)
 Boot and Vergt, Nand Winch 8 85 (1.6)
 Boot And Vergt, Nand Winch 8 85 (1.6)
 Mand Crank Fish Warm Shocker 3 89 (1.6)
 12 v DC Silge Pump, In a v 2 8 % (1.6)
 1500 w DC AC will Concrate 13 % (1.6)
 Magnete Oak Case Velephone 8 47 (1.6)
 Magnete Oak Case Velephone 8 47 (1.6)
 Step Og Trans, I kW 1 4 v 16 35 (1.6)
 3000 w D E DC 115 v Generalor 69 30 F III

SPECIAL OF THE MONTH!

2500-Wett 60-C AC PLANT

Contractor-Fermer Model

Ill trand new tend-of the petry ave since in the case with PACTORY OVERSTOCK make partable and Just to state Z) Paper party of the war Harris an ate of the state of the Mile of the transport o

· · bkı TO BILL 2 W TO HE 1 wire 113 2 lb y so d an

b lass. I'm arm or home who a mover the far beliefe we wanted of en non- dor the will er

portation and a f ... y campley they thirty awar alife an illus-

· We goarstier it a more buy offered at lase tan norther death heater rest #\$39 BU 1994

DIAL TELEPHONE



Was in higher bury attraction (under the first ba The man of braid is one in the contract of the property of the p | 4 m |

HYDRAULIC EQUIPMENT BARGAINS

Agricultural Children Oly appare \$14.05
Control Valve or \$1.1 and 12.5 and

CONTRACTOR-BUILDER-FARMER LEVEL

de Premissori quality in the Present the Section 1997 to the later than the section of the present of the section of the secti BALE



ORDER PROM AD OF Write for his new

WINTER CATALOG M note agreed the ground agreed the ground the state of ony fremble on many name

BURDEN SALES COMPANY

ldeal Christmas Gift For Any Man



SOLDEN

Acciding by thousands of Homeowners Mechan s and Hotogrees no the welder of has by operated 14H 1 U 44'4 from property werea I it sail At or it live The Ideal gift. with a fife-long use 41miler today on 10 day mother back guarantes

FOUR-WAY WELDER CO., Dept. F3-N 1810 5. Federal St. . Chicago 16, Ill.



AUTOMATIC MARK MIN ··· NAND SAWS TROFITS 6 13 h 14 Write Naw BURR MFG. CO. for Lin Laterplane LOS ANGELST 24. CALIFORNIA 8943 D VENICE BLVD.



FUT STOCK Shop



With ONE HAND you can reach and get. mitantly , exactly the size and type of screw you want. STOCK your SHOP is a smart, new, convenient, and economical way to buy and store screws. It ya few boxes You Il librithem!

IN NEW CLEAR PLASTIC BOXES

FOR EASY DRIVING, ALL WOOD SCREWS ARE SPEEDIZED

An invisible lubricating film on "STOCK your SHOP" Wood Screws makes them easy to drave in even the bardest woods? This free extra feature eliminates bent and broken screws, presents sore and aching hands. Ask for \$10Ch sour \$10P the next time you hay screws.

RLCO TOOL & SCREW CORP., ROCKFORD, ILL.





Here is the low-cost, hand-feed bench model Moulder Planer you have been waiting for' Especially designed for the home workshop, hobbyist or specialty woodworking shop, this rugged machine produces has finishes in equal mack capacities as larger, more expensive models. Selected moulding patterns can be produced in widths up to 53/4" Planing capacity 4"x6" or 11" wide on second past.



SUID FOR TREE BROOMING

of Complete Information

EASTMAN FOUNDRY

h Machine Co., Inc.

113 Pair Street, Locards, M. C. at heater here, on, the 1915



16-page booklet - Send for

your copy lodgy

KESTER SOLDER COMPANY

4254 Wrightwood Avenue • Chicogo 39, Illinois, U.S.A.

Boost Your Power!

FAN RELEASE Automotically disengages

fon at speeds over 40 mph!

At speeds over 35 MPH, standard Stromobile fam waste hursepower! The FAN-O-MATIC now makes your fan a free-wheeling anit, releating wasted horsepower at speeds over 40 MPH.

- Increases Available Harsepower
- . . . up to 15 HP
- Increases Gas Mileage . . . up to 2 mpg.
- Increases Acceleration . . . up to 10 %
- Reduces Engine Noise

Reduces Vibration

PEND

ADAPTABLE TO ALL CARE

SIMPLE TO INSTALL

Tested and proved on Indianapolis Speedway under supervision of U.S. Auto Club.

> At your Garage, Sor. Ste. or Car Dealer! If your dealer does not get have it, ask him to write us for Jobber who can supply him

RADIATOR SPECIALTY CO. - .. CHARLOTTE, NORTH CAROLINA ...

A COMPLETE WORKSHOP IN YOUR HAND

The powerful new Hi-Torque HANDEE grinds, polishes, cuts, saws, engraves, burnobes, cleans A necessity in every workshop. Works in wood, hardened steel, non-terrous metals, glass, ceramics. Parked with power and speed .25,000 rpm) Cool running, fits the hand for pencil-point precision. 110 or 220-y 25 to 60 cycles AC or DC



TOOL OF 1001 USES!

With every type of cutting tool in instal case ... \$32.95

Order your Handes Today!

CHICAGO WHEEL & MFG. CO.


Dept. PS-12, 1181 W. Monroe Street, Chicago 7, 18.

E PAID FOR OUR H with a Foley Saw Filer

ere is the true story of Leslie Patrick—as told by his wife can truthfully say Mr. Patrick made a wonderful investment 1249-7 Foley Bidg. with his Foley Saw Filer, in 1946, we had only a Model A Minneapolis 18, Minn. Pickup and all our belongings were in it. Since then, my Send Free Book husband has done so well with his foley Saw Filing Machine and repair shap that we bought a house and poid for it; - WOHEY bought a new car and built an addition to our house, MAKING and be has got a lot of new machines in the shop. FACTS * Nicest of all, it is all paid for." Name.

Make up to \$3 or \$5 an hour

With the Foley Automatic Saw Filer you can sharpen hand, band, and circular saws just like new. Start in spare time, in your garage or basement. No experience needed Build up a steady, repeat CASH business which will buy YOU a home or new cor. Send coupon for FREE BOOK No salesman will call

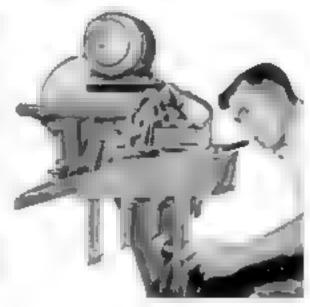

740 POPULAR SE THEF

Address,



0-4" SCALE

Measuras: DIAMETERS THICKNESSES DDD SHAPES

> Measure any object up to 4 inches with this handy caliper and read the size directly on its precisely cali-

in 32nd's. Squeezing handle opens caliper a spring closes it. Narrow curved legs reach bottom of grooves and slots only 1/16 in. wide. Thumb-screw locks measurement for using caliper as a gauge. Indispensable to machinists, woodworkers, draftsman, inspectors, hobbyists.

Buy at your hardware store or order direct. \$200 Money-back guarantee.

ASTER Specialty Co. Inc. 3724 Manitor Ave., Minneapolis 26, Minn.





Rugged construction At your dealer flend postcard for Iree catalogue

Burgess Vibrocrafters, Inc., Dapt. A-126, Graystaks, Ill.



BUILD and FLY Bensen HELICOPTER

Glider type 'copter-easy to build, simple to fly. Can also be mounted on floats or boat No pilot's license required. Order 3-view drawings, specs and photo for \$1. Motor pow-ered Gyro-Copter drawings \$2,

Ask about detailed plans and construction kits. BENNEN AIRCHAFT CORP., Dept. PS-127 P. O. Box 2725, Raleigh, N. C.

AMAZING NEW WINEGARD ANTENNAS GIVE SUPER CLEAR TV PICTURES!



All those NEW EXCLUSIVE PEATURES ore yours . . .

Chairm of 3 Sperkling Colors Sunfact Gold Twi icht B us Starbrite Silver

Complete, Nothing Else Yo Suy Model TL 283 \$29.95

Heat only \$10.96 Fu y for my file sends at Na losses parts. No bag of hights.

Electro Lune high gain design pulls in a clear picture. Cuts should not interference.


Great included of no prire cost. Only one tradile, Easi's ever become phasists.

Special salt-scaling roof fasted-ers. Only & homest seeded.

88" heavy duty attached lead-in

A "DO-IT-YOURSELF" SPECIAL

Just pop t open put it up. No need to leave ladder. He roof climbing.

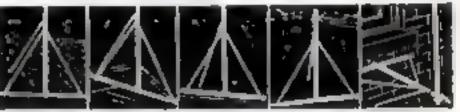

hide of Real East of Roof Penk of Roof

PATENTED

UNIVERSAL MOUNT

Wind tweed at 100 halfol Lablan hi halfo atterdy h on halfo atterdy wires and brackets

Praisot Proding

Ameriment ar fide of House Traplet of

EPERAL! For weak signal areas and reception 36 to 180 square from stations. TIVEGARD rolor reptor Medal CL 4 Anodised \$29.95

(Interferent all other same of and open to the differencementally a special of the hartest

High passerted 17 e encent all channel Wife (2-13 agreems 5 et high front in hard front in hard enter 5 en the decide with any enter desired from the contact in many district encent in a state encent in a green and channels and encent in a green state encent in a green in a decide encent in a green encent in a green encent in a green encent en

Childrestein with Power Buck Class of resemble to street power to street power to see the power to see the plant would need to be a see the plant to the see the se there nothfrut white 1-14 SH

CHT

Mir. Ladrens.

HEW HOME DWHERE ly be your disease his work-bearing again Teign street, su-pectal at our by with mind-ern bearing Auth for free numple of puls abolited alone



COLOR TV. TOO!

Winegord 14 2 ght and subspected in Antenna are does not relied by designed in meet the exacting to be extend for each of the black of the property of the formal and the black of the property of the black of t

Other Winegard Antennas 514.6 Complete nament one be in 48 Solid for free data elects of your dealer data but form Winegard Anten-Schol for free data shorts if your des er does not have W negari Anten-nas, you may prize direct. Prepar send MALLEY elem at a Palliture for on guaranteed.

bestern Turbustable have no limited to the I meleter \$20.00 I Send Twi light I Sunfact Cold
Twilight bloc I Startiste Silver I Send information
at other Winester Assertate from \$14.25 I Send my
free bookspt. Haw To Get Super-Clear Pictures From
My TV Set.

Perso. . Address. Statu. My Dubley of TV Serviceme

3000 Scatten Blvd. Burlington, lowa

Designers and Manufacturers of Warld's Finest TV Antennas



CHAMPION DOARMENT TOOL COMPANY MEADVILLE, PENNSYLVANIA



Be sure its a genuine CHANNELLOCK Look for the trademark on the handle

Professional Mechanics'

TOOL CHEST.



HUOT MFG. CO.

532 No. Wheeler St., St. Poul 4, Minn.



NEW 1958 CATALOG

EASY TO BUILD-Designed for the anoteur. Over 200

200 MODELS-SAVE 2/3

Models. Promito Cruisers, 8 to 21 It, Formed hulls Sent and Custom Rosshod, Seve 50%...Now NEW Son Ray Maldad FIBERGLAS BOAT KITS, Truly professional results, NO uphoop. SAVE 2/3 amonbly time, 12 to 16 ft, Utwatlet and Runabouts SENID 25c for 64 page Boot Kit & 24 page See Ray Catalogs , SENID \$1,00 for both pive "Boating Mandbook". Dealers inquire for franchise.

WRITE NOW! CUSTOM CRAFT, BUFFALO 7.11 N.

"SAW GULLET ANGLE INDICATOR" After years of necessity, we invented it, we now make it, we sell it to saw experts who take pride in high class workmanship, economy of time, and file expense. You set file to precise, predetermined position in only seconds. Designed for Automatic Power saw Filors, Complete with drill & top. \$15.00 in U. S. HOOKER-HALL



In Stock - Immediate Delivery

Clears, speed reducers aprochets, thrust bearings, Sexible couplings, pulleys, etc. A complete line is carried in our Chicago stock Can also quote on special years of any kind. Send us your blusprints and inquiries,

Sand for Complete Catalog No. 220 CHICAGO GEAR WORKS 440-480 M. Oakley Blvd. - Chicago 12, Ill.





of the world's lorgest builders of arc weiders

WAR SURPLUS FREE SAVE # 90%

HOMELITE PORTABLE POWER PLANT Ident

for welding, battery charging, amergency lights for cabina, camps, arctraft, trailers or whelever power preded. Easy rupe pull starting Fully equipped, ready to start, 2000 W 32 V 3 H.P Like NEW. Tested Shock-mounted. Delute type, Not we. 116 lbs. Gross wt. cased \$00 lbs. Appress GOVT COST \$700. Now — \$25.

P2 GENERATOR KIT \$29.95

P2 GENERATOR KIT \$29.95

Balld your own
compacts make up package inch. 1 Gen., 24 V. 200 250

Amps Rhessat, Togges Switch, Welder's Khalld, 30' new
Welding cab.s. Voltage Reg. Electrode Roider Wiring
diagram for hookup as welder Wt. under 100 lbs.

Approx GOVT COST \$550 NEW \$29.96. P2 GEN, as shows, purchased departury - \$24.95.



R1 GENERATOR KIT Juck & Heints or GE. Rated 300 Amps. 24 32 V With same tiems at above. Approx. GOVT COST \$600. Complete 40 lb. kit = \$39.55.

M1 GENERATOR Great for trucks, houts, bat-tery charging A other DC equipment, 50 Amps, 24 32 v. V. 2400-4000 RFM, Wt. 43 lbs, Approx GOVT COST \$300. NEW, Only \$18.50.



MICROMETERS Stark synchle finish frame Zeep to read graduas una up toot NoW Q to cap. \$2.50 ppd. 1.2" cap. \$3.70 ppd.

DOUBLE-ACTION HYDRAULIC CYLINDERS _ 🛶 🖃

hir operated. 800 EMB BEARTHE: 754" length of steads 54" shaft, 144" bore. 53" overall. Approx. GOVT COST \$75, New. \$3.98 co. Special-H for \$7.



BOUBLE SPRING LOADED Zerk lubricated and prounting 74." length of struke, 0 15" shaft 144" bore, 13" overall Spring is removable Approx. COVT COST \$75 NEW \$3.88 sack, 2 for \$7 CLEVIS MOUNTING Struke 1615", Bore 254", Blant dia 1" closed length 37" Wt 3.8 to Approx. GOVT COST, \$300 NEW \$30 sace. 2 for \$32.50.

DUPONT EXPLOSIVE RIVETS Enembed where ever bland riveling required. 1 8", 3 12" 3 10" Round & fat heals. Approx. GOVT COMT \$50 1 000 seasorted for only \$8.00 ppt.



BENDIX GEROTOR PUMP & MOTOR

Use wherever fluid pumping required. Excellent for hydrau in that attems Has \$4" pipe connections. Suitcin return valve adjustable up to \$500 the Mancap, 6 GPM 1 5 H P. 24 V. motor Use on 12 to 36 V. Approx. GOVT COST \$350 NEW \$10 M





CHRONOMETRIC TACHOMETER

CHRONOMETRIC TACHOMETER Built to U.S. Navy & Air Force specs. Standard brand. For counting revolutions per min for any routing shaft. Can be used on speeds up to 2000 RPM Accuracy to 1 10 of 15%. Complete with main & female tips & shock-proof case. COVT COST 887 50. NEW Only 823.05 ppd.

140-3 REDUCTION GEAR

Winches, holds, idea) for motor in golf or boys electric car. Built in twinovab e) DC motor A clutch. It torque to speed, Runs on 6-12 or 24 V Wt. 65 ibs gross. Approx. GDVT. COST \$500 Like NEW \$12.00.

*235-3 REDUCTION GEAR, as above = \$13.50. 140-1 REDUCTION GEAR



8

SUTANE SLOW TORCH KIT Precision soldering, brusing of metal craft. Starts charcoal free Tiny, clean, safe charge. 3500° pinsoint Same Turns on & off Featherest. 7° long. Kit Lack torch, solder tip, eather tiet tartindge—63 % ppd. BLOW YORCH ALONE-my \$1.05 ppd.

HEAVY-DUTY RHEOSTAY HEAVY-DUTY RHEOSTAY ideal for regulating voltage on electric wolders. Rated 5.75 Ohms. 100 Wasta with double windings & dust female 25 amo, 125 V receptances 7" hs x 5½" is 124" D. Shpg. Wt. 2½ (bs. Appens. GOVT COST \$25. Brand New \$1.98.



MAUSER-TYPE VERNIER CALIPER

E" Vernier Chilper. Chaps hardened, imped measuring surfaces Fine engraved and set-1/1000" and 1/10mm 2 gib adjustments Friction thumb re case Reg \$25 Only \$7.00 MELION TOOLMAKERS VERNIER CALIFER—Scales 1/1000" and 1/128" graduations, Holl thumb lock A \$35 value. NEW \$8.00 Leather darrying was for califor—\$1



ASTRO COMPASS MARK II | settley that a commercial and rates. Makes return a set of all controls for our controls as a rates. Makes return a set of all controls for our controls and a set of a



8-16 KOLLSMAN AIRCRAFT COMPASS Ideal for bonts, care, etc. Grad. in 5° increments. I duly fixed. Lighted Poly-plane compensator Panel mounting 315" dis. (see 4.5" deep thacked a tested in our own lab Approx. GOVT COST \$150 Like NEW \$18.98 ppc.

NEW! TERRIFIC! 1958 CATALOG! Thousands of bargains in war surplus & other limits, Humbrods of pictures Send 25c for your copy inday!, First prices in 174 only Other prices Fiel Curver City. Calif Send rash, there, or money order 2012 deposts on CDD.



AIRBORNE SALES CO., mc bipt. PSt257 8501 Steller Drive, Culver City, Calif.






write for free catalog "JBL" meens JAMES B. LANSING SOUND, INC. 3249 Capitas, Las Angeles 39





To be sure you're lucky just call her attention to point out that the whole famuly will benefit. Those long delayed repairs suddenly, they'll be done. And that big project, the new fence, the new room, or the bookease . . . suddenly it's done too, and everyone's so proud of you

and Stoux. ALBERTSON & CQ., INC. SIOUX CITY, IOWA, U.S.A. WRITE



SANDER



ELECTRIC SAW

14"

ELECTRIC



"Christmas! Bah! Humbug!"

The man in the wheel chair leaned into the microphone. "Christmas!" he snarled. "Bah! Humbug!" And, as they had in Christmases past, milhous of young listeners chilled at the mental picture of the baleful Scrooge.

It was a Christmas institution, back in the Forties, this annual reading of Charles Dickens' classic. Its reader was something of an institution himself. In his turbulent lifetime he had been an unsuccessful painter but a good amateur second baseman, a composer whose music was played by the New York Philharmonic, and a model for Frederick Remington.

To most people, though, he was Lionel Barrymore, the actor, and they loved him

He was both crusty and kindly (he loved reading "A Christmas Carol"), adventurous, stubbornly independent in thought and outlook. And game as they come. Although an accident in 1936 imprisoned him in a wheel chair, he went resolutely on—working in motion pictures and making public appearances for nearly twenty years more.

No question but that Lionel Barrymore was one-of-a-kind. Yet the qualities so richly combined in him exist in a large measure among all the 170 million of us who call ourselves

Americans

They're why we are what we are, why our country is one of the strongest on earth. And why there is no wiser investment than an investment in America—through L. S. Savings Bonds, which guarantee the safety of your savings, up to any amount, and the rate of your return. Start buying Bonds today, through Payroll Savings or where you bank. And hold onto them!

Now Savings Bonds are better than ever? Every Series E Bond purchased since February 1, 1957, pavs 3-14% interest when held to maturity. It earns higher interest in the early years than ever before, and matures in only 8 years and 11 months. Hold your old E Bonds, too. They earn more as they get older.

PART OF EVERY AMERICAN'S SAVINGS BELONGS IN U.S. SAVINGS BONDS



The U. S. Government data not pure for this advertisement. It is denoted by this publication in empowerion with the Advertising Council and the Magazine Publishers of America.

"ARCO-SAW" does more than a \$100 portable saw!







Build anything from a bookcase to a bungalow with this rugged portable saw Fits any '," drill Rups & crosscale up to 2" board Exclusive Dado-Arbor ad usts for cutting grooves up to '," wide x 1" deep in ONE CUT! Not even a \$100 pertable saw has a dade cutter. Has Depth-Betel Rup Gages Safely-yoke permits 1 hand operation inc. 5" blade

At Your Gealer or arrive direct on our Unconditional 20-day Maney Back Guarantee Send check, M.O. (ppd.) C.O.O. plus poet,

ARROW METAL PRODUCTS CO.

Dept. P5-12=421 West 203 Street+New York 34, N.Y.



Super Piez No. 11 je nie and despera bazo.
and designe and of the life will a death
rowner in height death puch beve
Nike in a life were in her feeth gegfin shed haw rute from in h \$0.95

"TRU-CIRCLE" saw set sutoteeth at 10" or Inore. \$2.98 mi



FREE CATALOG-OFFT 9-127 D MEBURNET 5000 Hitlywood Wed., Hallywood 20, Cal.




The first of the control of the cont

LABAWCO PLMPS Bol - Mood 3A N

WATER SYSTEM Automatic) 49 95 W H 15 JIP Resource bear Panis 2 C

C IM AF




Your Choice

Gerstoor Chosts are huilt in mone stylus and mass. Chouse yours from our Free Calalog

GERSTNER TOOL CHESTS 354 Columbia St., Dayton 7, Ohlo



dealer's prices 👓 😕 m MASTER MECHANIC factory!




700 Watt Light Plant Poor INCHES

2.3 MV Busy starting Briggs suggested to the suggested to

Them 10 has by brained in furnice phose Porces there has by braine Other range retti the highest amount of the range retti the highest amount of the range of the profiler only area of the celling to be of the celling to the celling to be of
MEAVY DUTY FAM. Semi one ored moine, suitable for spray booths The firm them [10];

HIGH SPECO BARN FAN similar to above but larger, high speed bugs volume of air 12 Fad (1cm 10%).



Itelans to water or just on our You just a part Martin Mer Havis B new Faccat Water Heater fee my faccat plug at in a way gut let and you've flot steaming but water in a ship for fishes absolute washing baby's but it ears 5 m a and safe operates on ordinary 110 v house current—costs only 214 feels but he house current—costs only 214 feels but house current—costs only 214 feels but he may always call be teal are etc. Easily a nicel for manifestation (flem 408) Wt 2 jbs.

GIANT METAL SHEARS



Do line cutt by binds may be inched a py steel pre-

ASTER MECHANIC MFC. CO., Dopt 1 25, Burington, Will.

THE CHRISTMAS GIFT FOR WELD IT JIFFY!



Weld, Cut. Braze Solder; Iron, Steel, Brass, Bronze, Aluminum and other metals safely and easily Make your wrought iron furniture, porch rai ings fences, knick anacks and other metal specialists. With this fine equipment anyone can do professional-like work with little practice. The Dynamic is an industrial type transformer are welder designed to operate from any property wired 110 voit AC line.

Order your Dynamic Industrial type transformer Arc Welder for Workshop or Industrial use today. Order from this ad.

Literature on larger equipment available on request.

DYNAMIC WELDER COMPANY, 1806 S. Federal Street, Dept. D3-N, Chicogo 16, Illinois

EASY PAY PLAN

Low down-payment Pay as you wold Money back guarantee. Complete outfit

Only \$38.50 P.D.B. Factory



ever exceptibled to use retaileg? Hatiqually Advantual Morekandisa . New and Used Ane't Surplus in Facility Claim bett in Excelog, mports' FROM FALAYORFRI Policy a trong you arms of every



At hardware, automotive and sporting goods stores



SPEED REDUCER TRANSMISSION CLUTCH COMBINATION

GOV7. COST \$262.00 SPECIAL

SALES

FULLY GUARANTEED **BRAND NEW**

Speed Reducer gions worth triple this low preset

Reduces speed at a 3 to 1 Ratio 4 These units hard to get at any price!
 Independent Outlet shalls.

• Reduces speed at a 3-to-1 Matter writes units have to get at any prices

• 2 Independent dutiet shafts, each separately controlled by its
adjustable cuttch

• Rated up to 3 & Mr Intectric) or 7 % Mr (gas engine)

• Ball and Taper Relier Searings throughout amounts, suint)

• Rated up to 3 & Mr Intertrice Output shaft 12-y diameter

• Weight 10\$ ibs. Dimensions appear 17-y long x # wide x # high

The series of the Fig. 1 % if the post to a 12-y long x # wide x # high

the series are received to a series on the state of the shaft of the series of the shaft of the series ORDER DIRECT FROM THIS ADI Immediate Delivery)

FREE Catalog of Hydraulics, Generators, Surplus Phone: TAYLOR 8-1366

ROBERTS ELECTRIC CO., Dopt. PS-732, 849 W. Brand, Chicago 22, III.



AMAZING, PERMANENT, NON-ELECTRIC, HIGHLY PRACTICAL.
Londoct interesting experiments. Hundreds of uses Retrieve vs usets attent terms such as pune testie from frush of salt water tonistions totals at the Research of the pune testie from trush of the week block if you are not well pleased for any magnetions week block if you are not well pleased for on steel block is 800 No 8575 (Wt 10 of Has pull of 125 lbs on steel block is 800 No 8575 (Wt 10 of Has pull of 15 lbs on steel block is 800 No 8575 (Wt 10 of Has pull of 15 lbs on steel block is 800 No 8575 (Wt 15 of Has pull of 30 lbs up steel block is 800 No 8575 (Wt 15 of Has pull of 30 lbs up steel block is 800 No 8575 (Wt 15 of Has pull of 30 lbs up steel block is 800 No 8575 (Wt 15 of Has pull of 30 lbs up steel block is 800 No 8576 (Wt 15 of Has pull of 30 lbs up steel block is 800 No 8576 (Wt 15 of Has pull of 30 lbs up steel block is 800 No 8576 (Wt 15 of Ret Bar 10 Nagrock) 10 Nagrock is 800 No 8576 (Wt 15 of Ret Bar 10 Nagrock is 800
MIAMI MAGNET COMPANY, 3240 N. W. 27th Ave., Miami 42, Fig.

Statement of Ownership, Management, Circulation, etc., required by the Act of Congress of August 24, 1912, as amended by the Acts of March 8, 1933, and July 2, 1946 (Title 89, United States Code, Section 233) of Popular Science Monthly, published monthly at New York, N.Y., for Chrisban, J. 1935. October I, 1957

1 The names and addresses of the publisher, managing editors and business manager are Publisher, Popular Science Poblishing Co., Inc., 353 Fourth Avenue, New York 10, NY Editor Howard Allaway, 353 Fourth Ave., New York 10, NY Managong Editor, Frank Rowsome Jr., 350 Fourth

Avenue, New York 10, NY, Business Manager, none.

2 The owners are Popular Science Publishing Company Inc., 353 Fourth Avenue New York 10, NY, Stackholders of Popular Science Poblishing Company, Inc., Mansell and Company, 45 Wall Street, New York 5, NY, Marguestle N Cole, Round Holl Boad, Greenwich, Conn., Robert D. Cole, Round Holl Boad, Greenwich, Conn., Robert D. Cole, Round H.I. Boad, Greenwich, Conn., Nobert D. Cole, Round H.I. Boad, R.I. Boad, D. Cole, Round H.H. Road, Greenwich, Conn., Norcea S. Capen, Capewold Bedford Village, NY, Ada Bell Wilson, 853 Springfield Ave, Surport, NJ, Irma V. Hammond, I. Carstensen, Road, Scarolale, NY, Godfrey, Hammond, I. Carstensen, Hoad, Scarolale, NY, Caroline, L., Flynn, Otter Bock Drive, Greenwich, Conn., Ralph H. Flynn, Otter Bock Drive, Greenwich, Conn. Helen B. Clemon 49 Wood-bine, Larchmont, N Y.: Margaret C. Jenning, 12 Overhook Drive, New Cansan, Conn., Jean L. Cole Van Buren, Giliam Lane, Rivernde, Conn.

3 The known bondbolders, mortgagees and other security holders owning or holding I percent or more of the total amount of bonds, morigages or other securities are none.

4. Paragraphs 2 and 3 melode, in cases where the stockholder or security holder appears upon the books of the company as truster or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, also the statements in the two paragraphs show the affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bone fide owner

(signed) Halph H. Flynn, Publisher

Sworn to and subscribed before me this 23rd day of September, 1957. Esther Eyl Talbert, Notary Public, State of New York No. 24 9276475 Qualified in Kings County, Certificates filed with. New York and Kings Co. Clks & Register. Commission expires March 30, 1958. (Seal)


READYCUTHOME

YOU SAVE the stems which help make today's building cost expensive, high labor cost, contractor's profit and overhead, insurance, architect's fees. Cut to Fit eliminates usual lumber and material waste, also costly mistakes. Any one can assemble. Simple, easy to lollow plans furnished and each part numbered. Complete with all lumber, coofing, nails, glass, hardware, paint doors, windows Fre ght paid. Low cost building plans sold separately if desired. 37 Homes and Floor Plans.







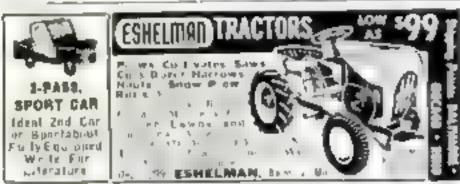

WITH NEW FOLEY PRECISION GRINDER

Make \$3 to \$8 an hour in your own spare time business but cost machine sharpens circuse share follow mover blades, so share, does sanding, pointhing, buffing. Easy to operation or experience needed Send coupen today for Free circular. No sairamen will call

FOLKY MFG. COMPANY 1276-7 Faley Bidg. Minorapolis 18, Mina.

Send Free Circular on Foley Precision Grinder.



TRY SUPERSHOP FREE

- WE PAY FREIGHT
 - YOU BE THE JUDGE
 - EASY PAY PLAN

 Why does Power Tools Inc. make such an unusual offer? Our business is menufecturing and selling

power tools direct to people like yourself. We have had experie ence with hundreds of thousands of people regarding their home workshop requirements. Supershop meets these regulrements. This has been proven.

The combination of direct se !ing, advanced design and

efficient manufacturing enables us to give the greatest power tool value in America today. That is why we have the courage to make you this offer.

This free trial is truly free. The machine is prepaid to your door and if It does not satisfy you, you return it at our expense. If you keep Supershop you pay the low factory-to-you cash price - or easy payments to fit your budget.

Write for free information. Mail the handy coupon or send a postcard. Well mail you colorful brochures on Supershop — and full details on the FREE TRIAL HOME OFFER. Absolutely no obligation.






202 YATES AVE. POWER TOOLS INC. BELOIT, WISCONSIN

TOOLS		•		
complete	inform.	E brocheres aften about under no o	t the Free	Home

	Trial Plan. I am under no obligation	Hom
NAME_		
ADDRES	<u> </u>	
CITY	STATE	

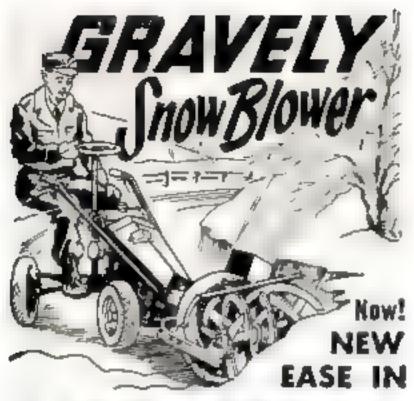

SNOW REMOVAL

With Steering Sulky and Self Starter


- Powerful Gravely Tractor—with pushbutton Starter, New Steering Sulky and Snowblower-make snow removal almost child's play!
- You can blow snow deep or light, wet or dry — wherever you want it, with fingertip maneuverab ity 48" but Plan also available. 25 year found attachments . . . All on Easy Pay Plan


Write today for PREE 24 page ' Power vs Drudgery' Booklet!



LD-TESTED







4549 N CENTRAL AVE

CLOGGED SEWERS 医黑洲亚洲多亚属 了什么 じゅうてして アレシがのけがる かけんしゃ

through the list doub autrestuced to a book t on machines which enable the If or Owner Jan Groot Ma blenance Man to Bot O h mself

I thought rail operate this new flod-ting fool which is who ried down she train ID & 100 SCHOOLS BUNKS DATIOTIES. TOTLETS I LANGUS, FLANDE DRASHS HOUSE TO STREET BEAVER can be coursel of Bass terrane Paper while Cutter blades can be acited for rethis ng Seds. A hee Escapert in Secolah. Plexi sky

Another new unit is the Miller Electric Ros for which has be ented cutters that expend and matter is to the size of the table It will clean it heavy descriptions. In pipe Humeters T to 12" Smarker Sixes SAVED Tear this Alice and write cour in me mit I melities a besi le it for FREE BOOKLET on Harm and I were the a MILLER SEWER HOD, Dept PSH

CHICAGO 30. ILLINOIS

PLANS . PATTERNS . FRAME PACS

World's Largest Selection, Over 200 new plans, Full Stan . patterns, from pace. Designed for the emotive Prome, a recers, cruisers, off files, inboords, outbourds, in wood, plywood, steel. New longitudeal stressed models with revolutionary bull-head construction. Light, sup it it strong.

SPECIAL OFFER . . . Plan Catalog . . . plus


Hardward and Accessarias estalog \$2 00 CUSTOM-CRAFT-BUFFALG ZM NEW YORK



Sol 4 4

120 PAGE PLAN CATALOG PLUS " 200 PAGE TROAT # BOAT BALDING FIREE GLASSING OUTFITTING, EIC.

Only \$2.50

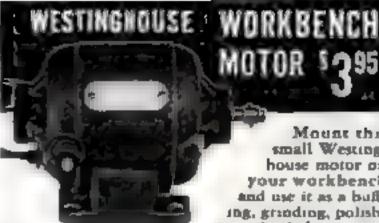

Mount this small Westinghouse motor on your workbench and use it as a buffing, granding, polishing wheel. It can also

be fitted for light drilling, sanding, etc., or equipped with flexible shaft. Develops 1/60 h.p. at 7,000-8,000 r.p.m. on 110 volus AC. Some can be used on AC and DC. Shaft is 1/4"; case has four mounting holes. Surplus and a solid bargain. \$3.95 ppd.

CHARLES AND A COLUMN TAKES CO. | CO. | CO. | A CO. | A CO. | CO. | CO. | CO. | CO. | A CO. | CO.

OUTDOOR LIFE FISHING BOOK - \$1.00

Shows How to Get More Fish!

Just off press-New OI TDOOR LIFE FISH ING BOOK by P. A. Parsons tells how, where, when to get more trout, busy, panfish, muskie, salmon, pike, pickerel, walteye, etc. Over 100 pictures, 25 chapters jammed with data on fly easting, built casting, spinning, trolling, wet and dry fly know-how, bugs and poppers, natural baits, lots more. Jl ST 81.00, postpaid! Act fast! Tipy price, limited quantity means list sellout. Send name, address, \$1.00 to

POPI LAR SCIENCE, Dept. PF1257 353 4th Ave. N.Y. 10, N.Y.

HELP STOP DEATH ON THE HIGHWAY



WHERE TRAFFIC LAWS ARE OBEYED DEATHS GO DOWN!

SUPPORT YOUR LOCAL SAFETY ORGANIZATION

Published as a public service in cooperation with The Advertising Council

What a "HANDY NEW YEAR" Gift for Christmas!



ONE-MAN SAWMILL AS ... 5000

Tuke BELSAW Pertuble Sermill right to the trees—here not voteable tember for home and form — poll to lacel yords — make po to \$50 a day contain serving for neighbors. BELSAW lants a lifetime, the cross needed. Press with tracker or note require. Degracers got traceland remain, Sand taker for FREE BOUK.

BELSAW MACHINERY CO. 2478 Field Bids. Renses City 11 Missouri



WELDER 24.85 FOR

Complete with averything Ready to plug in. 110 voits AC. Draws 15-30 Amps. Produces 75 Amps. 5 heats. Welds metal from 1/16" to 3/32" standard rade. Suprenteed intenditionally. 10-day trial, \$8. deposit on C.O.D. Does everything walders costing up to \$75. de. 1/6" welder \$7.95 plus 50c for peatage.

ESSAY MFG. CO., INC., Dept. 47, Quincy 69, Moss.



KING MIDGET ALI. NEW First model change in six years. New budget, new chasses, new engine four wheel hydraulic brakes. Still World's Lowest Priced Car Drive it for 75c per week Rider Agents Wanted. Earn your own car Get the facts. Send 25e for 32 page picture book with complete details, dealers price, etc. if there is no dealer near you

MIDGET MOTORS CORPORATION, Albert 2, Ohio

SPEED-REDUCING PULLEY





Provides Correct Speed and Power to Drill Up to 13/5" with 1/2 H.P. Mater

Amazing new internally geared speed reducer doubles drill press capacity. Greater power, greater efficiency, greater productivity. Provides the correct speed and power


for larger drilling, reaming, tapping and boring on light presses. Easily installed in five minutes. Adaptable to all type machines. Spindle speed range approx 45 to 3000 RPM. Made in 3 motor shall sizes; 2"-2"-2". Write for literature.



THE PULL-GEAR CO.

25429 Mound Road Center Line, Michigan

DEALERS: Chicago, III - Chicago Supply & Tool Co. Cieveland, Ohio- Reynolds Machinery Co. Los Angeles, Calif.—Aimquist Brothers New York City- Rudolf Bass

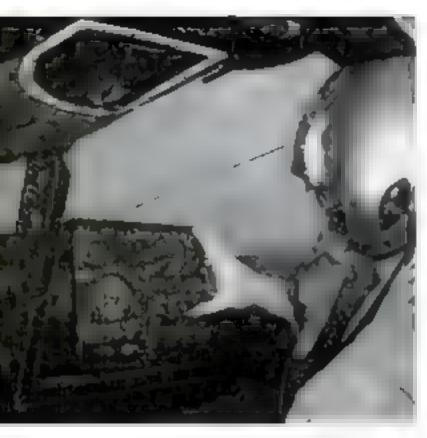

tobot navigates Navy jets

A NEW automatic navigation device for igh-speed jets can send and receive two ontinuous radar beams on one transmiter-receiver. It is simple, compact, shows esition visually on the instrument panel and keeps the plane on course.

Ryan Aeronautical Co., which builds it or the Navy, has adapted it for antiabmarine copters and commercial jets.



Short cab holds engine, too


THE new Kenworth CSE (cab-sur-rounding-engine) tractor cab, only 54 inches long, is designed to provide maximum loading space in hauling a 25-foot double—a semitrailer hitched to the platform and a full trailer following behind.

It has weatherstripped, bulkhead-type doors and a built-in heater and defroster for either recirculated or fresh air.



lidget car puts on new dress

Its first major design change in six ears gives the King Midget a sporty new ody in sophisticated colors. It has a nieter, snappier engine, four-wheel hyraulic brakes, a new clutch and a folding instead of a detachable top.

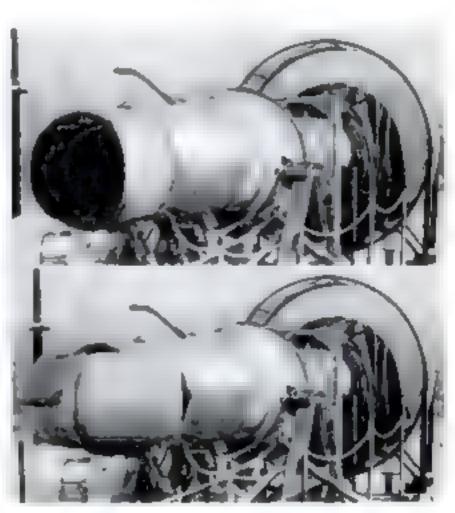

Swinging doors help brake jet

Shown on a test stand in open (top) and closed position, the deflector doors above are Curtuss-Wright's version of a thrust reverser to let jets of 2,000- to 25,000-pound thrust land on short runways. They are controlled mechanically.

12RR-H8H-D3CX

Special Christmas Offer!

FREE '20 Savings Certificate

with Porter-Cable's revolutionary

6-in-1 ROUTO-JIG

Now, just in time for Christmas! A Free Gift Certificate with every Porter-Cable Routo-Jig-that saves you \$20.00 when you buy this revolutionary 6-in-1 power tool complete. With its carefully engineered, precision-built attachments, Routo-Jig is a high-speed router, a jig saw, a shaper, a finishing sander, a power plane-even a handy lawn trimmer!

As illustrated, the basic Router costs only \$42.50. And as shown below, you save as much as \$20.00 (including a \$4.00 saving on accessory Dovetail Templet) on Routo-Jig attachments! See the Yellow Pages for nearest Porter-Cable dealer—or write for free 48-page Routo-Jig manual.





SHAPER! Husky Shaper Table makes Routo-Jig a precision Shaper and Joiner, for professional rabbet cuts, moulding cuts, joiner work. Shaper Table regularly \$12,00—with Gift Certificate....\$5.00



power Plant! Route-Jig converts quickly into a smooth-cutting power plane. Instant bevel and depth adjustments. Plane attachment regularly \$12.50—with Gift Certificate.....\$9.50







PORTER-CABLE MACHINE COMPANY
715B N. Salina Street, Syrocuse B, N. Y.
saws - sandors - shapers
drills - routers - planes

In Canada; write Porter-Cable, Ltd., Box 5019, Landon, Ont. Canadian prices slightly higher.

Gogging and mismile





HARDENED BED WAYS

Hardened and precision ground bed ways can be supplied in lieu of regular at small extra cost-also hardened and ground cross-feed screw.

for accurate, low-cost machining

These lathes are popular in the toolroom, production shop, or wherever varieties of precision parts are machined. Users prefer them for their simplicity and practically effortless handling. Job set-ups and tooling changes are made so quickly and easily that down-time is held to a minimum. A very complete line of attachments simplifies tooling. Send coupon for complete information.

SPECIFICATIONS

Swing-131/4" over bed and saddle wings, B" over cross slide.

Distances Between Centers-28", 40", 52" maximum.


Collet Capacity-1" maximum (Collets interchangeable with South Bend 10"-1" Collet, 141/2", 16" and 16-24" lathes).

Spindle Speeds—Six to Sixteen 40 to 940 r.p.m. or 20 to 940 r.p.m. approximately.

Power Longitudinal Feeds-48 R.H. or LH., .0015" to .0841".

Power Cross-Foods-48, .0006" to .0315".

Thread Cutting-48 R.H. or L.H. pitches, 4 to 224 per inch.




I PLEASE SINK	INFORMATI	ON CHE	22501	-		-
! /	四人包	8	1		0	70
	一	*	En B			I C
O send 10"	10" to 18-24" PLOOR LATHER	DESLI PRESSES	W' & 1° Colle	TOO SECOND	CRE T' SENCH	MADENES
Name			Street			
City			State			

Building Better Tools Since 1906 . SOUTH BEND LATHE . South Bend 22, Indiana

THE WAILMAN

REMEMBER THE MORNING I FOUND ANDY SHOLL TRYING TO TAKE ON THE WHOLE NEIGHBORHOOD...



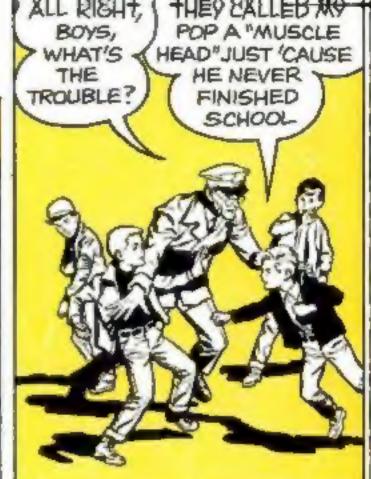

EEN FIGHTING
AGAIN! OH, IF <
LEAVE THIS
EIGHBORHOOD

MAYBE THIS
WILL HELP...
IT'S FROM
INTERNATIONAL
CORRESPONDENCE
SCHOOLS

SURE ENOUGH, WITHIN A FEW WEEKS I BEGAN TO DELIVER MORE LETTERS AND PACKAGES FROM I.C.S.

DAYS. ANDY'S FATHER IS TAKING A CORRESPONDENCE COURSE,



IT WASN'T LONG BEFORE I BEGAN TO NOTICE CHANGES IN THE SHOLL'S HOME. LITTLE THINGS. NEW CURTAINS. FLOWER BOXES. FRESH PAINT. AND THEN, ONE MORNING...



FEW WEEKS LATER, MRS. SHOLL ET ME AS I CAME UP THE STEPS...

HAS ANDY TOLD YOU THE NEWS?
WE'RE MOVING. MR. SHOLL IS
BEING TRANSFERRED. HE'S TO BE
A SECTION LEADER IN THE NEW





I'VE SEEN IT HAPPEN OFTEN.

I.C.S. NOT ONLY CAN CHANGE
PEOPLE'S ADDRESSES, IT CAN CHANGE
THEIR WHOLE WAY OF LIVING.



MODEL RAILROADING



in your home! Gilbert "HO" are authentic miniatures of real trains. Precision-made locomotives and cars are masterpieces of elaborate detail. Choose from six exciting train sets, priced as low as \$24.95. Make sure it's the most realistic . . . , . insist on Gilbert "HO", the leader in America's fastest growing hobby.

GILBERT

the only HO trains with: REAL PUFFING SMOKE

- CHOO-CHOO" SOUND EFFECTS
- BUILT-IN R.R. WHISTLES



THE A.C. GILBERT CO. NEW HAVEN 6, CONN.

USE COUPON FOR FREE CATALOGS

	HO Catalog		Flyer Trains
_	(full-color printing)	trains)	scole electri
	Chemistry, Micro-	160-page	Model Roil-
_	scope, Erector Sets)	road h	SE 25¢)
NAME		(6,100	